
BROWN COUNTY PORT DEVELOPMENT PROJECT

1530 BYLSBY AVENUE GREEN BAY, WISCONSIN

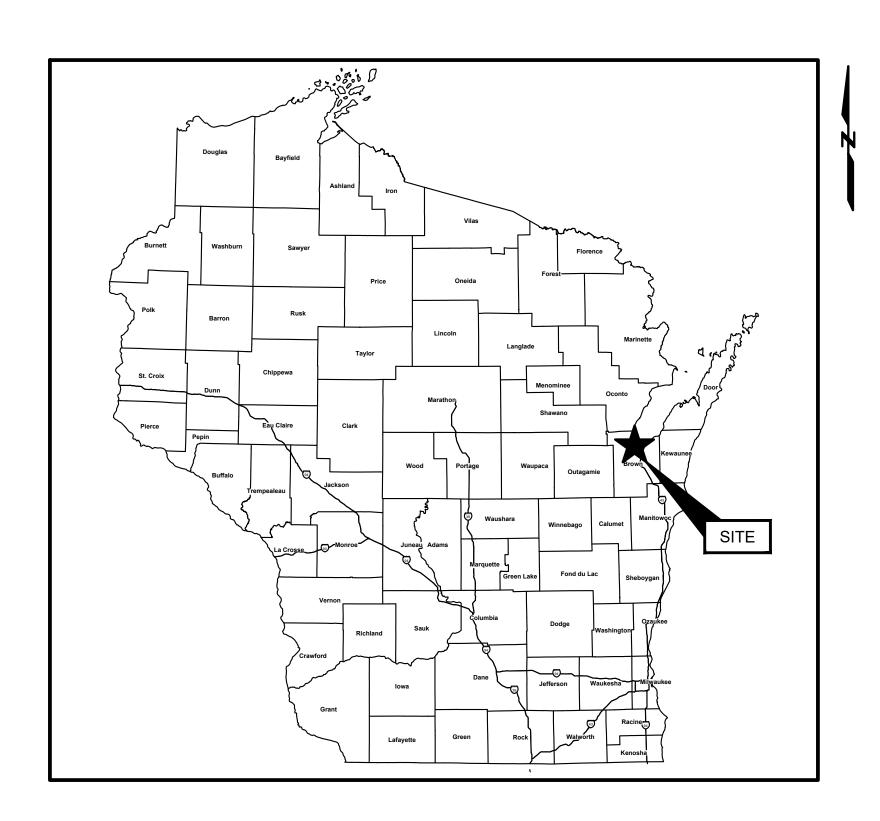

STATE MAP

(NOT TO SCALE)

WATER

WASTEWATER

NATURAL GAS

ELECTRIC

UTILITIES AND INTERESTED PARTIES:

NEW WATER

GREEN BAY WATER UTILITY 631 SOUTH ADAMS STREET, GREEN BAY, WI 54301

631 SOUTH ADAMS STREET, GREEN BAY, WI 54301 920-448-3480

2231 N QUINCY STREET, GREEN BAY, WI 54302 920-432-4893 WISCONSIN PUBLIC SERVICE (WPS)

700 NORTH ADAMS STREET, GREEN BAY, WI 54307 800-450-7260

WISCONSIN PUBLIC SERVICE (WPS)

ELECTRIC

WISCONSIN PUBLIC SERVICE (WPS) 700 NORTH ADAMS STREET, GREEN BAY, WI 54307 800-450-7260

801 O KEEFE RD, DE PERE, WI 54115 (920) 338-6500

2350 S ONEIDA ST, GREEN BAY, WI 54304 833-949-0036

AT&T COMMUNICATIONS

THIS DOCUMENT, AND THE IDEAS AND DESIGNS INCORPORATED HEREIN, IS AN INSTRUMENT OF PROFESSIONAL SERVICE, IS THE

PROPERTY OF GEI CONSULTANTS AND IS NOT TO BE USED, IN WHOLE

OR IN PART, FOR ANY OTHER PROJECT WITHOUT THE WRITTEN

615 S MILITARY AVE, GREEN BAY, WI 54303 844-535-6390

TDS TELECOM 789 S ONEIDA ST, ASHWAUBENON, WI 54304 866-571-6662

AUTHORIZATION OF GEI CONSULTANTS.

AMERICAN TRANSMISSION CO

COMMUNICATIONS


COMMUNICATIONS

IMPROVEMENTS COVERED IN THESE PLANS SHALL BE IN ACCORDANCE WITH THE WISCONSIN DEPARTMENT OF TRANSPORTATION 2025 STANDARD SPECIFICATIONS FOR CONSTRUCTION.

THE PLACEMENT OF PAVEMENT MARKINGS SHALL BE DONE IN ACCORDANCE WITH THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES, 2011 EDITION, AS AMENDED.

GENERAL NOTES

IMPROVEMENTS COVERED SHALL BE IN ACCORDANCE WITH THE FOLLOWING STANDARDS: ACI 318, USS STEEL SHEET PILE DESIGN, AISC 14TH EDITION, FHWA GEC NO. 7, AND FHWA GEC NO. 4.

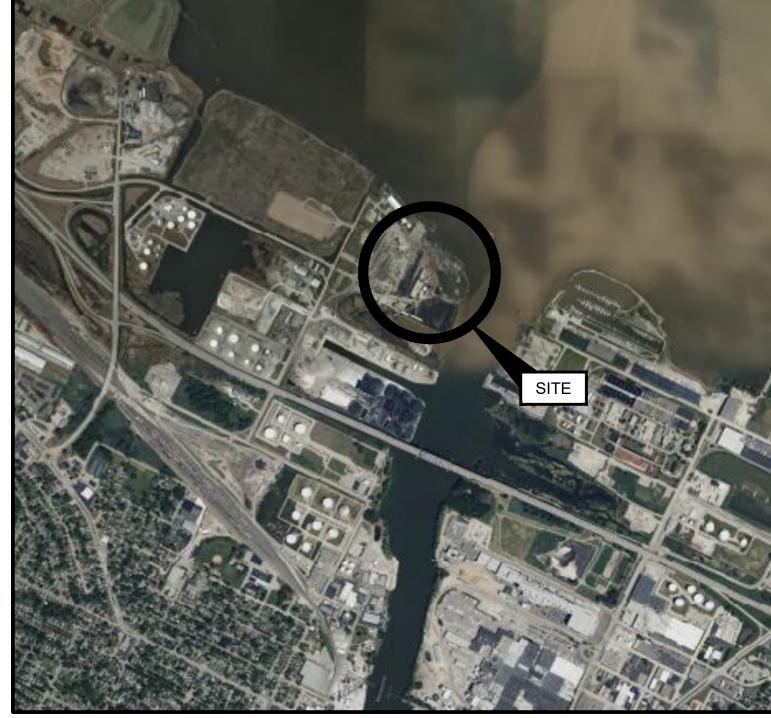

SOURCE:
© 2023 MICROSOFT CORPORATION © 2022 MAXAR © CNES (2022) DISTRIBUTION AIRBUS DS

SITE LOCATION MAP

(NOT TO SCALE)

PREPARED FOR:

BROWN COUNTY, WI PORT & RESOURCE RECOVERY 2561 BROADWAY ST GREEN BAY, WI (920)492-4950



PREPARED BY:

GEI CONSULTANTS, INC. 3159 VOYAGER DRIVE GREEN BAY, WI 54311 (920)455-8200



SHEET INDEX

SHEET INDE	^	
DRAWING NO.	SHEET NO.	TITLE
G-100	G-100	COVER
G-110	G-110	GENERAL NOTES
G-120	G-120	LEGEND
C-100	C-100	EXISTING CONDITIONS
C-110	C-110	SOIL EROSION AND SEDIMENT CONTROL AND DEMOLITION PL
C-120	C-120	PROPOSED SITE PLAN
C-130	C-130	GRADING PLAN
C-140	C-140	PROPOSED DREDGING PLAN
C-141	C-141	PROPOSED DREDGING SECTIONS
C-200	C-200	ACCESS ROAD UTILITY PLAN 0+00 TO 10+00
C-210	C-210	ACCESS ROAD UTILITY PLAN 10+00 TO 13+00
C-303	C-303	PROPOSED SECTIONS
C-500	C-500	SITE DETAILS
C-501	C-501	SITE DETAILS
C-503	C-503	WATER DETAILS
C-504	C-504	STORM DETAILS
C-505	C-505	SANITARY DETAILS
SM001	SM001	DOCKWALL GENERAL NOTES
SM002	SM002	DOCKWALL SEQUENCING CONSTRAINTS
SM101	SM101	DOCKWALL PLAN & ELEVATION
SM301	SM301	DOCKWALL SECTIONS - SHEET 1 OF 3
SM302	SM302	DOCKWALL SECTIONS - SHEET 2 OF 3
SM303	SM303	DOCKWALL SECTIONS - SHEET 3 OF 3
SM311	SM311	SECTIONS - SHEET 1 OF 4
SM312	SM312	SECTIONS - SHEET 2 OF 4
SM313	SM313	SECTIONS - SHEET 3 OF 4
SM314	SM314	SECTIONS - SHEET 4 OF 4
SM401	SM401	PLAN - SOUTH END
SM402	SM402	PLAN - DOCKWALL DETAILS
SM403	SM403	PLAN - NORTH END
SM501	SM501	DOCKWALL DETAILS - SHEET 1 OF 3
SM502	SM502	DOCKWALL DETAILS - SHEET 2 OF 3
SM503	SM503	DOCKWALL DETAILS - SHEET 3 OF 3
SM504	SM504	MARINE BOLLARD DETAILS
SM505	SM505	CRANE PAD DETAIL
SR301	SR301	REVETMENT SECTIONS 1
SR302	SR302	REVETMENT SECTIONS 2

FOR BID

					DWG. NO.
					G-100
				NOT FOR	SHEET NO.
Α	10/22/2025	ISSUED FOR BID	MJV	CONSTRUCTION	1 OF 37
NO	DATE	ISSUE/REVISION	APP		' ' ' ' '

GEI PROJECT NO. 2201593

ROBERTS, ISAAC b:\Working\brown county wi\2201593 port property development\00_CAD\Design\Sheets\Cover.dwg - 10/23/2025

GENERAL NOTES:

- 1. EXCEPT WHERE OTHERWISE INDICATED ON THESE PLANS OR IN THE PROPOSAL AND SUPPLEMENTAL SPECIFICATIONS CONTAINED THEREIN, ALL MATERIALS AND WORKMANSHIP SHALL BE IN ACCORDANCE WITH THE STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION, CURRENT VERSION, THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES, AND THE BROWN COUNTY STANDARD SPECIFICATIONS.
- 2. PROJECT COORDINATE SYSTEM: HORIZONTAL DATUM: NORTH AMERICAN DATUM OF 1983 HIGH ACCURACY REFERENCE NETWORK (HARN). WISCONSIN COUNTY SYSTEMS: BROWN COUNTY, US FOOT (HARN/WI.BROWNWI-F). VERTICAL DATUM: NORTH AMERICA VERTICAL DATUM OF 1988 (NAVD88) NOTE: TO CONVERT FROM THE CHART DATUM (INTERNATIONAL GREAT LAKES DATUM OF 1985(IGLD85)) TO NAV88: IGLD85 + 0.44'+ NAVD88.
- 3. THE PROPOSED IMPROVEMENTS COVERED BY THESE PLANS ARE IN ACCORDANCE WITH THE AASHTO; A POLICY ON GEOMETRIC DESIGN OF ROADS AND STREETS, CURRENT VERSION OR PER THE CITY OF GREEN BAY STANDARD SPECIFICATION & CONSTRUCTION STANDARDS.
- 4. ANY EXISTING UTILITIES, PAVEMENT, CURBS, SIDEWALKS, STRUCTURES, TREES, ETC., NOT PLANNED FOR DESTRUCTION OR REMOVAL THAT ARE DAMAGED OR REMOVED SHALL BE REPAIRED OR REPLACED AT THE CONTRACTOR'S EXPENSE.
- 5. THE CONTRACTOR SHALL VERIFY ALL DEPTHS AND LOCATIONS OF EXISTING UTILITIES PRIOR TO ANY CONSTRUCTION. ANY DISCREPANCIES WITH THE CONSTRUCTION PLANS FOUND IN THE FIELD SHALL BE BROUGHT IMMEDIATELY TO THE ATTENTION OF THE ENGINEER WHO SHALL BE RESPONSIBLE FOR REVISING THE PLANS AS APPROPRIATE. PLAN REVISIONS MAY NEED CITY COUNTY APPROVAL
- 6. MANHOLE FRAMES, COVERS, VALVES, CLEANOUTS, ETC. SHALL BE RAISED TO FINISHED GRADE PRIOR TO FINAL PAVING CONSTRUCTION PER WISCONSIN DEPARTMENT OF TRANSPORTATION STANDARD DETAILS.
- 7. ALL AREAS DISTURBED OR THOSE EXPOSED DURING CONSTRUCTION SHALL BE RE-VEGETATED IN ACCORDANCE WITH THE PLANS AND SPECIFICATIONS. RE-VEGETATION OF ALL DISTURBED OR EXPOSED AREAS SHALL CONSIST OF SODDING OR SEEDING, CONSISTENT WITH THE LANDSCAPING PLANS, AND APPROVED BY THE LANDSCAPE ARCHITECT. HOWEVER, THE TYPE OF RE-VEGETATION MUST EQUAL OR EXCEED THE TYPE OF VEGETATION PRESENT BEFORE CONSTRUCTION.
- 8. PRIOR TO ANY CONSTRUCTION, A PRE-CONSTRUCTION CONFERENCE BETWEEN THE CITY OF GREEN BAY, THE DEVELOPER, THE CONTRACTOR, UTILITY COMPANIES, ANY AFFECTED PARTIES, AND ANY OTHER ENTITY THE CITY OR DEVELOPER MAY REQUIRE SHALL CONVENE.
- 9. THE DEVELOPER OR HIS/HER DESIGNATED AGENT SHALL KEEP ACCURATE RECORDS OF ALL CONSTRUCTION THAT DEVIATES FROM THE PLANS. THE DEVELOPER OR HIS/HER DESIGNATED AGENT SHALL FURNISH THE CITY OF GREEN BAY, AND OWNER, ACCURATE "AS-BUILT" DRAWINGS FOLLOWING COMPLETION OF ALL CONSTRUCTION. THESE "AS-BUILT" DRAWINGS SHALL MEET WITH THE SATISFACTION OF THE OWNER, PRIOR TO FINAL ACCEPTANCE. FINAL "AS-BUILTS" DRAWINGS SHALL BE DELIVERED TO THE COUNTY IN PAPER FORM AND IN CAD .DWG FORM.
- 10. THE CITY OF GREEN BAY CITY COMMISSION SHALL NOT BE PETITIONED FOR ACCEPTANCE UNTIL ALL NECESSARY EASEMENT AND/OR RIGHT OF WAY DEED DOCUMENTS HAVE BEEN SIGNED AND RECORDED, AND ALL MATERIALS, PIPING, STRUCTURES HAVE BEEN INSPECTED AND TESTED TO THE CITY ENGINEER'S APPROVAL.
- 11. ALL UTILITY CONSTRUCTION WORK TO BE ACCEPTED BY THE CITY OF GREEN BAY INTO THEIR UTILITY SYSTEM AND ALL WORK IN PUBLIC RIGHTS OF WAY OR EASEMENTS MUST BE DONE IN ACCORDANCE WITH WISCONSIN DEPARTMENT OF TRANSPORTATION AND CITY OF GREEN BAY STANDARDS AND SPECIFICATIONS.
- 12. WHEN CONSTRUCTION IS BEING CARRIED OUT WITHIN EASEMENTS, THE CONTRACTOR SHALL CONFINE HIS/HER WORK TO WITHIN THE PERMANENT AND ANY TEMPORARY EASEMENTS. PRIOR TO FINAL ACCEPTANCE, THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING ALL TRASH AND DEBRIS WITHIN THE PERMANENT AND TEMPORARY EASEMENTS. CLEAN-UP SHALL BE TO THE SATISFACTION OF THE ENGINEER
- 13. PRIOR TO ANY CONSTRUCTION, THE OWNER OR HIS/HER DESIGNATED AGENT SHALL APPLY FOR AND SECURE ALL PROPER PERMITS FROM THE APPROPRIATE AUTHORITIES, SUCH AS, BUT NOT LIMITED TO, THE CITY OF GREEN BAY, WISCONSIN DEPARTMENT OF NATURAL RESOURCES, BROWN COUNTY, ETC. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL NECESSARY CONSTRUCTION PERMITS, SUCH AS, BUT NOT LIMITED TO, RIGHT-OF-WAY CONSTRUCTION ACCESS. SOIL EROSION AND SEDIMENT CONTROL. AND ANY ADDITIONAL PERMITS NECESSARY TO COMPLETE THE PROJECT IN ITS ENTIRETY.

PROJECT SAFETY NOTES:

1. PROJECT SAFETY SHALL BE IN ACCORDANCE WITH THE LAWS OF THE STATE OF WISCONSIN AND THE WISCONSIN OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION'S CURRENT REGULATIONS.

WATER AND WASTEWATER NOTES:

- 1. THE CONTRACTOR SHALL CONTACT THE CITY ENGINEER TO COORDINATE UTILITY MAIN, STRUCTURE, AND UTILITY TIE-INS AND NOTIFY HIM/HER AT LEAST 48 HOURS PRIOR FOR INSPECTION SERVICES.
- 2. ALL WATER AND WASTEWATER TAPS INTO THE CITY OF GREEN BAY PUBLIC SYSTEM SHALL BE DONE BY THE CITY OF GREEN BAY PUBLIC WORKS DEPARTMENT. A MINIMUM OF 72 HOURS NOTICE WILL BE GIVEN TO THE DEPARTMENT FOR WORK REQUIRED FOR TAPPING ACTIVITIES. PERMITS ARE REQUIRED FROM THE CITY OF GREEN BAY ENGINEERING DEPARTMENT FOR WATER. WASTEWATER. AND STORM WATER TAPS INTO THE PUBLIC SYSTEM.
- 3. THE CONTRACTOR MUST OBTAIN A WATER METER FROM THE CITY OF GREEN BAY PUBLIC WORKS. DEPARTMENT FOR ALL PUBLIC WATER USED DURING CONSTRUCTION.
- 4. THE CONTRACTOR, AT HIS EXPENSE, SHALL PERFORM QUALITY TESTING FOR ALL WASTEWATER PIPE INSTALLED AND PRESSURE PIPE HYDROSTATIC TESTING OF ALL WATER LINES CONSTRUCTED AND SHALL PROVIDE ALL EQUIPMENT (INCLUDING PUMPS AND GAUGES), SUPPLIES AND LABOR NECESSARY TO PERFORM THE TESTS PER CITY OF GREEN BAY SPECIFICATION REQUIREMENTS. QUALITY AND PRESSURE TESTING SHALL BE MONITORED BY THE INSPECTOR FROM THE CITY OF GREEN BAY ENGINEERING DEPARTMENT.
- 5. THE CONTRACTOR SHALL COORDINATE TESTING WITH THE CITY INSPECTOR AND PROVIDE NO LESS THAN 24 HOURS NOTICE PRIOR TO PERFORMING DISINFECTION, QUALITY TESTING OR PRESSURE TESTING.
- 6. THE CONTRACTOR SHALL NOT OPEN OR CLOSE ANY VALVES ON THE PUBLIC SYSTEM. VALVE OPERATION MUST BE COORDINATED WITH THE CITY OF GREEN BAY PUBLIC WORKS DEPARTMENT.
- 7. FOR PROTECTION OF UNDERGROUND UTILITIES AND IN CONFORMANCE WITH PUBLIC ACT 53, THE CONTRACTOR SHALL NOTIFY MISS DIG A MINIMUM OF THREE FULL WORKING DAYS, EXCLUDING SATURDAYS, SUNDAYS, AND HOLIDAYS PRIOR TO BEGINNING EACH EXCAVATION. THE CONTRACTOR IS RESPONSIBLE FOR NOTIFYING THE ADJOINING PROPERTY OWNER TO LOCATE PRIVATE UTILITIES THAT MAY BE PLACED NOT ONLY ON PRIVATE PROPERTY BUT ON PUBLIC PROPERTY.

TRAFFIC CONTROL NOTES:

- 1. ANY METHODS, STREET MARKINGS AND SIGNAGE NECESSARY FOR WARNING MOTORISTS, WARNING PEDESTRIANS OR DIVERTING TRAFFIC DURING CONSTRUCTION SHALL CONFORM TO THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS. LATEST EDITION.
- 2. ALL PAVEMENT MARKINGS, MARKERS, PAINT, TRAFFIC BUTTONS, TRAFFIC CONTROLS AND SIGNS SHALL BE INSTALLED IN ACCORDANCE WITH THE STATE OF WISCONSIN DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR FOR HIGHWAY AND STRUCTURE CONSTRUCTION, AND THE MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS, LATEST EDITIONS.
- 3. ALL PUBLIC STREETS THAT ARE TO BE CLOSED OR INTERRUPTED DUE TO THE CONSTRUCTION ACTIVITIES WILL REQUIRE ORDINATION WITH THE CITY OF GREEN BAY ENGINEERING DEPARTMENT FOR A PUBLIC SERVICE ANNOUNCEMENT. A MINIMUM OF 72 HOURS NOTICE WILL BE GIVEN TO THE CITY ENGINEERING DEPARTMENT FOR SAID CLOSURES OR INTERRUPTIONS.
- 4. PARKING RESTRICTIONS MUST BE POSTED 24 HOURS BEFORE WORK STARTS AND WILL BE AT THE EXPENSE OF THE CONTRACTOR. CONTACT THE POLICE DEPARTMENT AND PUBLIC WORKS DEPARTMENT WHEN RESTRICTIONS ARE PLACED.
- 5. THE HOURS OF CONSTRUCTION OPERATIONS WILL FOLLOW THE NOISE RESTRICTIONS AS BE PER THE CITY OF GREEN BAY NUISANCE CODE AND AS SPECIFIED IN THE CITY OF GREEN BAY STANDARD CONSTRUCTION SPECIFICATIONS.

EROSION AND SEDIMENTATION CONTROL NOTES:

- 1. EROSION CONTROL MEASURES. SITE WORK AND RESTORATION WORK SHALL BE IN ACCORDANCE WITH THE WISCONSIN DEPARTMENT OF NATURAL RESOURCES ENVIRONMENTAL PROTECTION BEST MANAGEMENT PRACTICES
- 2. ALL SLOPES SHALL BE SODDED OR SEEDED PER LANDSCAPE PLAN WITH APPROVED GRASS, GRASS MIXTURES OR GROUND COVER SUITABLE TO THE AREA AND SEASON IN WHICH THEY ARE APPLIED
- 3. SILT FENCES, ROCK BERMS, SEDIMENTATION BASINS AND SIMILARLY RECOGNIZED TECHNIQUES AND MATERIALS SHALL BE EMPLOYED DURING CONSTRUCTION TO PREVENT POINT SOURCE SEDIMENTATION LOADING OF DOWNSTREAM FACILITIES. SUCH INSTALLATION SHALL BE REGULARLY INSPECTED BY THE CONTRACTORS CERTIFIED STORM WATER OPERATOR FOR EFFECTIVENESS. ADDITIONAL MEASURES MAY BE REQUIRED IF, IN THE OPINION OF THE CITY OF GREEN BAY'S HYDROLOGY ENGINEER OR FIELD REPRESENTATIVE. THEY ARE WARRANTED.
- 4. ALL MUD, DIRT, ROCKS, DEBRIS, ETC., SPILLED, TRACKED OR OTHERWISE DEPOSITED ON EXISTING PAVED STREETS, DRIVES AND AREAS USED BY THE PUBLIC SHALL BE CLEANED UP IMMEDIATELY.

STREET AND DRAINAGE NOTES:

- 1. ALL FIELD TESTING SHALL BE DONE BY AN INDEPENDENT LABORATORY AT THE OWNER'S EXPENSE. ANY RETESTING SHALL BE PAID FOR BY THE CONTRACTOR. A CITY INSPECTOR SHALL BE PRESENT DURING ALL TESTS OF ITEMS TO BE INCORPORATED INTO THE CITY UTILITY SYSTEMS. TESTING SHALL BE COORDINATED WITH THE CITY'S INSPECTOR AND HE/SHE SHALL BE GIVEN A MINIMUM OF 24 HOURS NOTICE PRIOR TO ANY TESTING.
- 2. DEPTH OF COVER FOR ALL CROSSINGS UNDER PAVEMENT FOR GAS, ELECTRIC, TELEPHONE, AND CABLE TV, SHALL BE A MINIMUM OF 30".
- 3. STREET RIGHTS-OF-WAY SHALL BE GRADED AT A SLOPE TO PROVIDE POSITIVE DRAINAGE TOWARD THE CURB UNLESS OTHERWISE INDICATED DUE TO SPECIAL CIRCUMSTANCES.



BROWN COUNTY PORT & RESOURCE **RECOVERY** GREEN BAY, WI

> RT OPMEN OOPE

RE(AY

~

0

P.E. No.:

Ш


Approved: MJVGMM Checked. INR Drawn: Designed: GEI Project 2201593 Attention: If this scale bar does not measure 1' then drawing is not original scale.


A 10/22/2025 FOR BID NO. DATE ISSUE/REVISION AP SHEET NAME


GENERAL NOTES


SHEET NO. G-110


BD

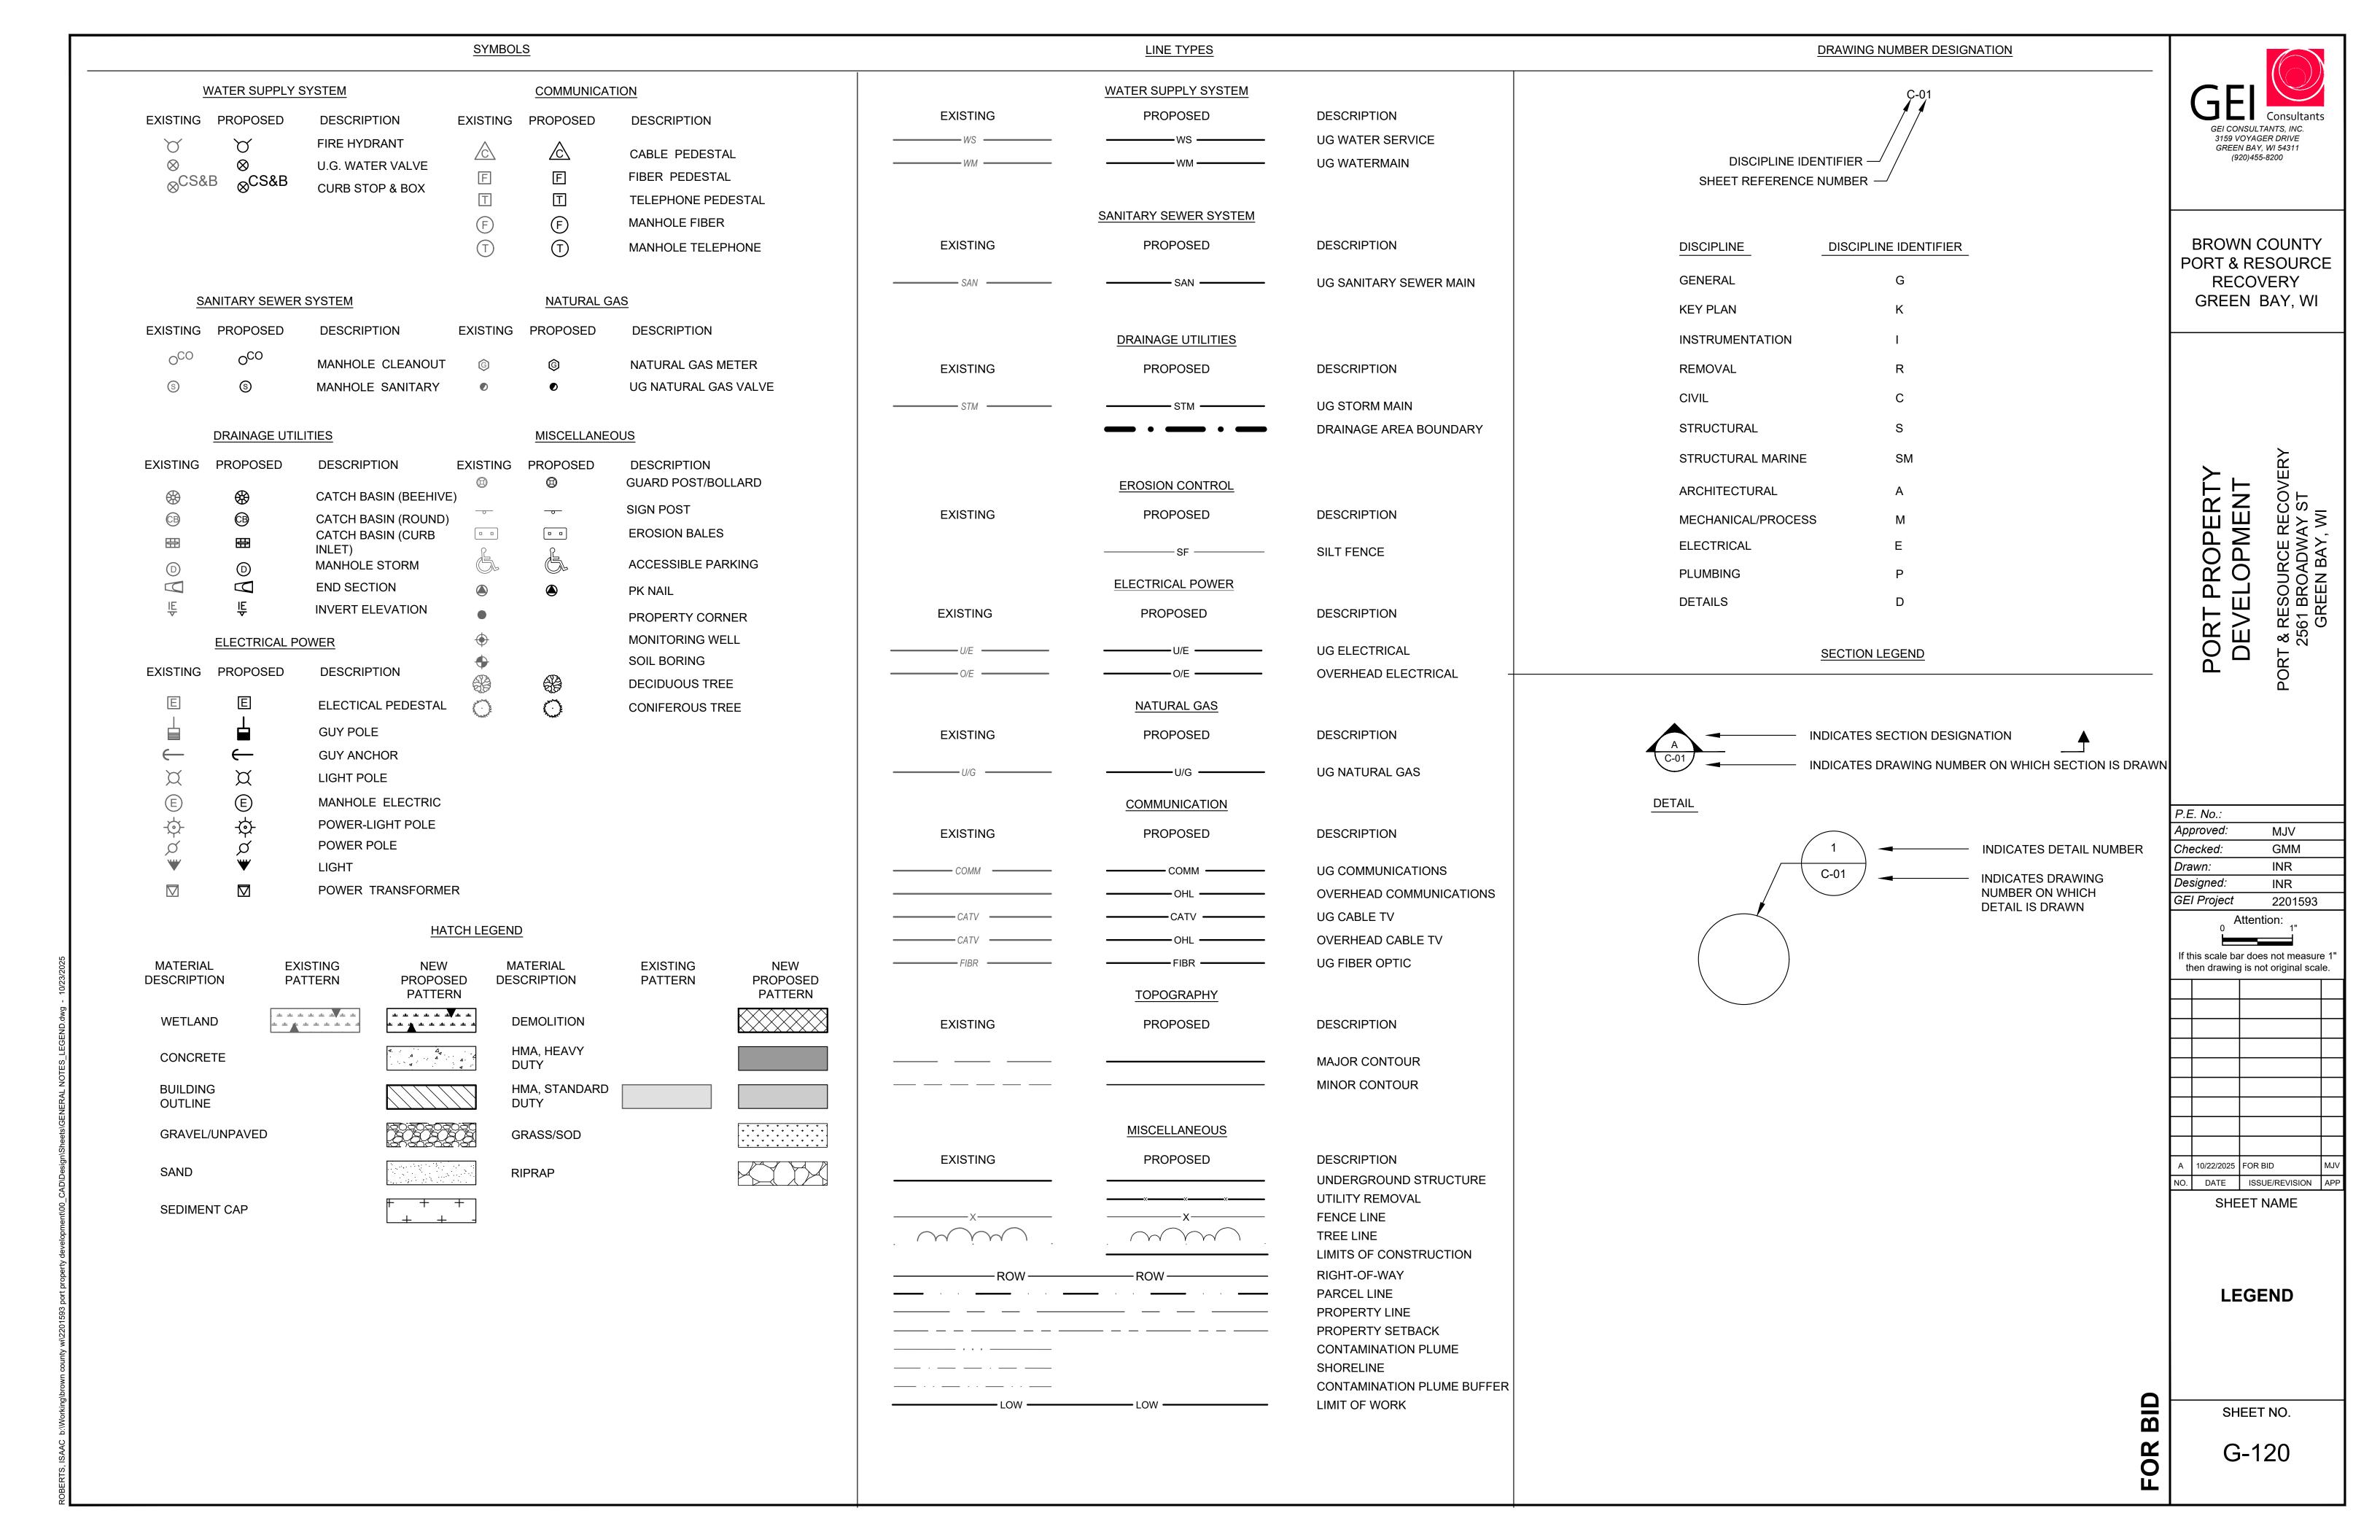


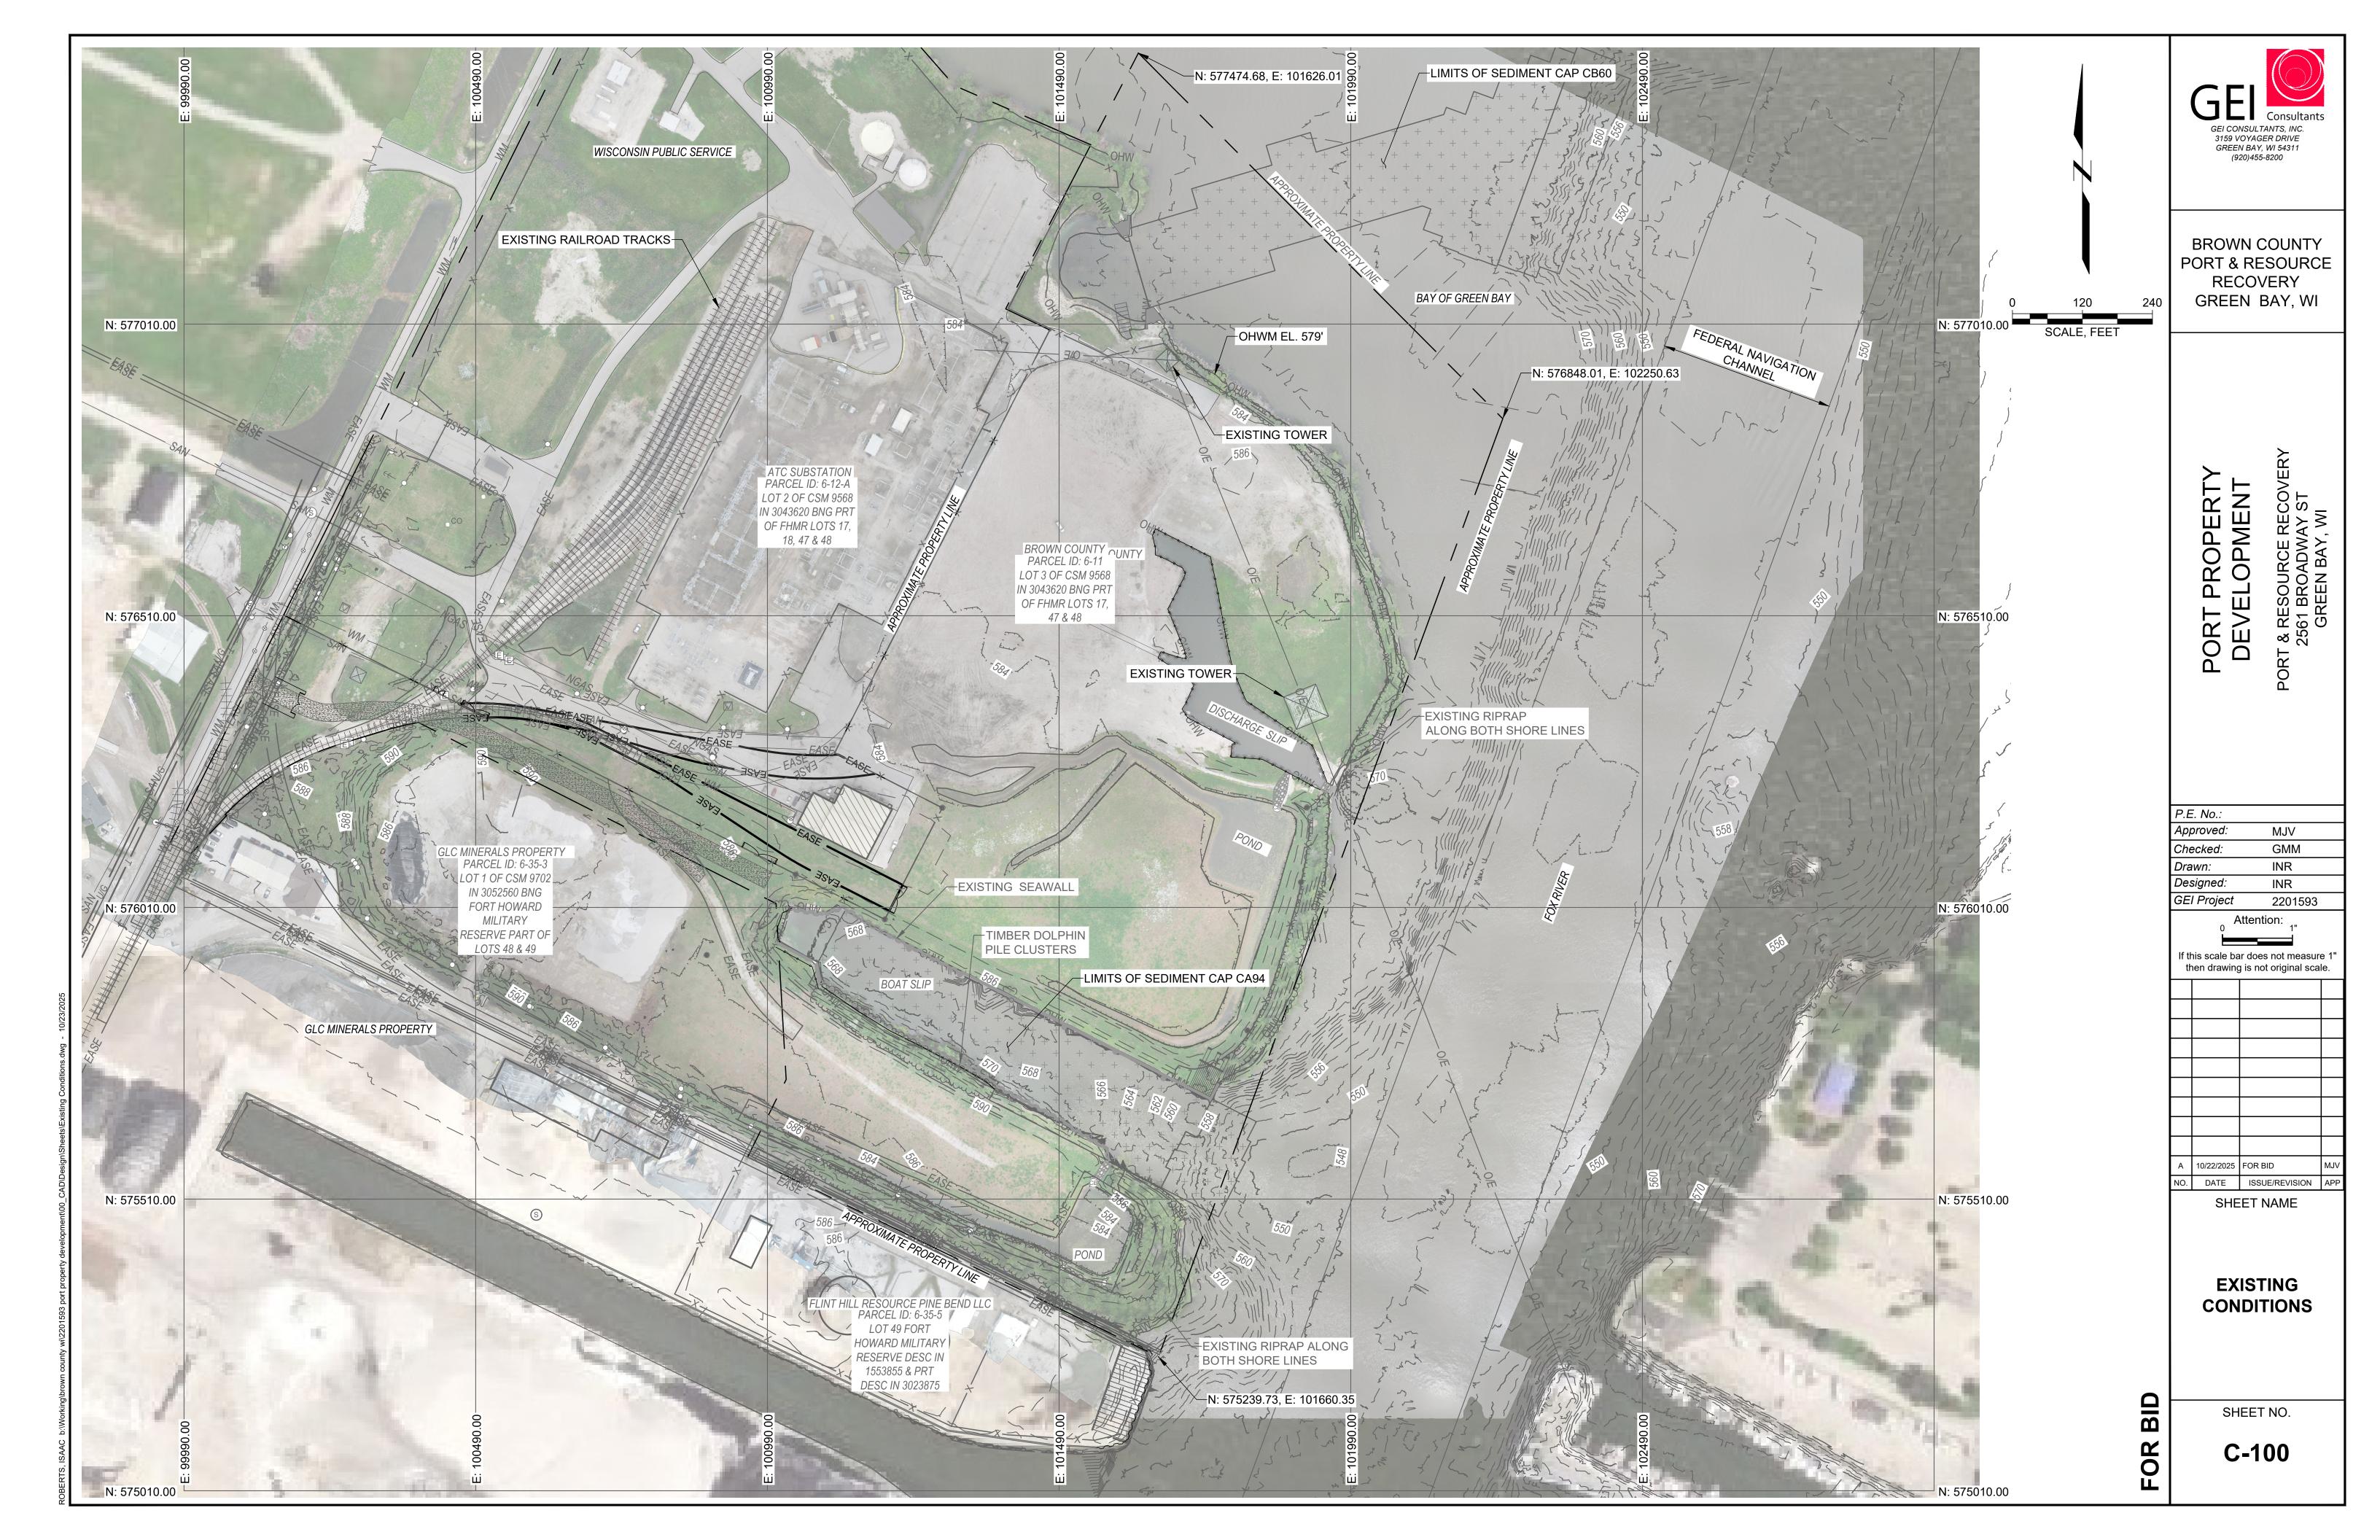

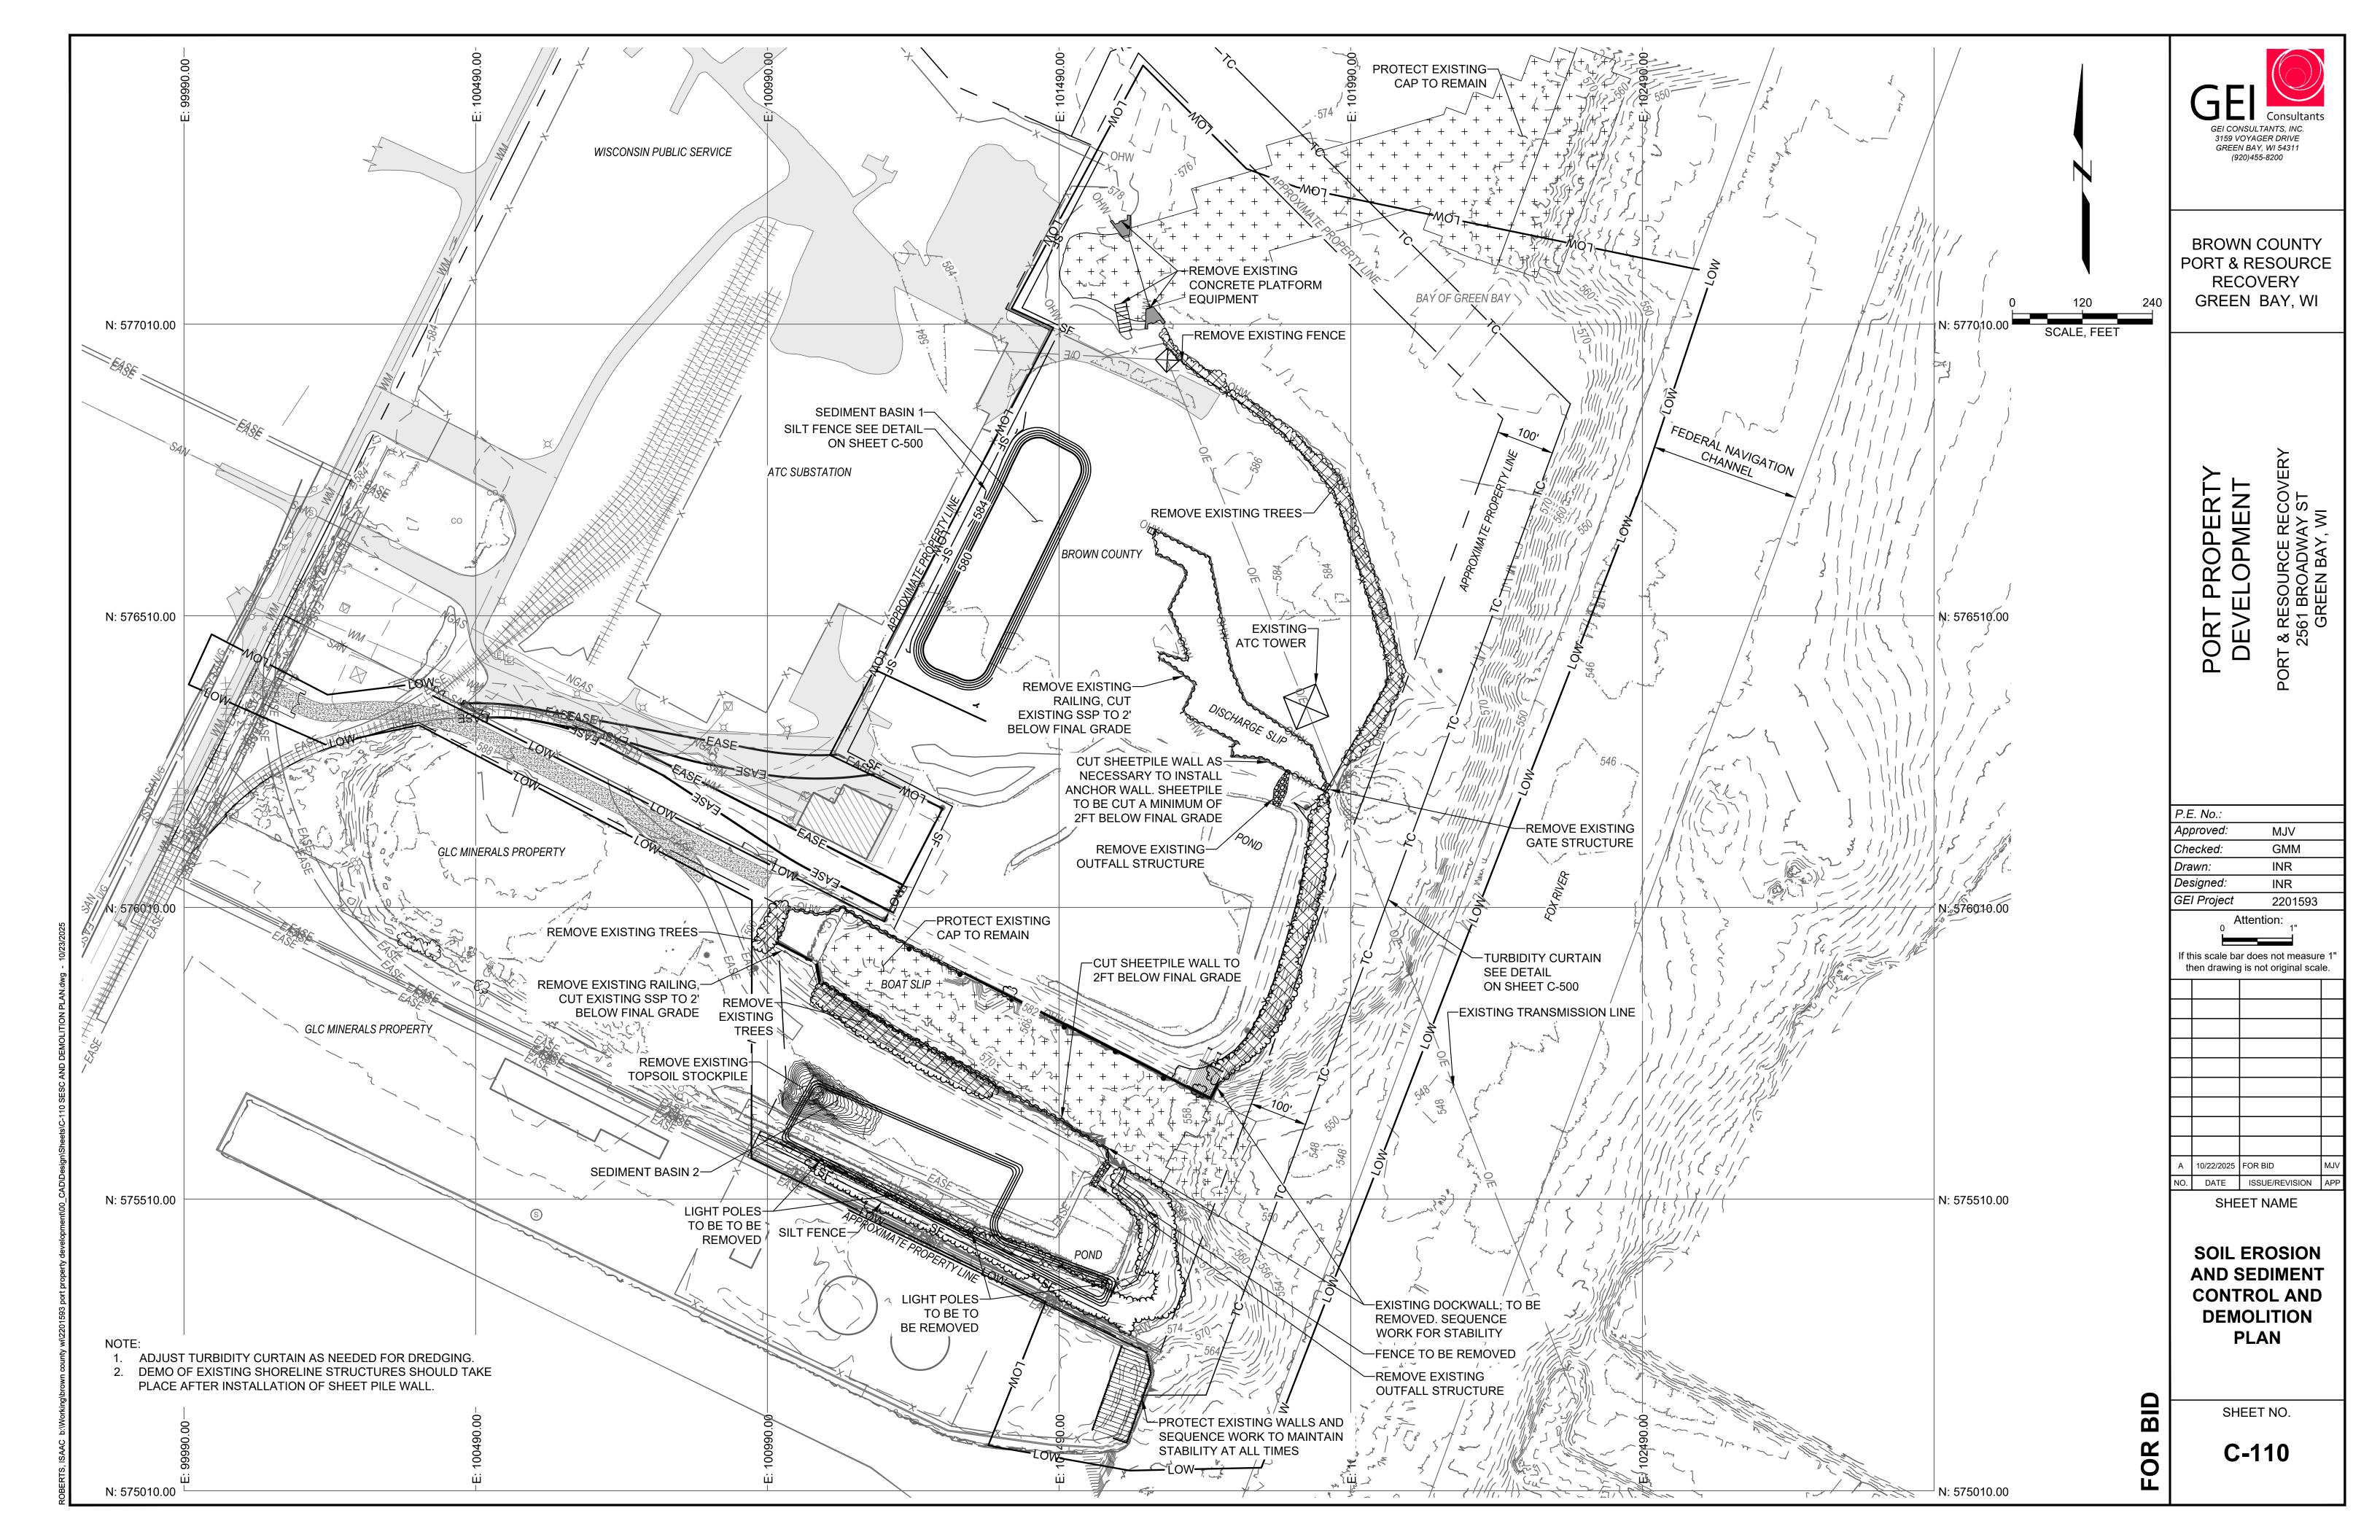

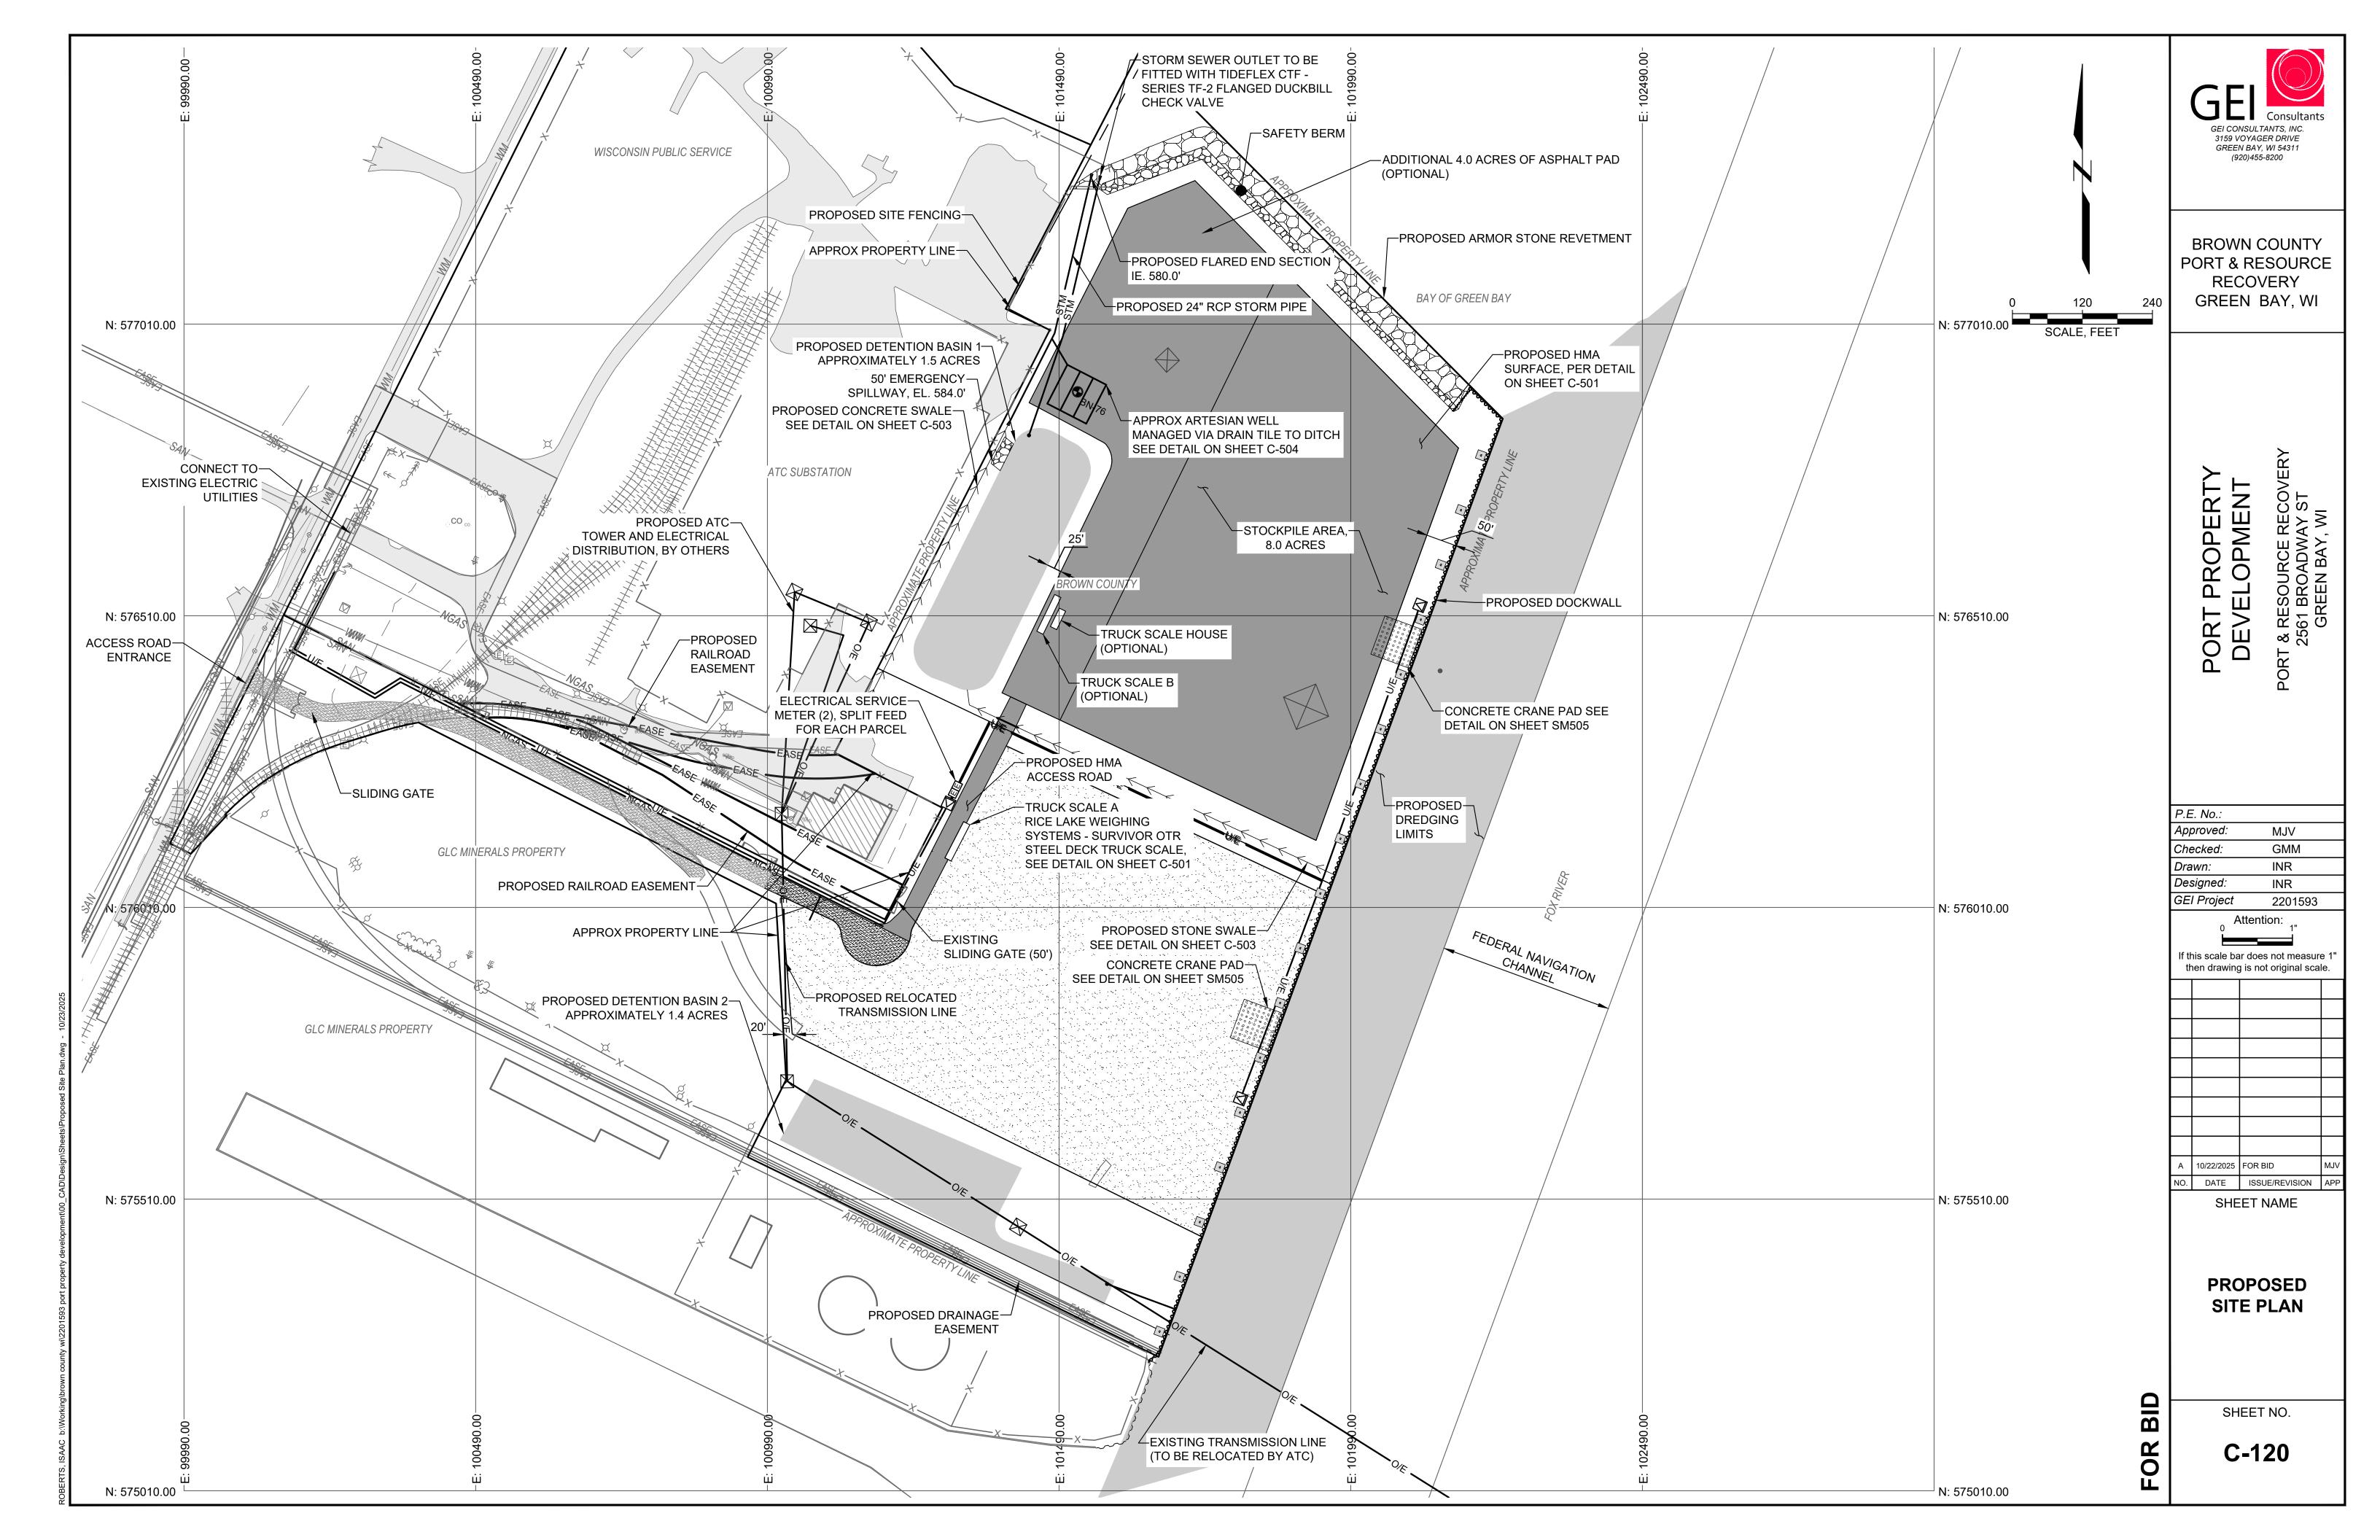

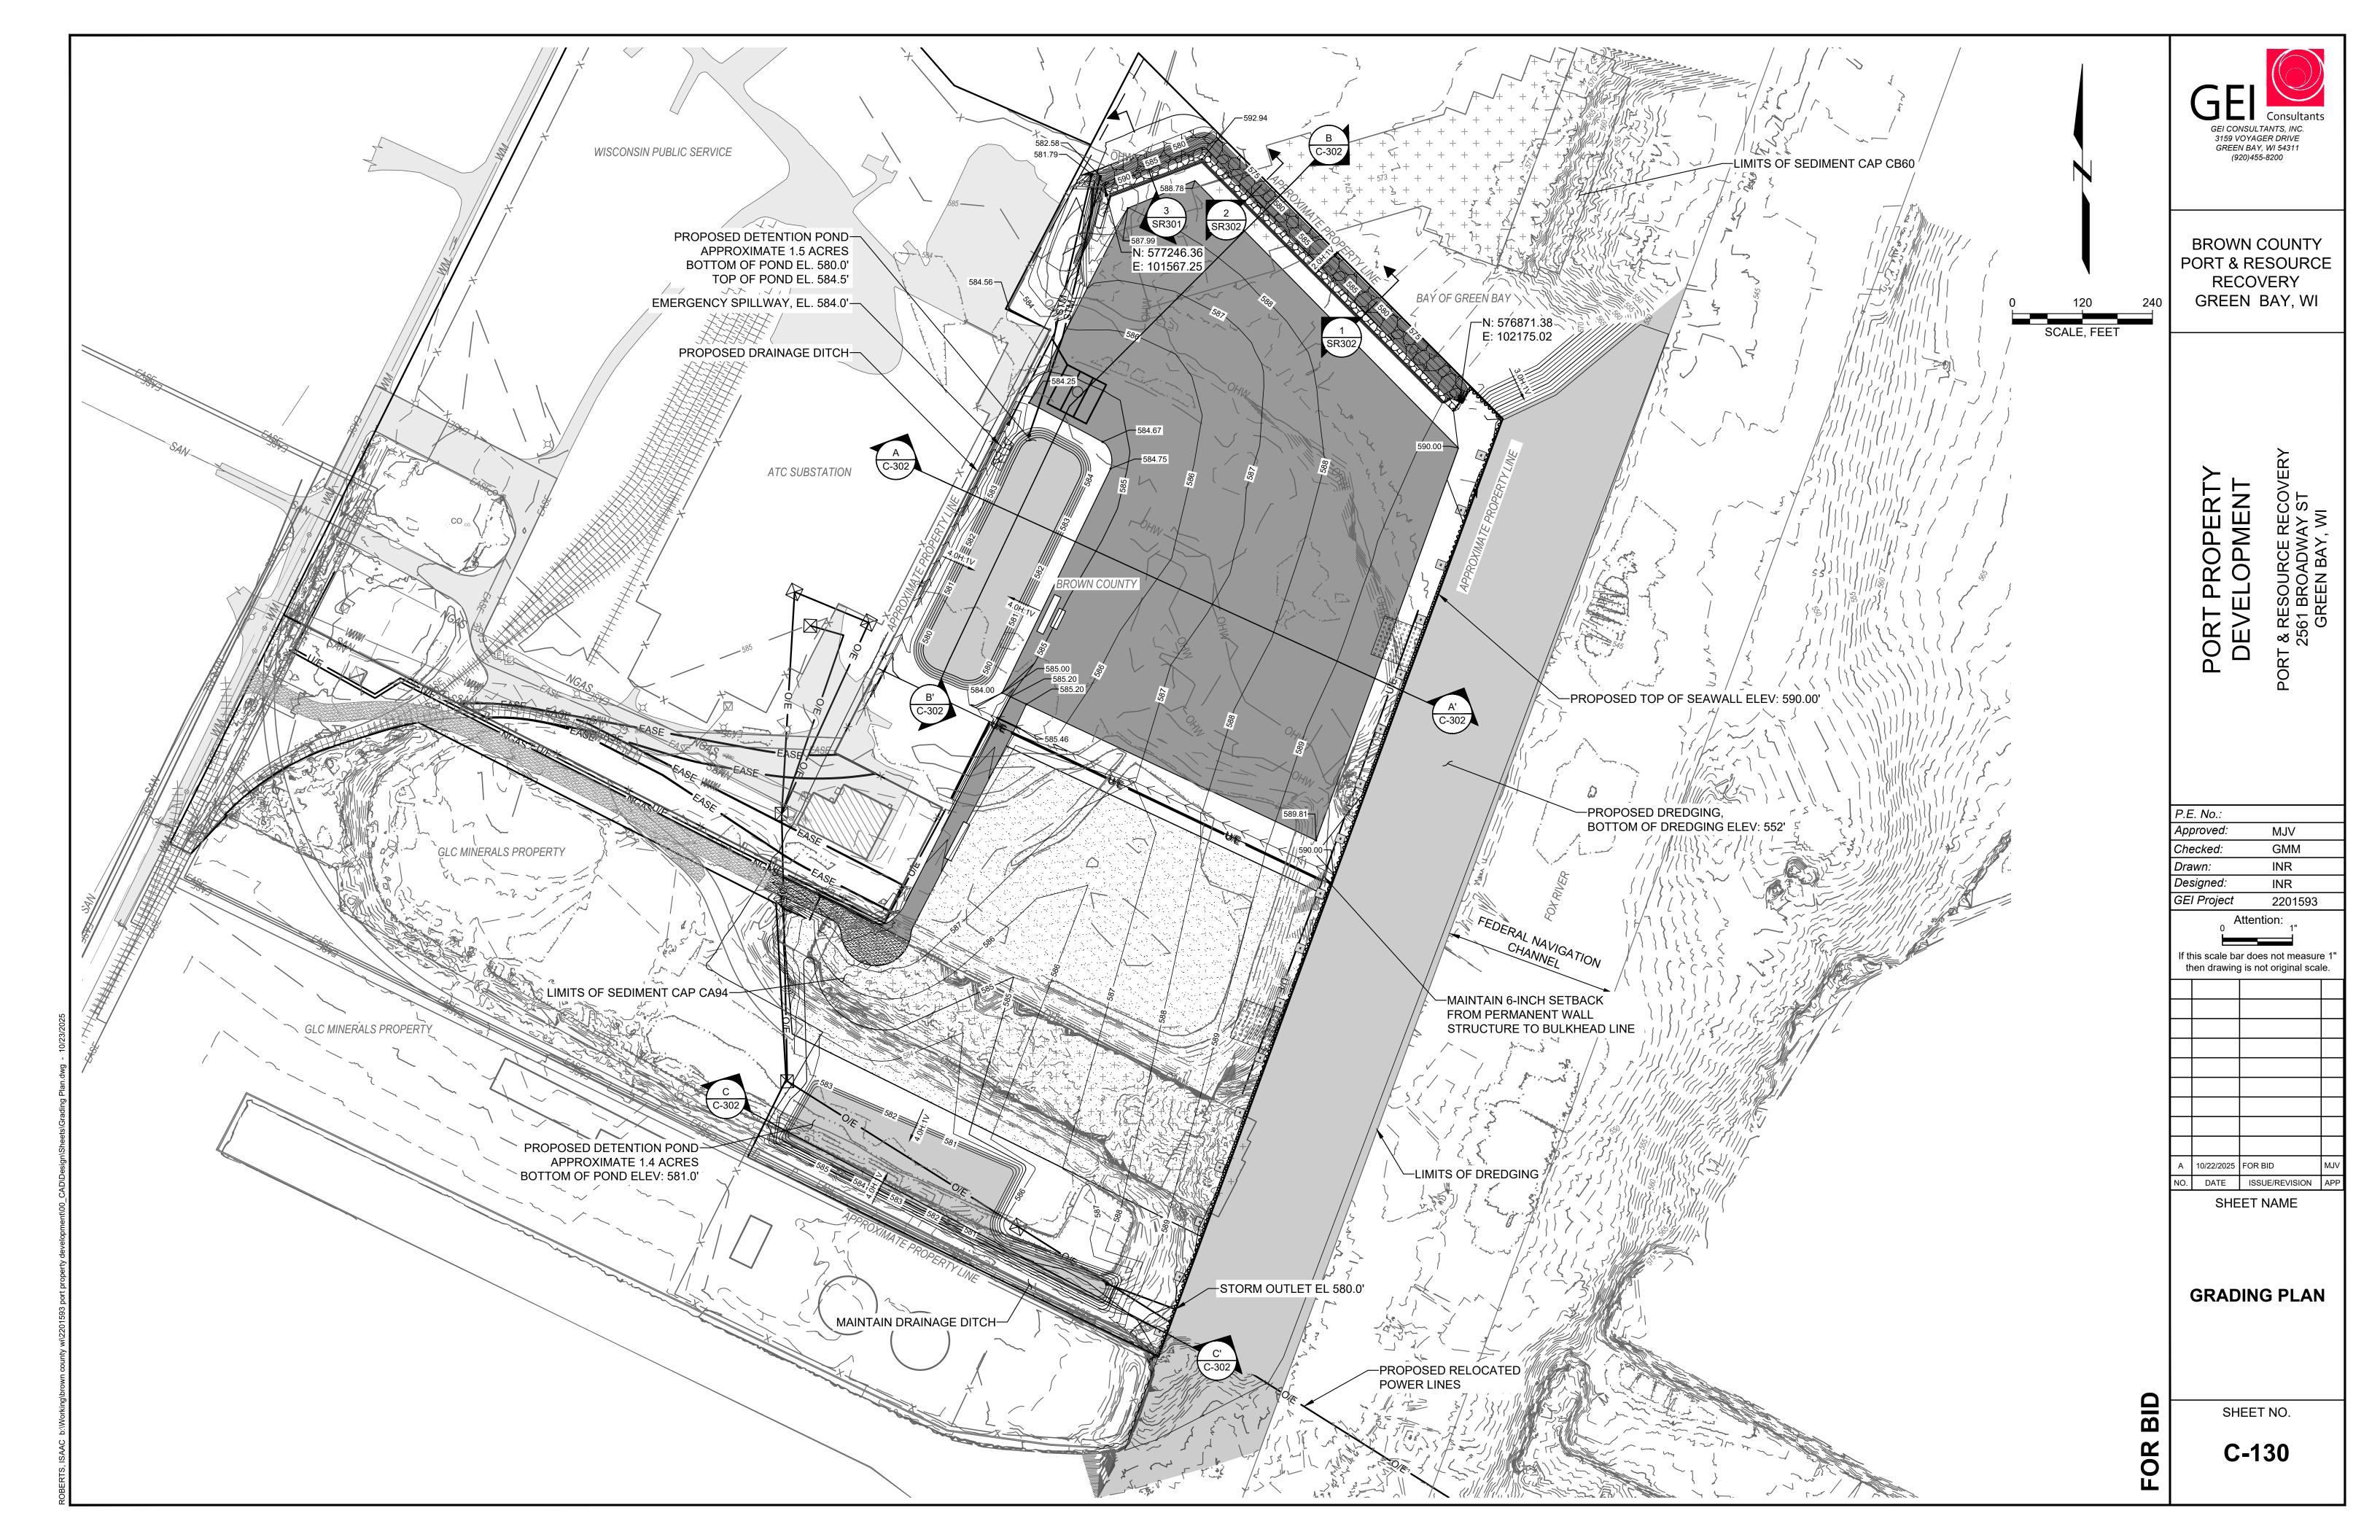

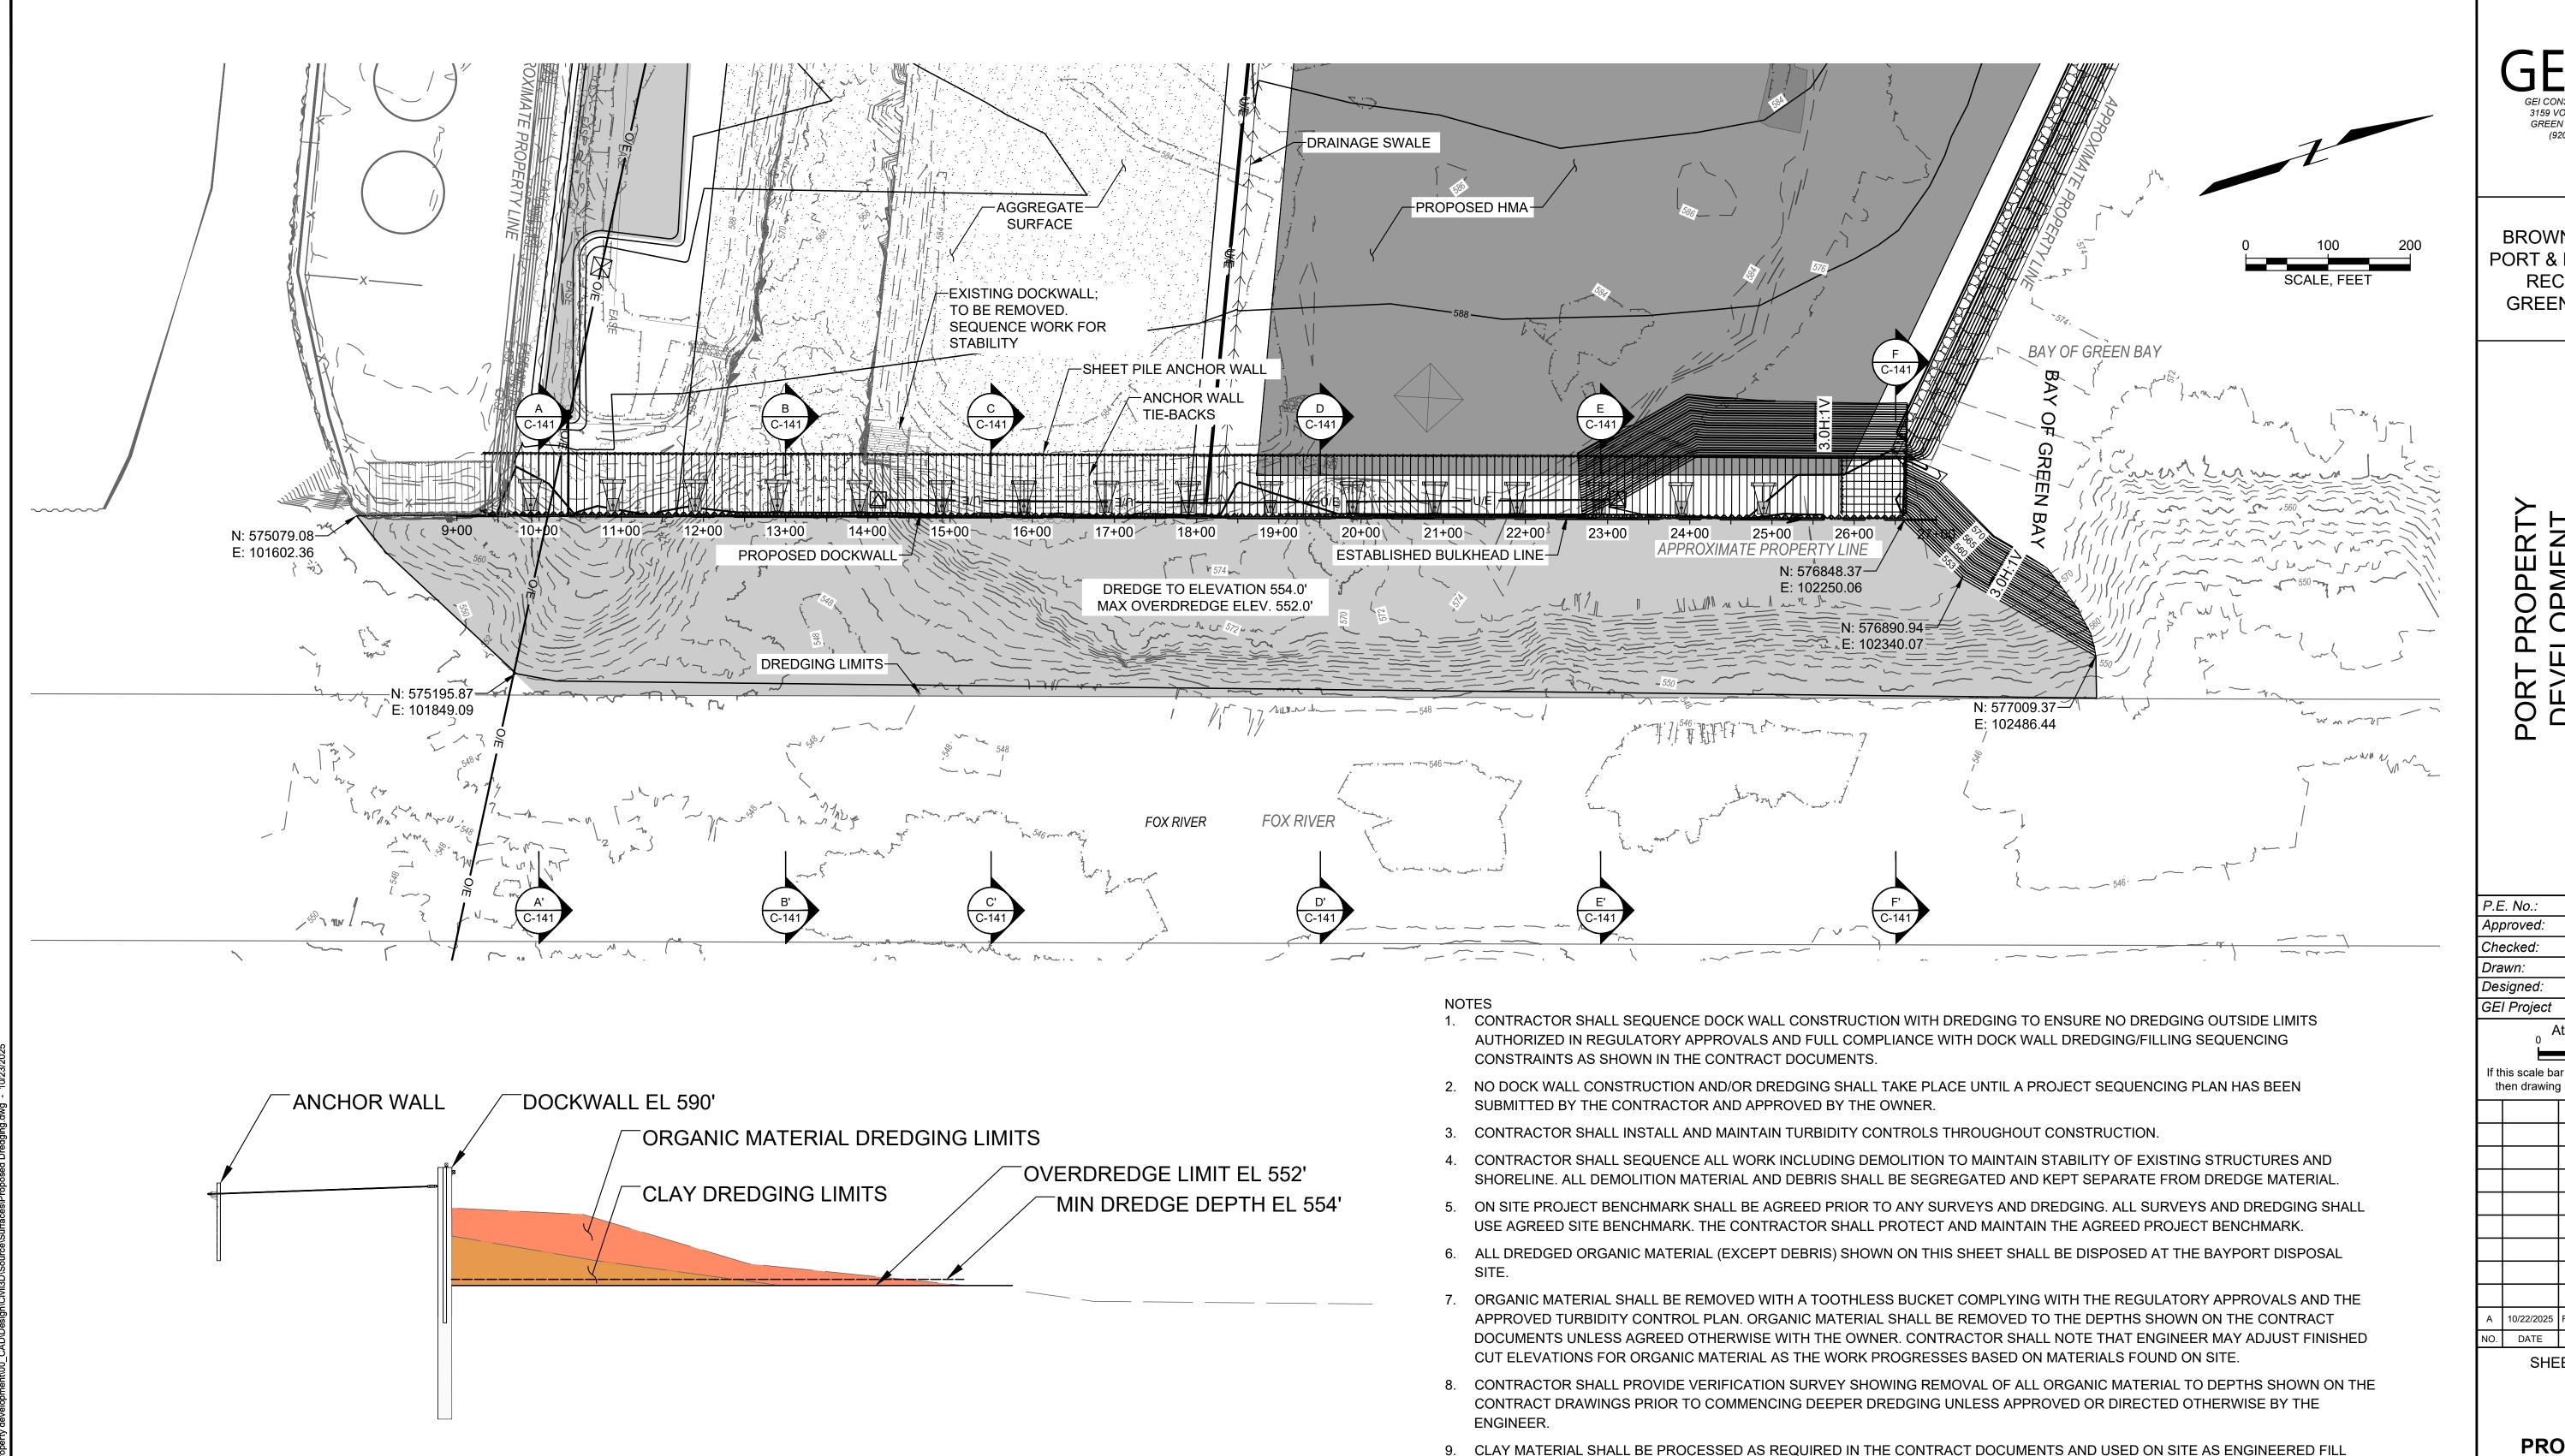

TYPICAL SECTION

NO SCALE

DREDGING QUANTITIES

101,530 CYDS CLAY

214,910 CYDS TOTAL EXCAVATION/CUT

113,380 CYDS ORGANIC MATERIAL

3159 VOYAGER DRIVE GREEN BAY, WI 54311

BROWN COUNTY PORT & RESOURCE RECOVERY GREEN BAY, WI

GMM 2201593

Attention:

If this scale bar does not measure 1 then drawing is not original scale.

A 10/22/2025 FOR BID NO. DATE ISSUE/REVISION APP

SHEET NAME

PROPOSED DREDGING PLAN

SHEET NO.

BID

C-140

11. ALL DEBRIS SHALL BE SEGREGATED FOR DISPOSAL IN ACCORDANCE WITH THE CONTRACT DOCUMENTS.


DEPTH SHALL BE 2' ABOVE THE PAYMENT LIMITS AT EL. 554'.


12. CONTRACTOR SHALL AVOID ANY IMPACTS ON NAVIGATION.


UNLESS APPROVED OTHERWISE BY THE OWNER.


- 13. CONTRACTOR SHALL PROTECT THE EXISTING WHARF STRUCTURES AND ALL ANCILLARY STRUCTURES FROM DAMAGE DURING THE PROJECT. ANY DAMAGE SHALL BE REPAIRED AT NO ADDITIONAL COST TO THE AUTHORITY.
- 14. CONTRACTOR SHALL TAKE SPECIAL CARE TO AVOID OVERDREDGE BELOW THE PAYMENT LIMITS CLOSE TO THE DOCK WALL. THE OWNER MAY REQUIRE THE CONTRACTOR TO FILL OVERDREDGE BELOW THE PAYMENT LIMITS WITHIN 40 FEET OF THE FACE OF THE DOCK WALL WITH CRUSHED STONE AT NO ADDITIONAL COST TO THE OWNER.


10. CONTRACTOR SHALL NOTE THAT THE PAYMENT LIMIT IS EL 552' AS SHOWN ON THE CONTRACT DOCUMENTS. MINIMUM SHOALING

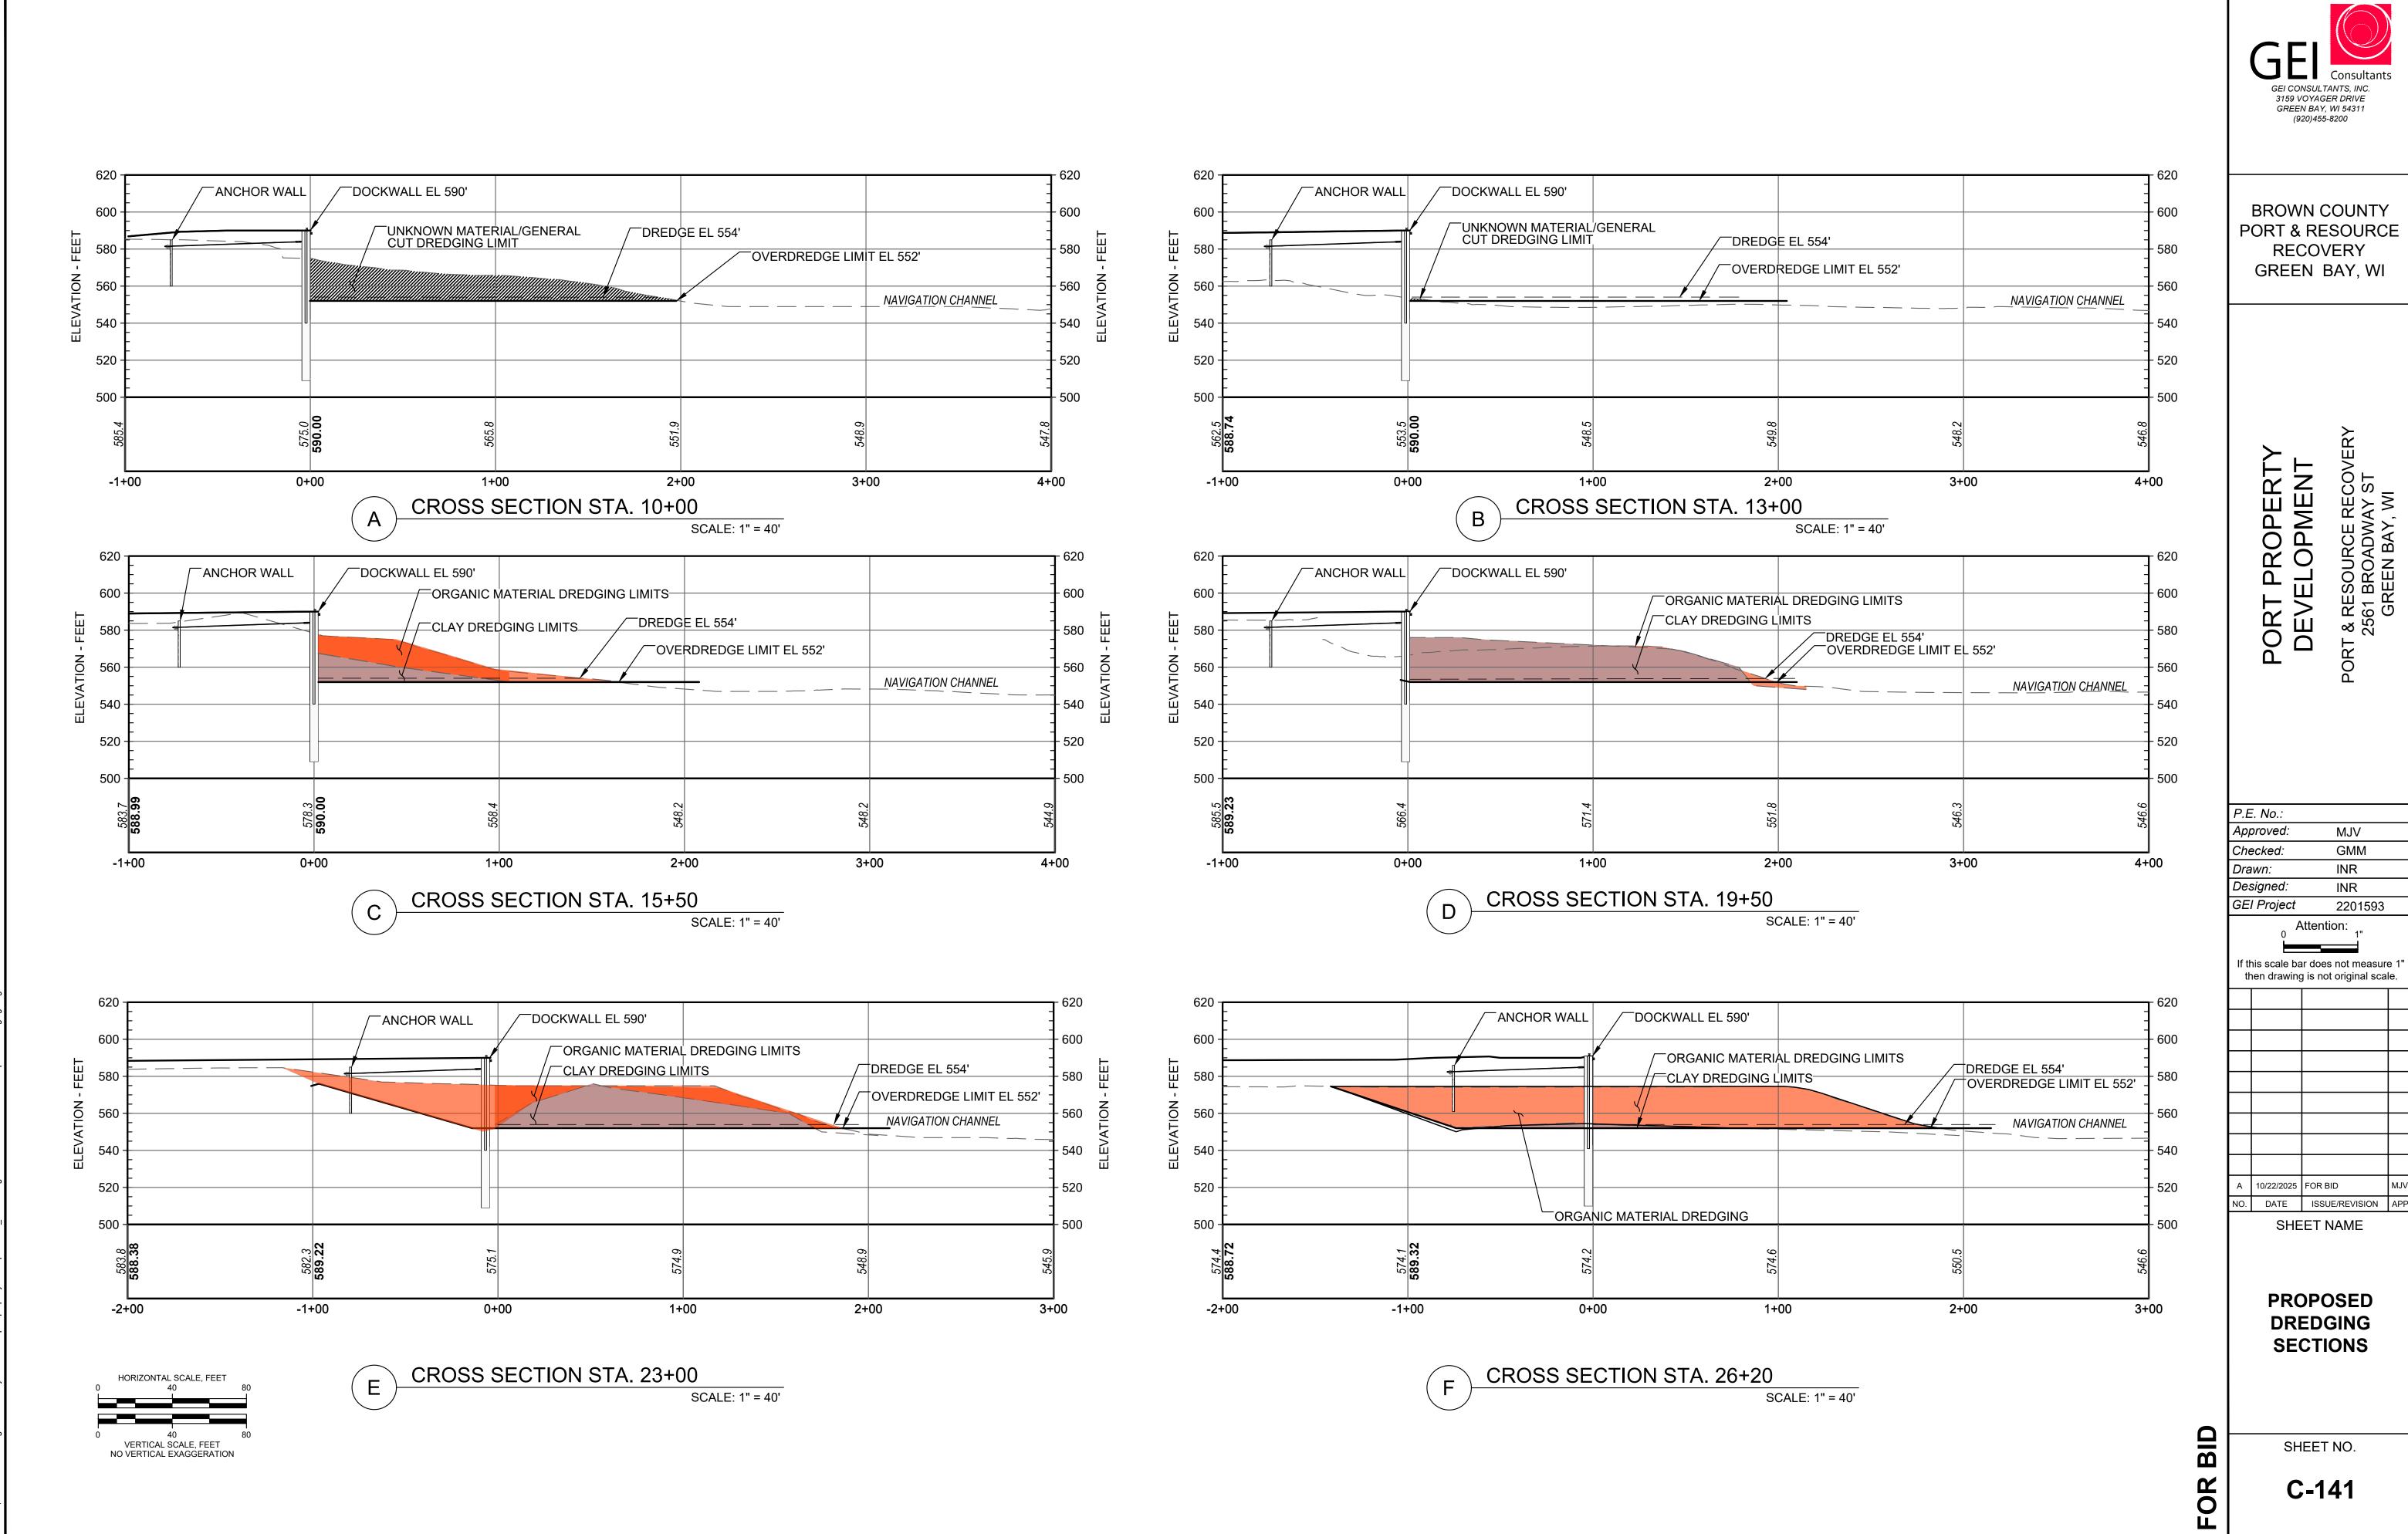

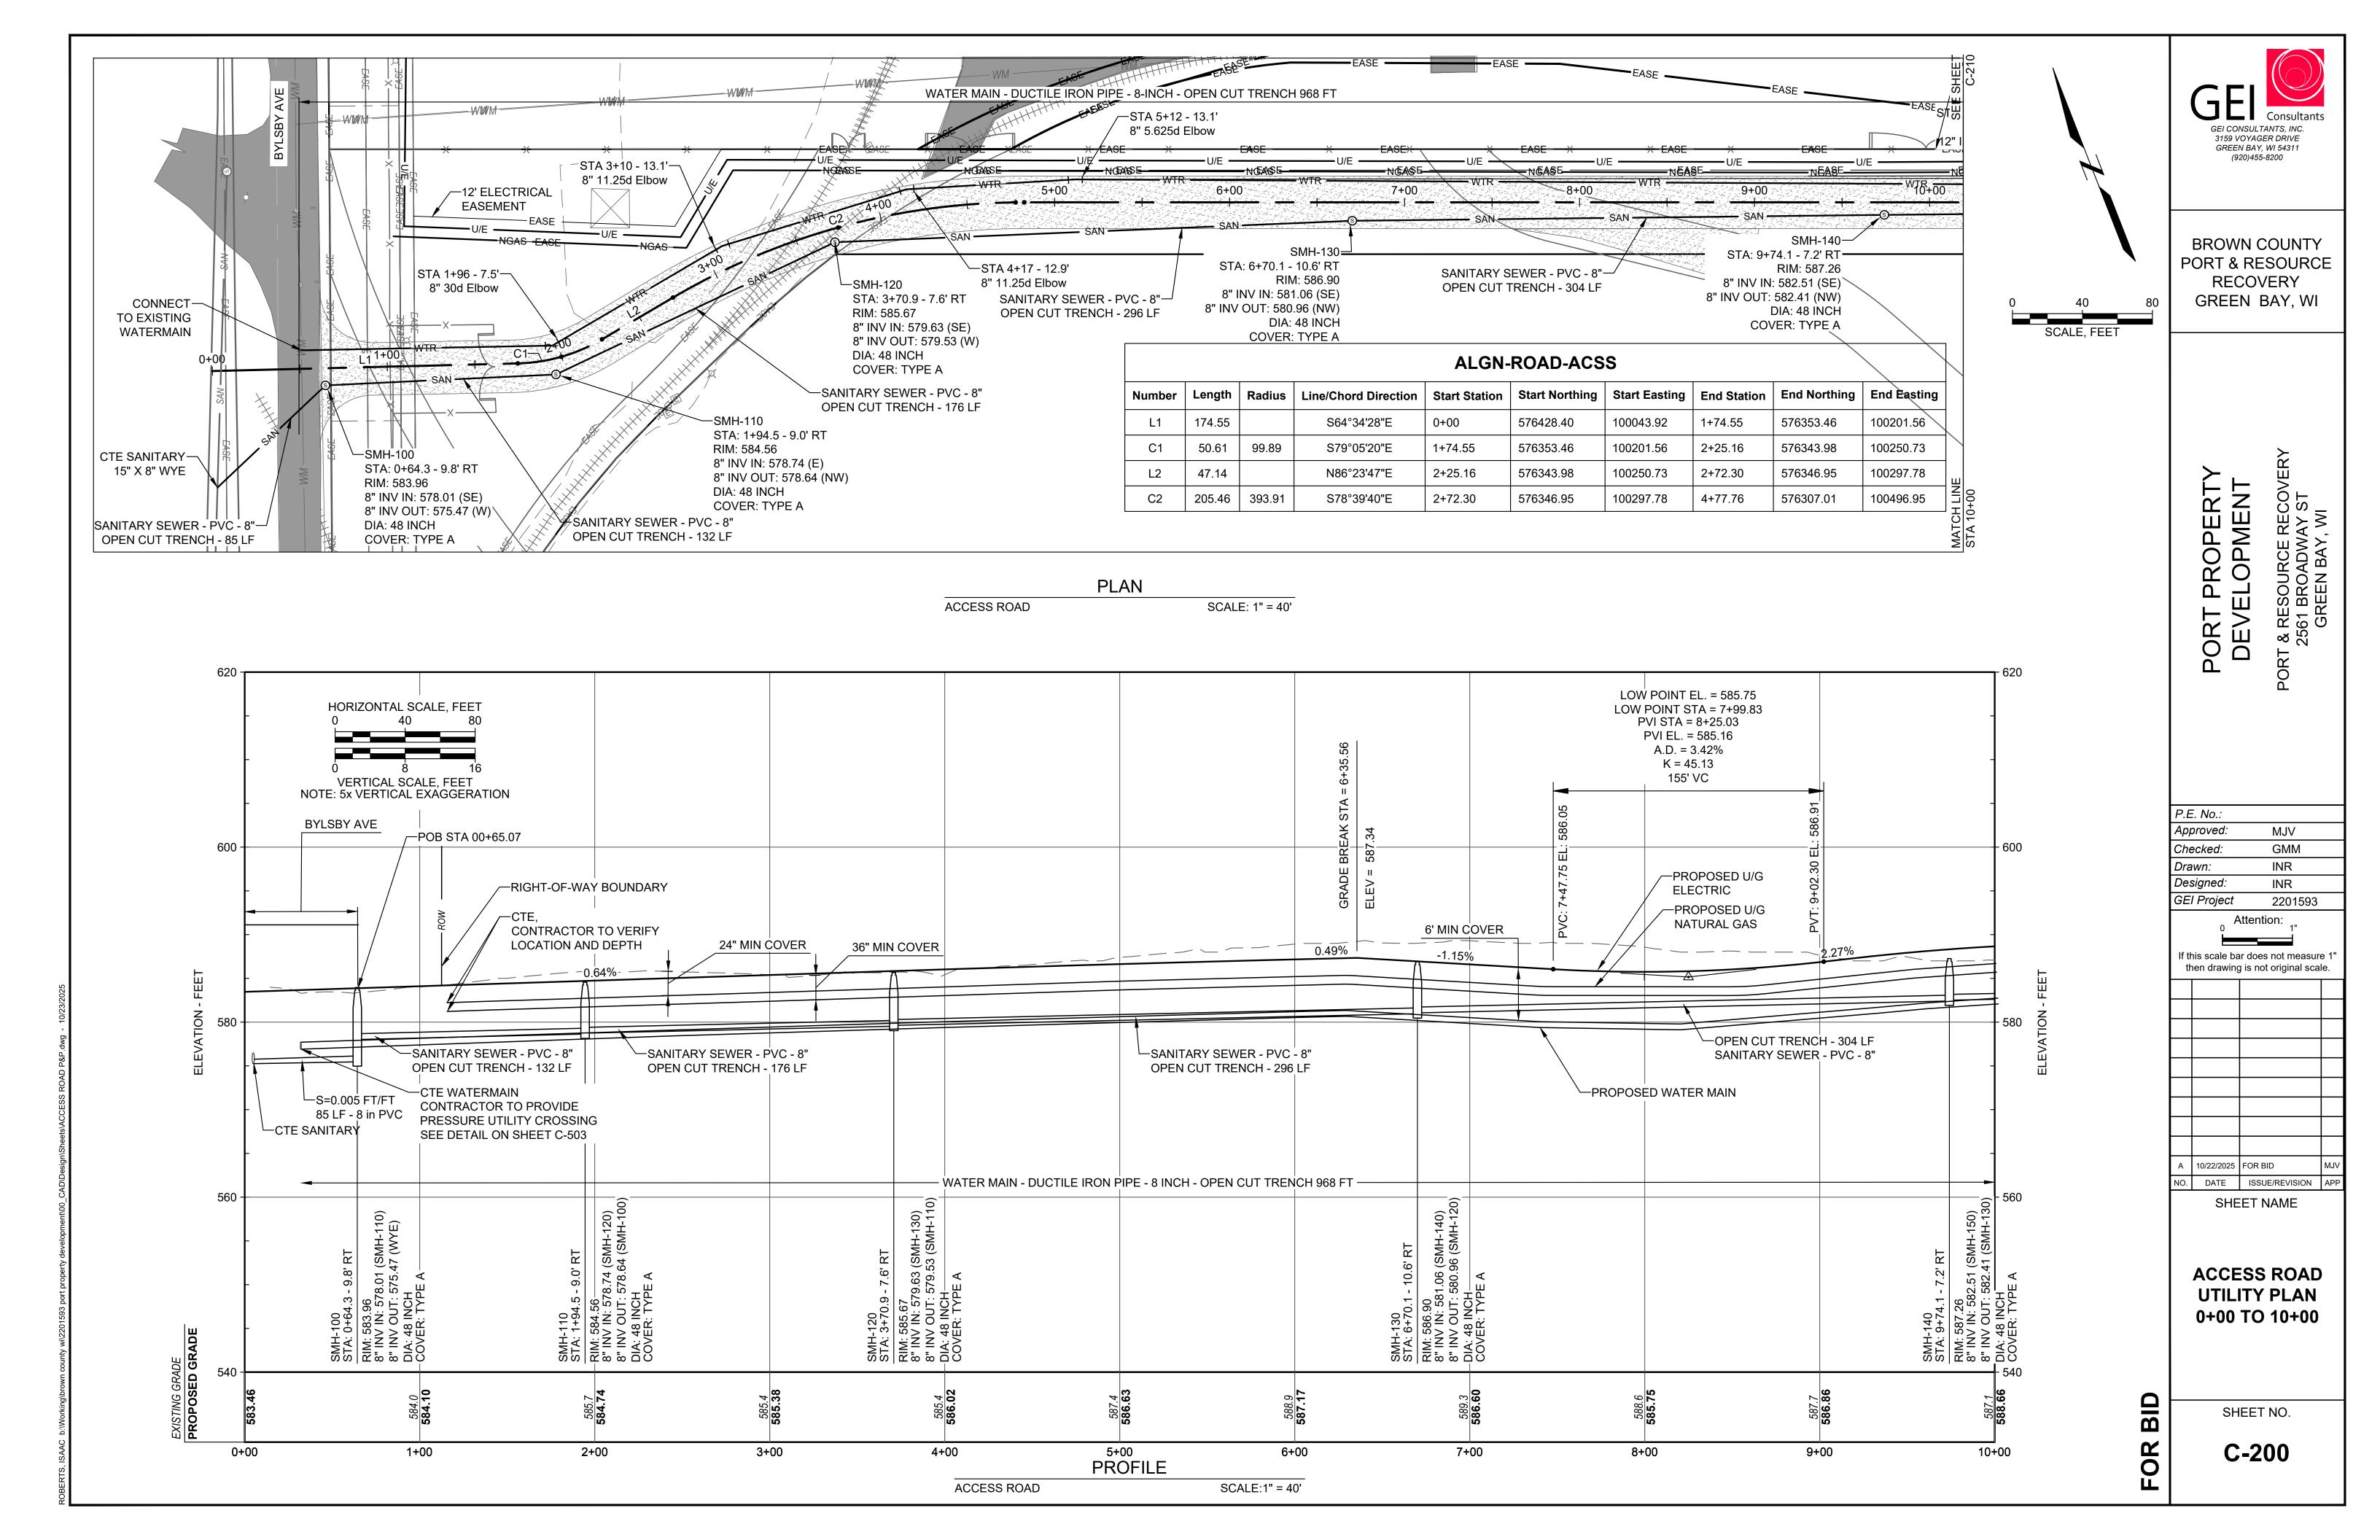

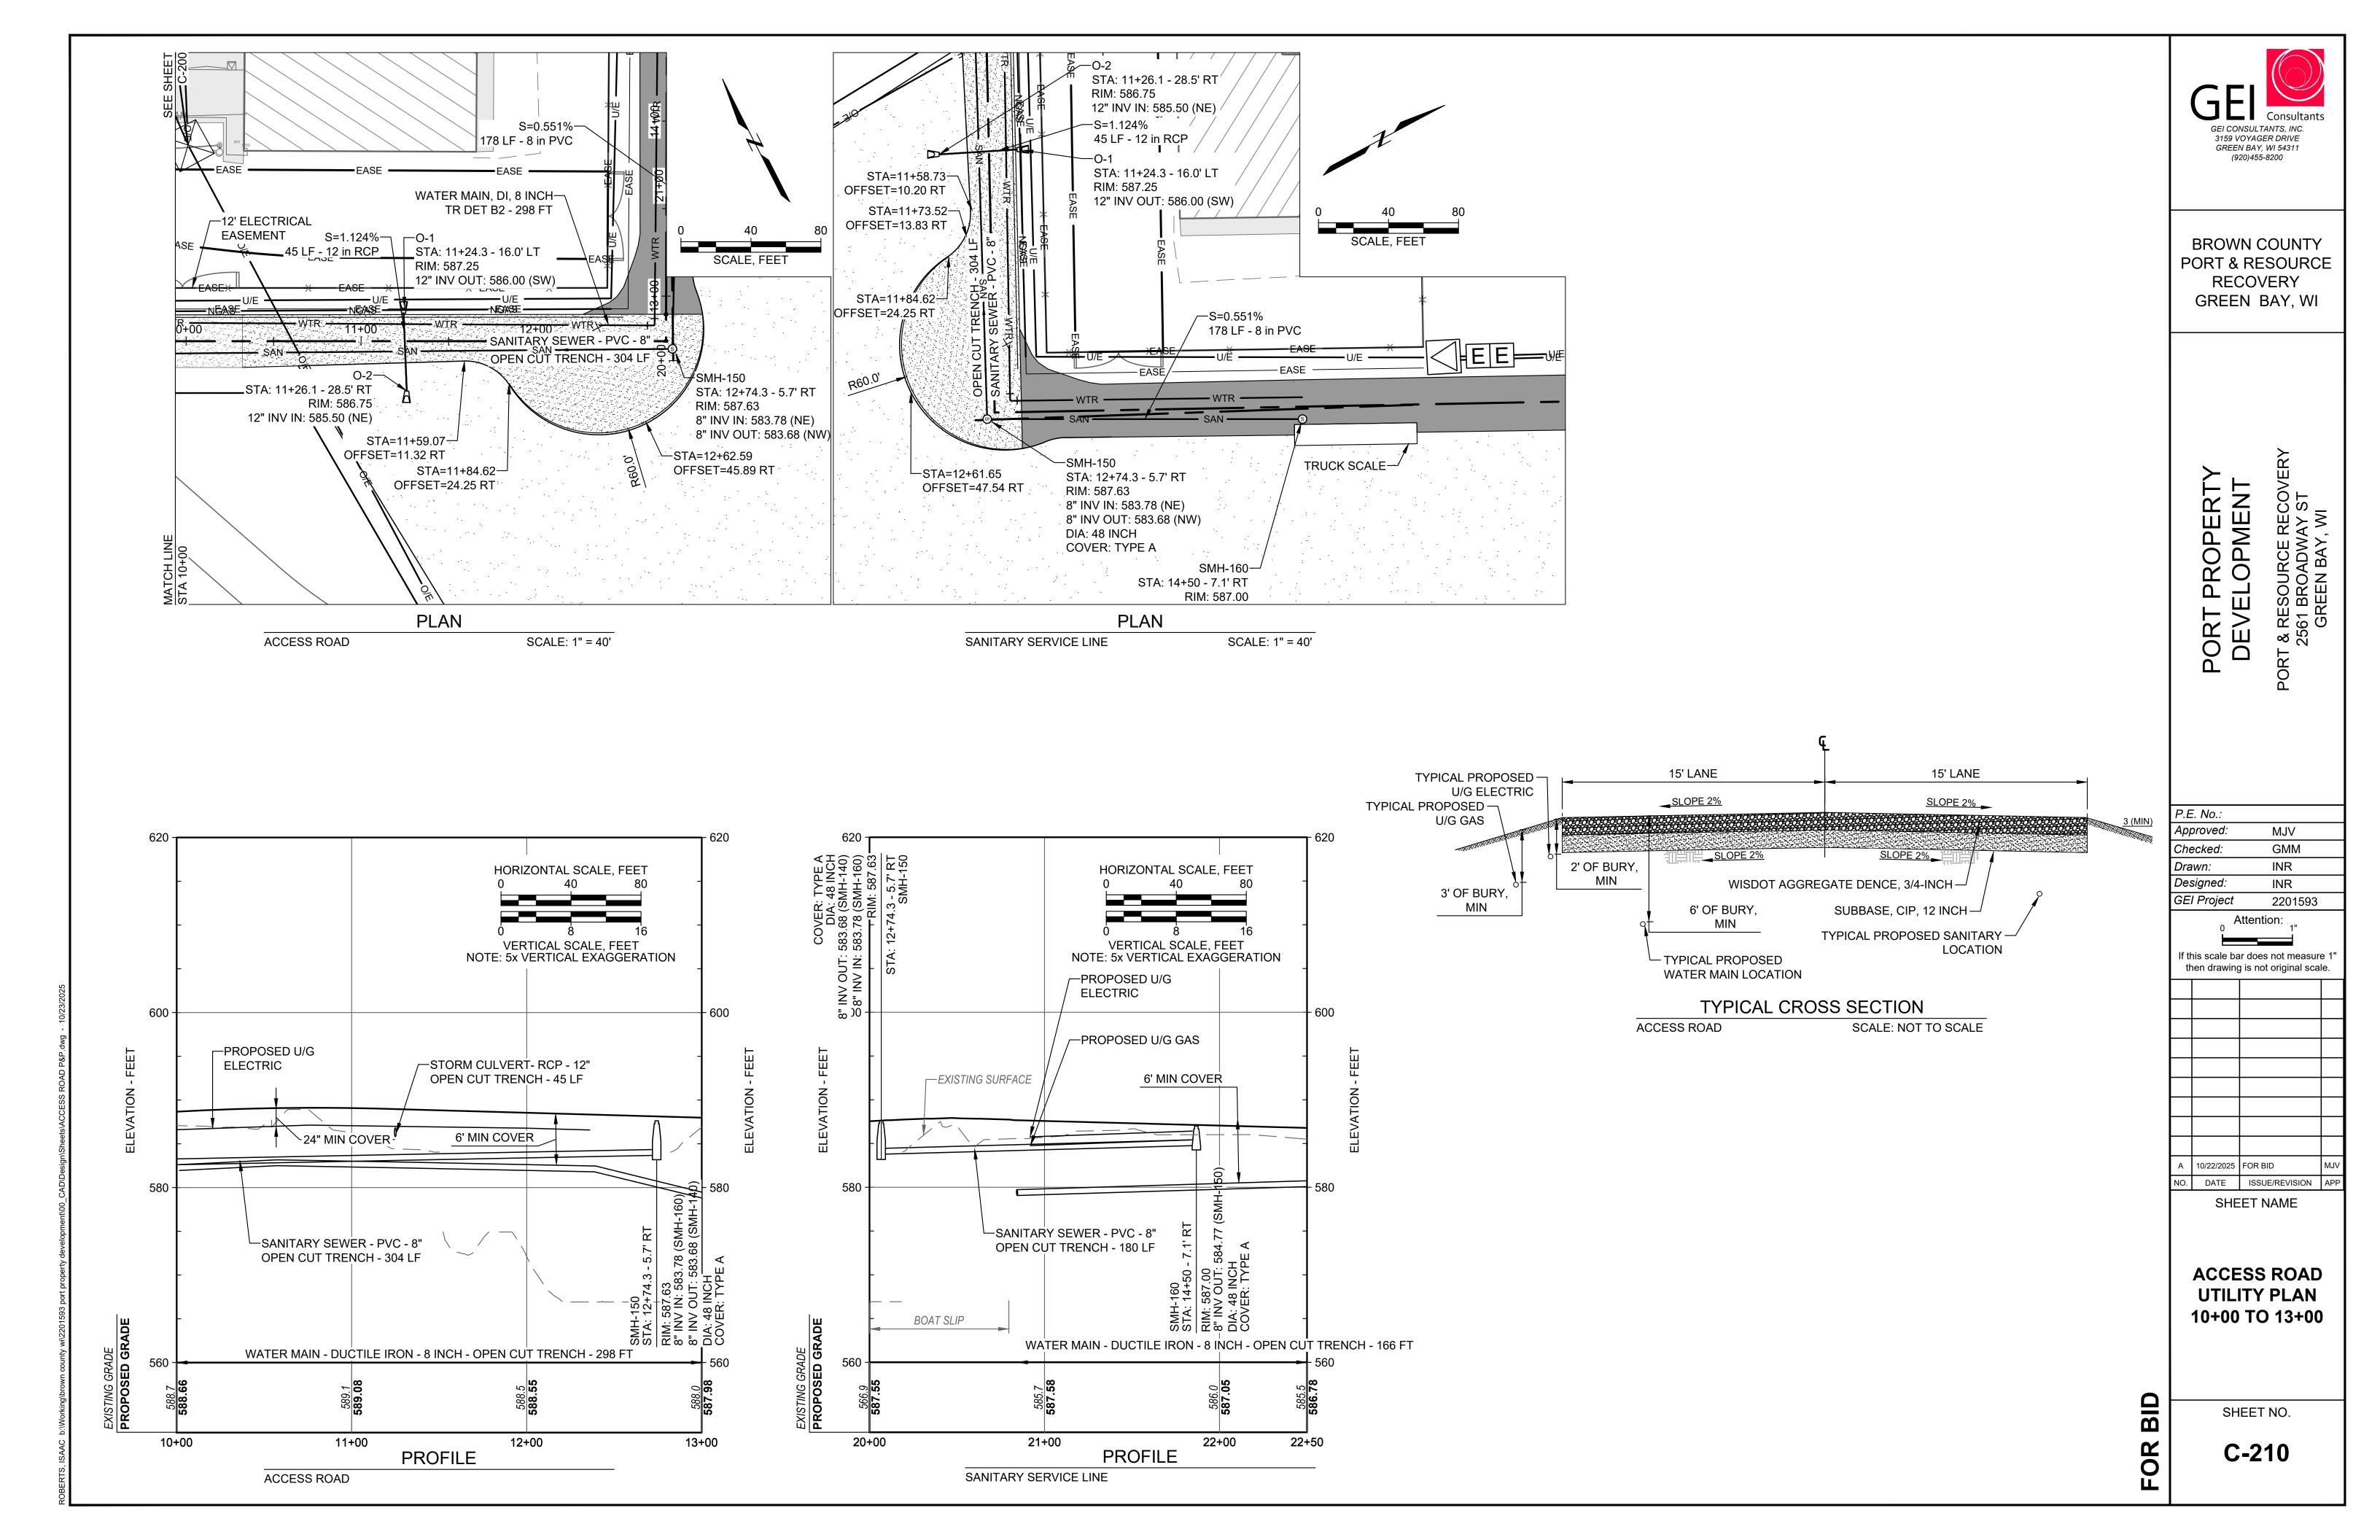


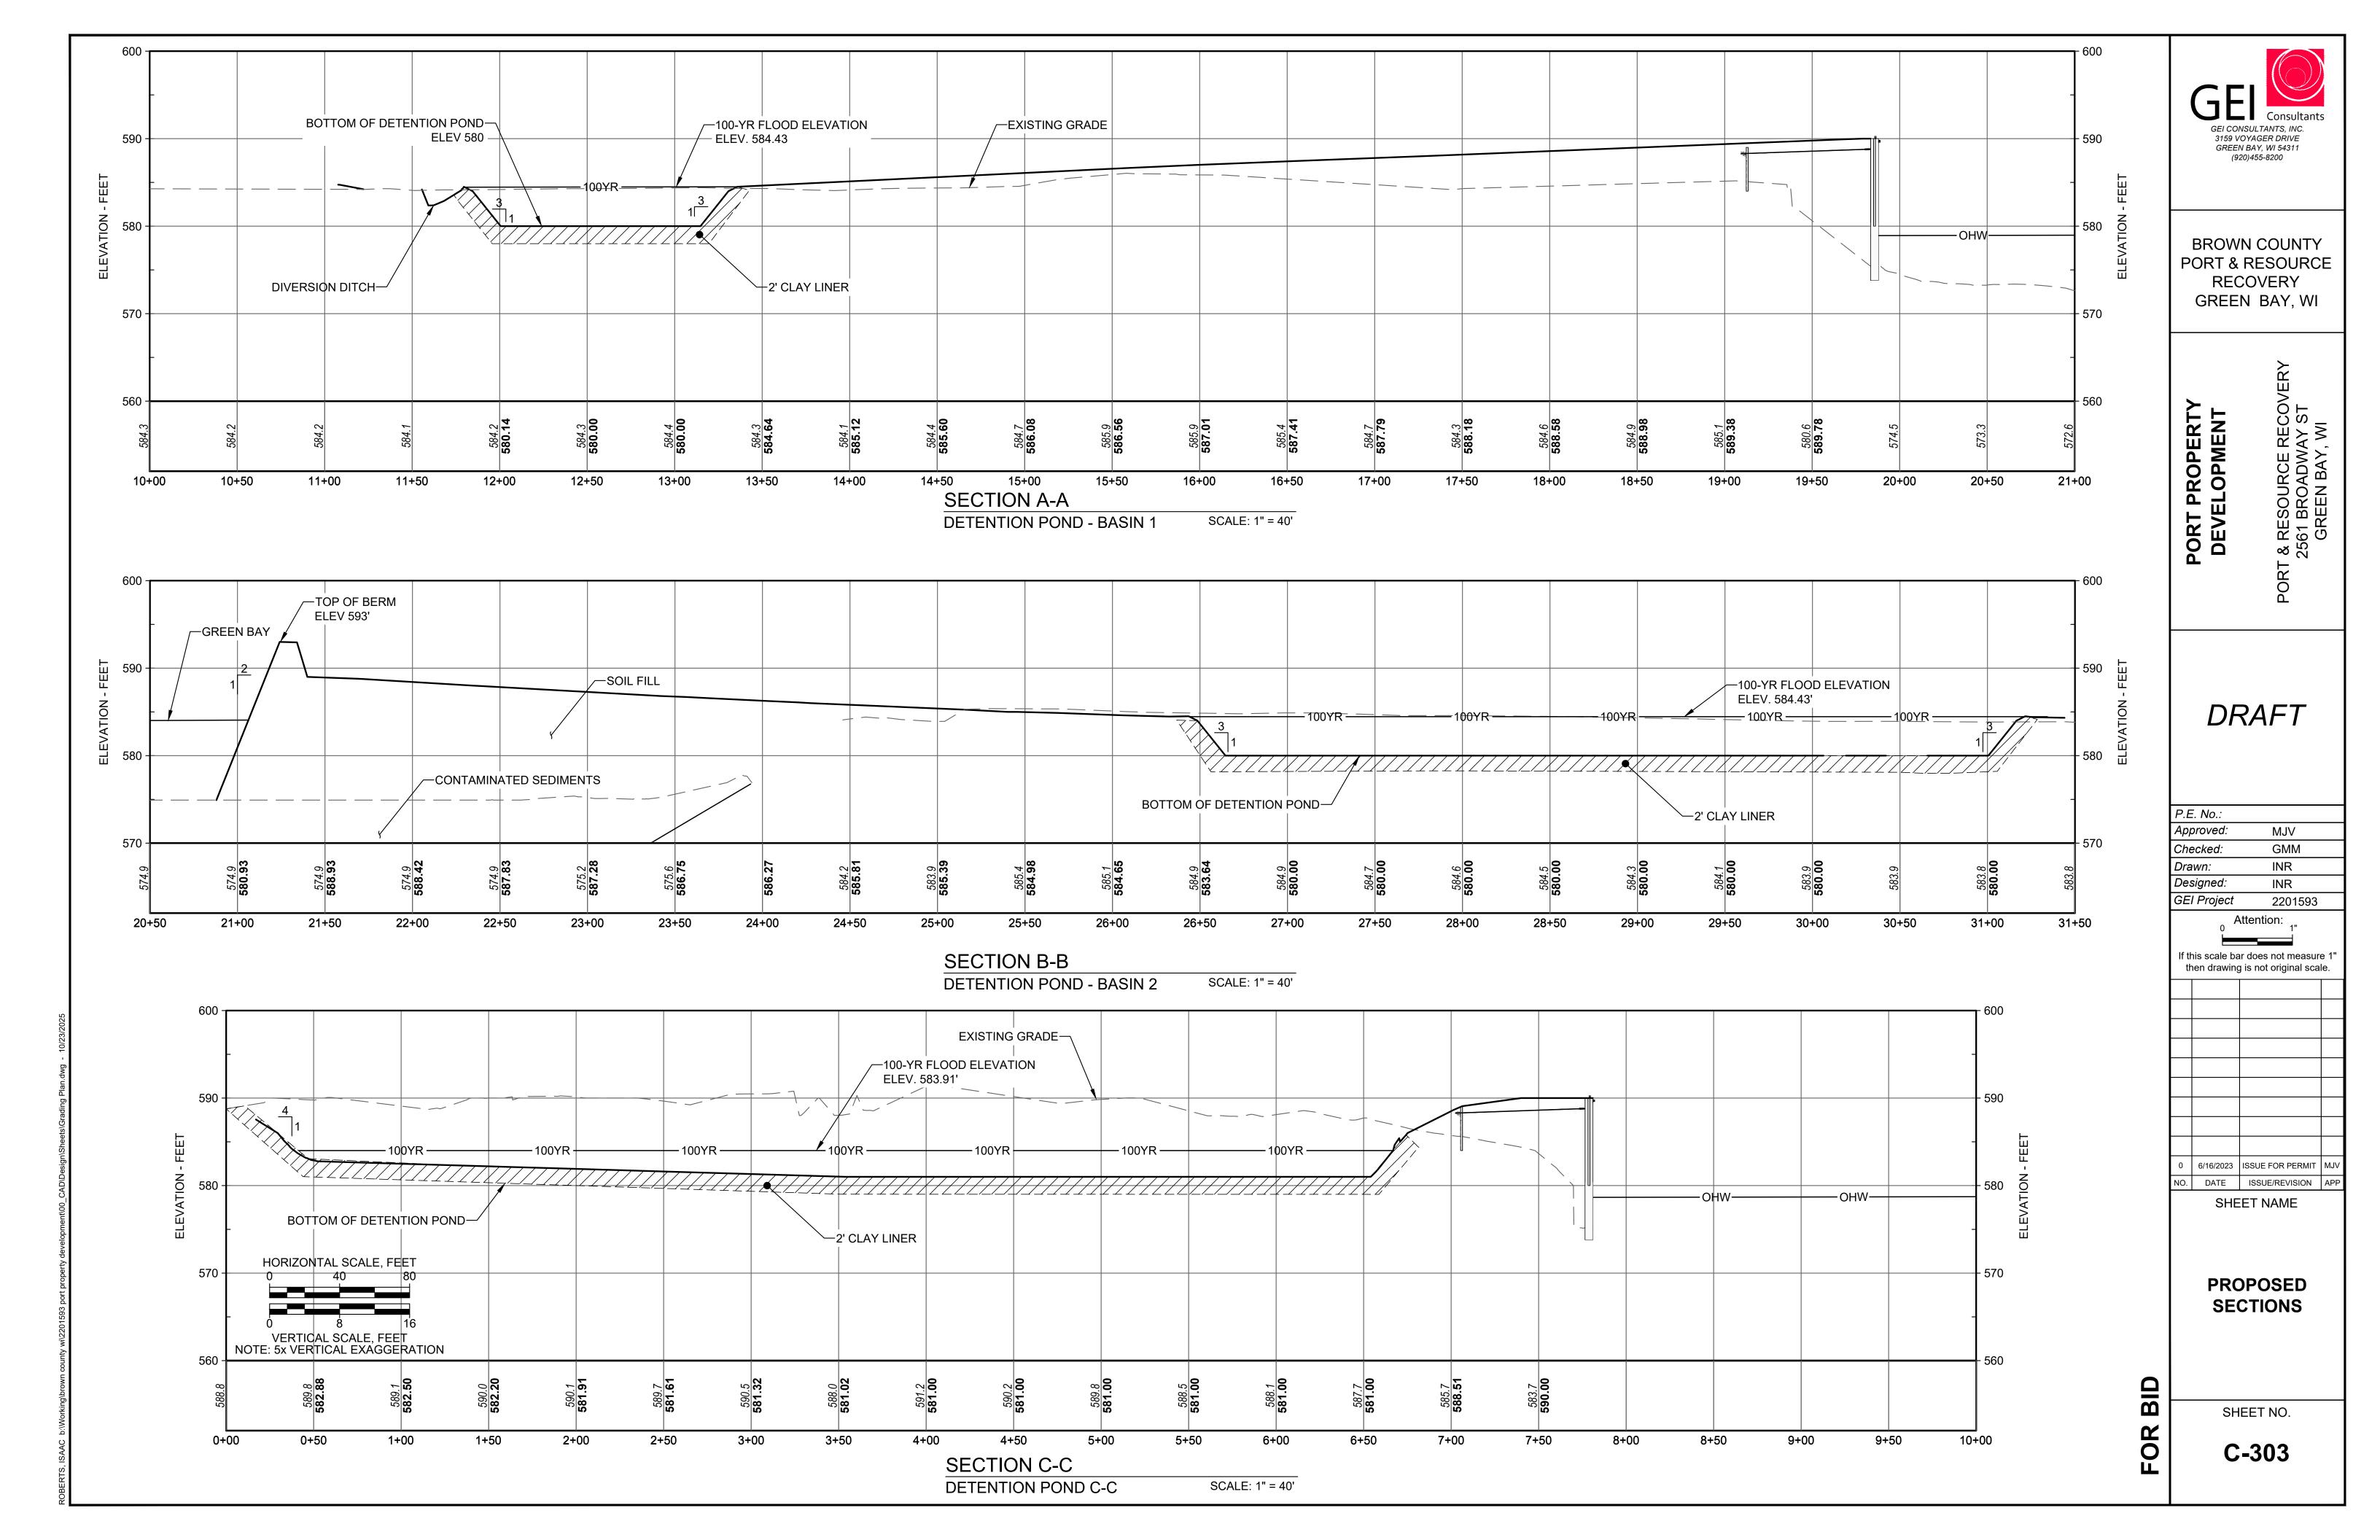

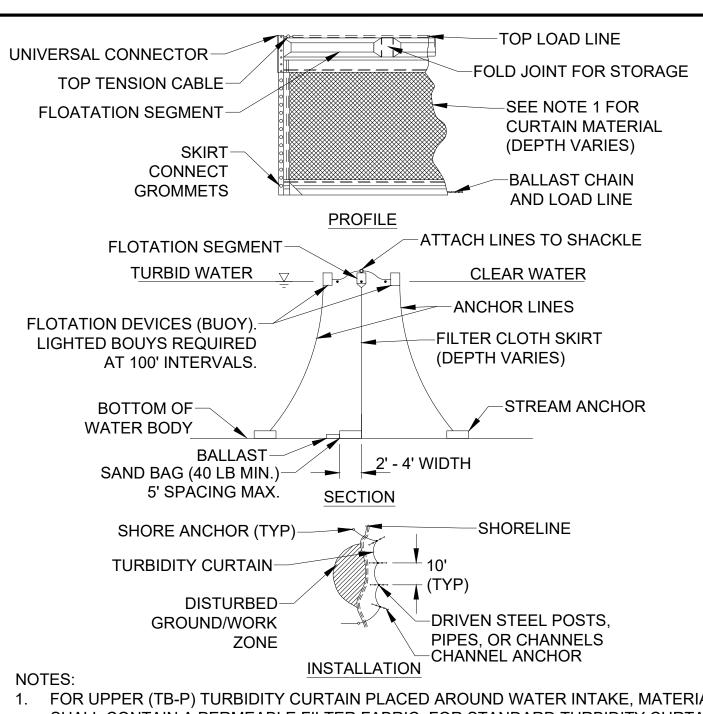


- 1. FOR UPPER (TB-P) TURBIDITY CURTAIN PLACED AROUND WATER INTAKE, MATERIAL SHALL CONTAIN A PERMEABLE FILTER FABRIC. FOR STANDARD TURBIDITY CURTAINS (TB-1) CONTAINING WORK AREAS WITH PLACEMENT OF ROCK ON THE DAM EMBANKMENT, THE MATERIAL SHALL BE IMPERMEABLE. FOR BOTTOM (TB-SM) TURBIDITY CURTAIN PLACED AROUND WATER INTAKES, FABRIC SHALL BE SAME AS STANDARD TURBIDITY CURTAIN.
- 2. IN WATERWAYS SUBJECT TO FLUCTUATING WATER ELEVATIONS, PROVISION, SHOULD BE MADE TO ALLOW THE WATER TO EQUALIZE ON EACH SIDE OF THE BARRIER. THIS MAY BE ACCOMPLISHED BY LEAVING A PORTION OF THE BARRIER OPEN ON THE UPSTREAM END.
- 3. REEFING LINES ARE REQUIRED TO BE INSTALLED AND USED TO SHORTEN CURTAIN DURING PERIODS OF LOW WATER LEVELS.
- 4. MINIMUM BARRIER HEIGHT SHALL BE 2' GREATER THAN EITHER THE O2 ELEVATION OR THE ESTIMATED HIGH WATER ELEVATION DURING CONSTRUCTION, WHICHEVER IS GREATER.

TURBIDITY CURTAIN NO SCALE

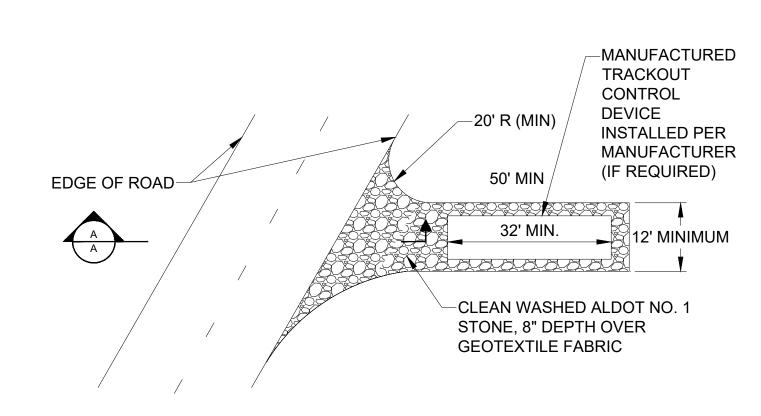


SECTION A-A

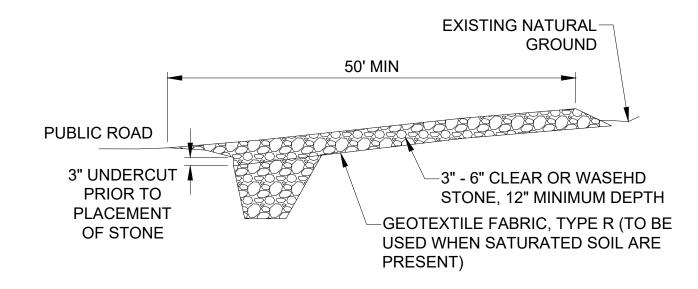

1. CONSTRUCTION, OPERATION, AND MAINTENANCE SHALL BE IN ACCORDANCE WITH WISCONSIN DNR CONSERVATION PRACTICE STANDARD 1057

CONSTRUCTION ENTRANCE

NO SCALE

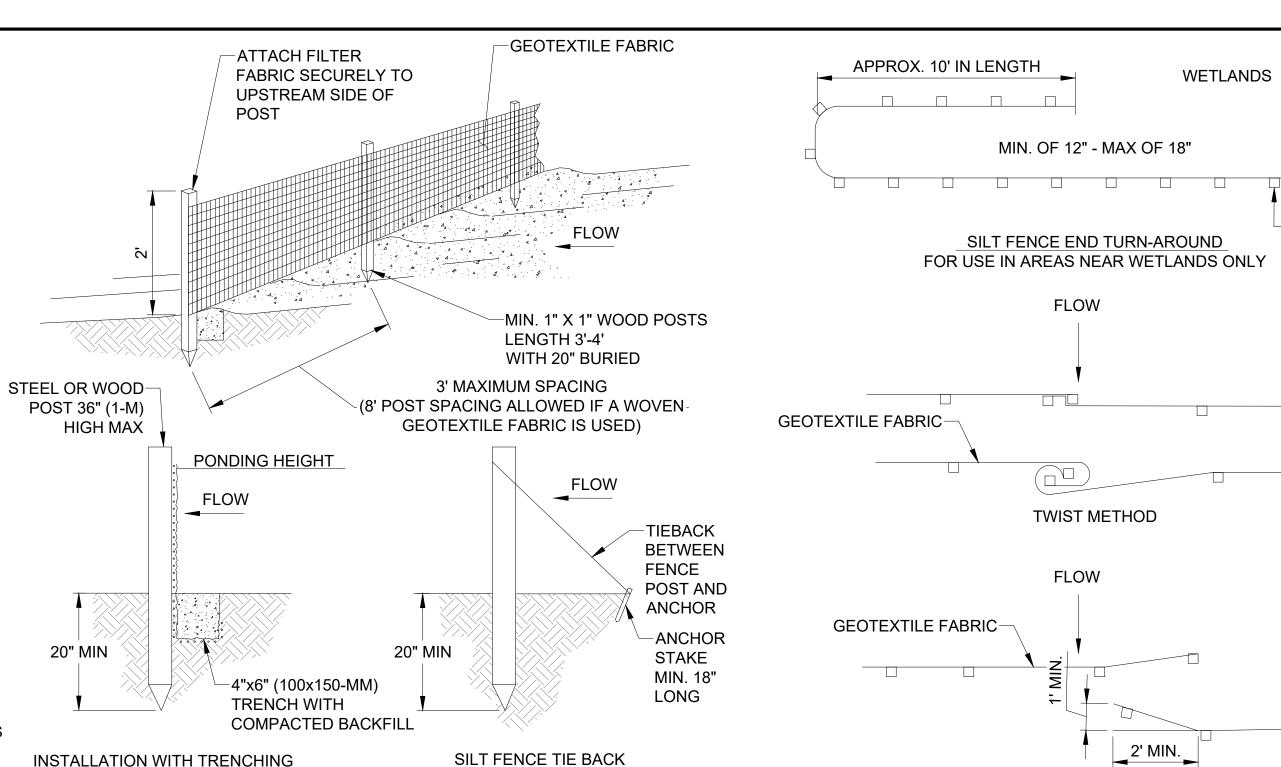

INSTALLATION WITH TRENCHING

(WHEN ADDITIONAL SUPPORT REQUIRED)

WOOD POST **HOOK METHOD**

-WOOD POST


JOINING TWO LENGTH OF SILT FENCE

NOTES:

- SILT FENCE SHALL BE PLACED ON SLOPE CONTOURS TO MAXIMIZE PONDING EFFICIENCY
- INSPECT AND REPAIR FENCE AFTER EACH STORM EVENT AND REMOVE SEDIMENT WHEN NECESSARY. 9" (225-MM) MAXIMUM RECOMMENDED STORAGE HEIGHT.
- REMOVED SEDIMENT SHALL BE DEPOSITED TO AN AREA THAT WILL NOT CONTRIBUTE SEDIMENT OFF-SITE AND CAN BE PERMANENTLY STABILIZED.
- WOOD POSTS SHALL BE MADE OF OAK OR HICKORY.
- CONSTRUCTION, OPERATION, AND MAINTENANCE SHALL BE IN ACCORDANCE WITH WDNR CONSERVATION PRACTICE STANDARD 1056.

SILT FENCE

NO SCALE

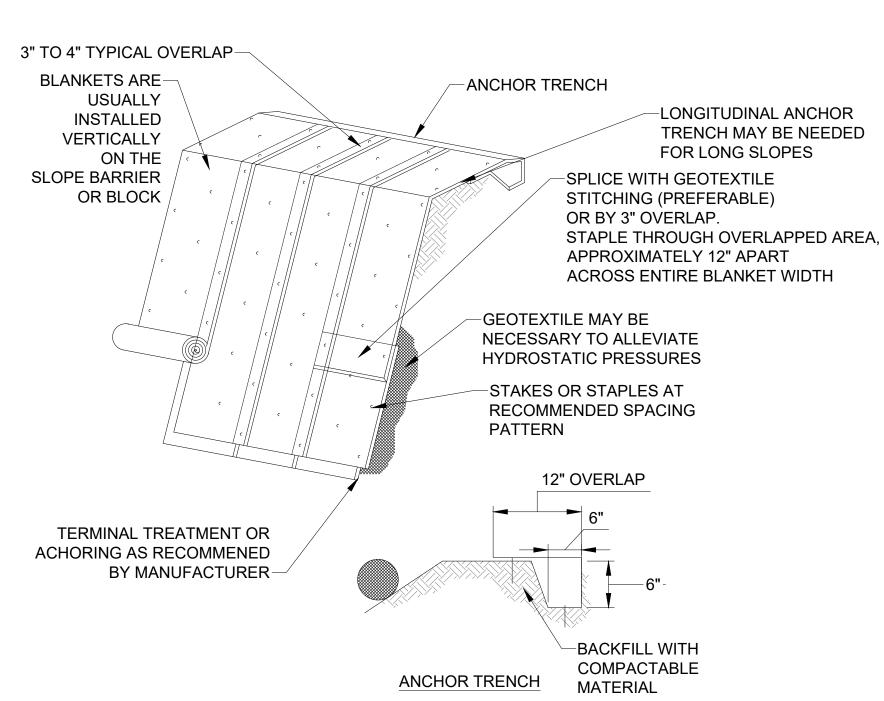

- 1. PREPARE SOIL BEFORE INSTALLING BLANKETS, INCLUDING APPLICATION OF LIME, FERTILIZER, AND SEED. NOTE: WHEN USING CELL-O-SEED DO NOT SEED PREPARED AREA. CELL-O-SEED MUST BE INSTALLED WITH PAPER SIDE DOWN
- 2. BEGIN AT THE TOP OF SLOPE BY ANCHORING THE BLANKET IN A 6" DEEP X 6" WIDE TRENCH WITH APPROXIMATELY 12" OF BLANKET. EXTEND BEYOND THE UP-SLOPE PORTION OF THE TRENCH. ANCHOR THE BLANKET WITH A ROW OF STAPLES/STAKES APPROXIMATELY 12" APART IN THE BOTTOM OF THE TRENCH. BACKFILL AND COMPACT THE TRENCH AFTER STAPLING. APPLY SEED TO COMPACTED SOIL AND FOLD REMAINING 12" PORTION OF BLANKET BACK OVER SEED AND COMPACTED SOIL. SECURE BLANKET OVER COMPACTED SOIL WITH A ROW OF STAPLES/STAKES SPACED APPROXIMATELY 12" APART ACROSS THE WIDTH OF THE BLANKET
- 3. STAKING OR STAPLING LAYOUT SHALL CONFORM TO MANUFACTURERS RECOMMENDATIONS FOR SLOPE AND GRADE

EROSION CONTROL BLANKET

NO SCALE




BROWN COUNTY PORT & RESOURCE RECOVERY

GREEN BAY, WI

ROPERT **OPMENT** \mathcal{O} Δ VEL DE 0

P.E. No.: Approved MJV GMM Checked: INR Drawn: Designed: INR GEI Project 2201593


Attention: If this scale bar does not measure 1 then drawing is not original scale

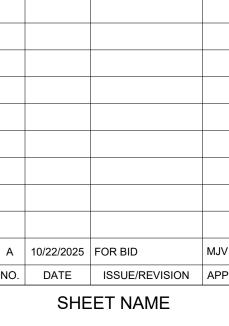


SITE DETAILS

SHEET NO.

C-500

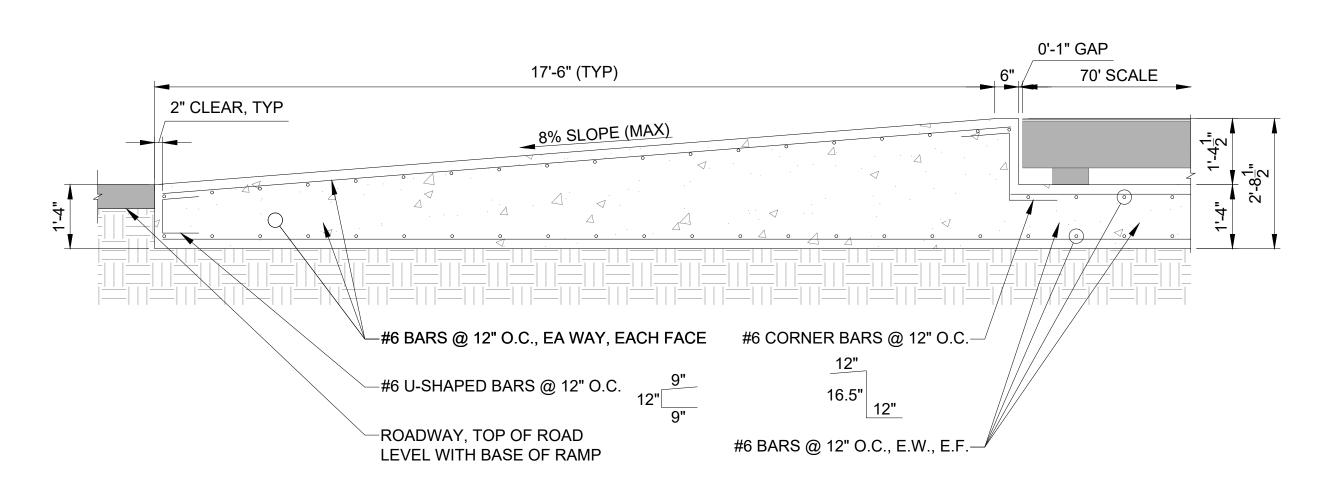

2 RAMP REINFORCEMENT DETAILS SCALE: 6" = 1'-0"

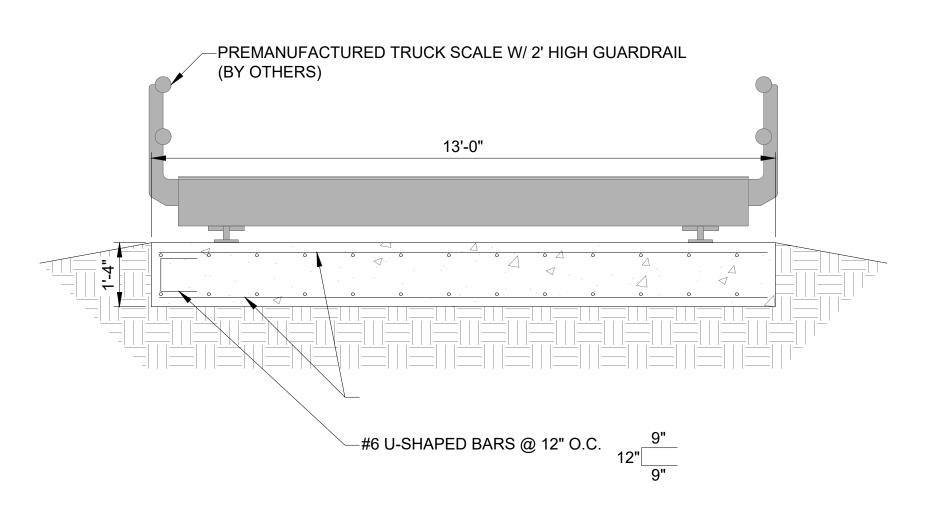


3 SCALE FOUNDATION SECTION

SCALE: 6" = 1'-0"

NOTES:

1. 6" THICK CONCRETE SLAB SHALL BE SHALL HAVE DIMENSIONS OF 1 FOOT WIDER THAN TOTAL EQUIPMENT WIDTH BY 3 FEET CLEARANCE IN FRONT OF EQUIPMENT.

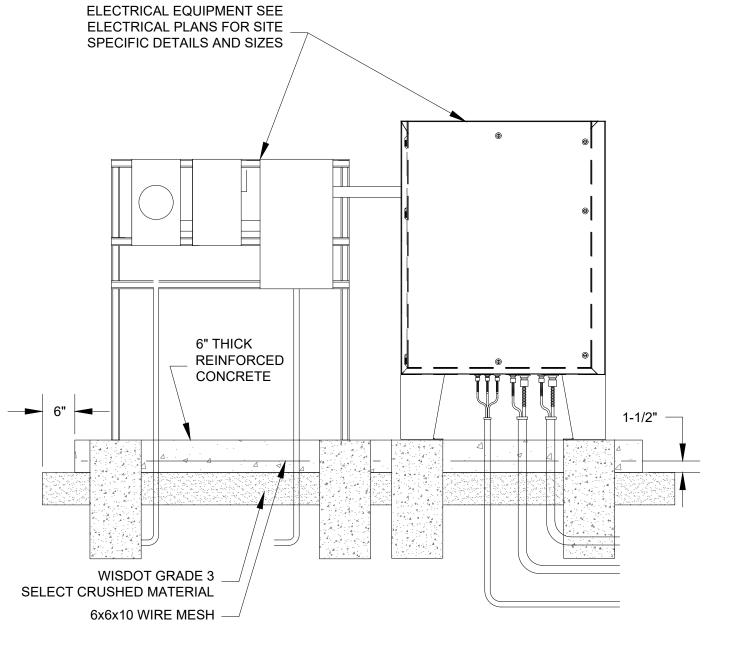


TYPICAL ELECTRICAL DROP EQUIPMENT PAD

NO SCALE

ELECTRICAL NOTES:

- 1. PROVIDE ELECTRICAL FEED TO A TRANSFORMER LOCATED NEAR TRUCK SCALE A.
- 2. SPLIT POWER TO TWO SEPARATE METER STATIONS AT TRUCK SCALE TRANSFORMER, ONE FOR METERING EACH OF THE TWO PARCELS ON SITE.
- 3. PROVIDE TWO SEPARATE ELECTRICAL FEEDS, ONE FROM EACH METER, TO POWER DROPS NEAR THE DOCK WALL ON EACH PARCEL. THE POWER DROP AT EACH PARCEL SHALL SUPPLY POWER TO TWO 800 KVA TRANSFORMERS.

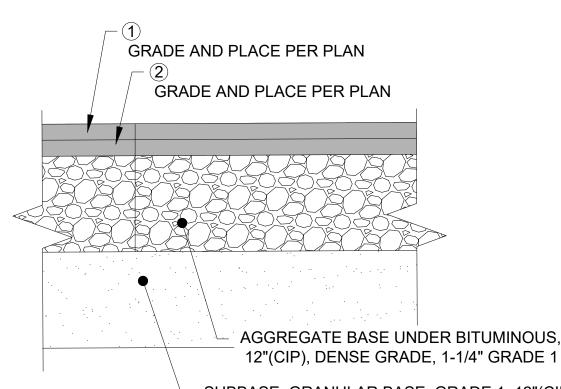

SUBBASE, GRANULAR BASE, GRADE 1, 12"(CIP), NOTES:

- 1. EXISTING MATERIAL MAY BE SUBSTITUTED FOR SUBBASE PROVIDED IT MEETS SPECIFICATIONS TO CONFORM TO WISDOT GRANULAR SUBBASE MATERIAL.
- 2. CONTRACTOR MUST SUBMIT ASPHALT MIX DESIGN TO ENGINEER FOR APPROVAL.
- 3. APPLICATION RATE OF 110#/SYD PER 1-INCH THICKNESS
- 4. REFER TO YOUR LOCAL DOT STANDARDS AND SPECIFICATIONS

HMA APPLICATION

ITEM	MIX	RATE OF APPLICATION	ESTIMATED THICKNESS	DESCRIPTION
1	4 HT 58-34 H	220 LB/SYD	2 INCHES	TOP COURSE
2	4 HT 58-34 H	220 LB/SYD	2 INCHES	LEVELING COURSE

PLACE HMA BOND COAT SS-1H; 0.05-0.15 GALLON/SYD AS DIRECTED BY THE ENGINEER BETWEEN HMA LAYERS (FOR INFORMATION ONLY, INCLUDED WITH PAYMENT FOR HMA MIXTURES) MINIMUM AWI (TOP COURSE ONLY) SHALL BE 220

STANDARD HMA SECTION

NO SCALE

GEI CONSULTANTS, INC.
3159 VOYAGER DRIVE
GREEN BAY, WI 54311
(920)455-8200

BROWN COUNTY
PORT & RESOURCE
RECOVERY
GREEN BAY, WI

OPMENT URCE RECOVERY

DEVEL
PORT & RESOL
2561 BRC
GREEN

P.E. No.:

Approved: MJV

Checked: GMM

Drawn: INR

Designed: INR

GEI Project 2201593

Attention:

If this scale bar does not measure 1 then drawing is not original scale.

A 10/22/2025 FOR BID MJ¹
NO. DATE ISSUE/REVISION API


SHEET NAME

SITE DETAILS

SHEET NO

SHEET NO.

C-501

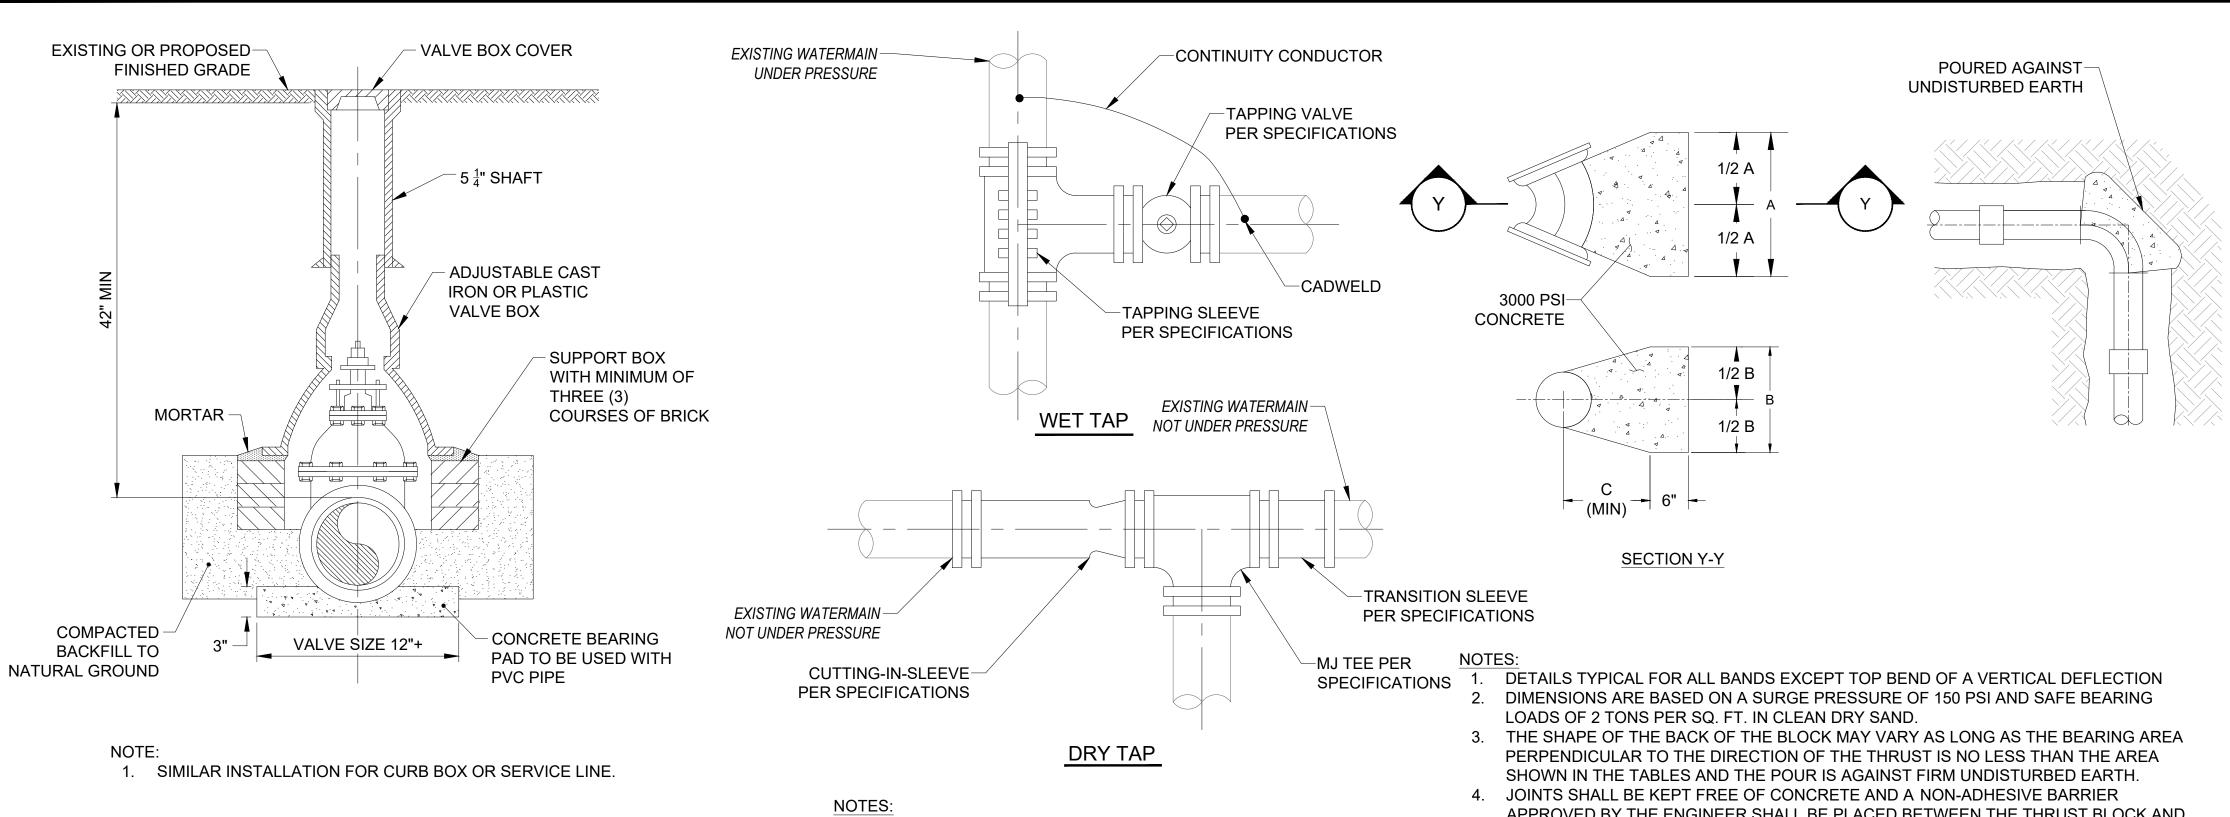

APPROVED BY THE ENGINEER SHALL BE PLACED BETWEEN THE THRUST BLOCK AND ALL MECHANICAL JOINTS.

MECHANICAL JOINT-

W/RETAINER GLAND(TYPICAL)

SCHEDULE FOR 22 1/2" AND 11 1/4" BENDS

W.M.	THRU	JST BLOCK	BEARING AREA*	
SIZE	A(MIN)	B(MIN)	C(MIN)	SQ. FT. (MIN)
6"	1'-0"	1'-0"	1'-0"	1.0
8"	1'-6"	1'-3"	1'-2"	1.9
10"	1'-9"	1'-6"	1'-4"	2.6
12"	2'-0"	1'-9"	1'-6"	3.5
16"	2'-6"	2'-0"	1'-9"	5.0

SCHEDULE FOR 45° BENDS

W.M.	THRU	JST BLOCK	BEARING AREA*	
SIZE	A(MIN)	B(MIN)	C(MIN)	SQ. FT. (MIN)
6"	1'-6"	1'-0"	1'-0"	1.5
8"	1'-6"	1'-6"	1'-3"	2.25
10"	2'-6"	1'-6"	1'-6"	3.75
12"	2'-6"	2'-0"	1'-9"	5.0
16"	4'-0"	2'-6"	2'-10"	10.0

SCHEDULE FOR 90° BENDS

W.M.	THRU	JST BLOCK	CDIM.	BEARING AREA*	
SIZE	A(MIN)	B(MIN)	C(MIN)	SQ. FT. (MIN)	
6"	1'-6"	1'-6"	1'-0"	2.25	
8"	2'-0"	2'-0"	1'-3"	4.0	
10"	3'-6"	2'-0"	1'-6"	7.0	
12"	3'-6"	2'-6"	1'-9"	9.0	
16"	4'-0"	4'-0"	2'-10"	16.0	

*MEASURED PERPENDICULAR TO DIRECTION OF THRUST CAUSED BY BENDS

VALVE BOX DETAIL NO SCALE

TAP EXISTING WATERMAIN NO SCALE

1. ALL JOINTS SHALL BE MADE USING MECHANICAL JOINT

FITTINGS WITH RETAINER GLANDS.

TRENCH BACKFILL PER SPECIFICATIONS PLACE TRENCH BACKFILL IN COMPACTED 8" LAYER PLACE FOUNDATION BACKFILL IN 12" MIN. COMPACTED 6" LAYERS HAND PLACED AND D COMPACTED WISDOT 6" MIN. MATERIAL PER **SPECIFICATIONS** 6" MIN. OR

1. EXCAVATE AND PLACE FOUNDATION BACKFILL AT LEAST 6 INCHES BELOW THE BOTTOM OF THE PIPE. IF ROCK, HARDPAN, OR FRAGMENTED MATERIAL EXISTS THE DEPTH IS THE GREATER OR 6 INCHES BELOW THE PIPE OR TO A DEPTH EQUAL TO 1/2 INCH PER FOOD OF PROPOSED EMBANKMENT ABOVE THE TOP OF THE PIPE. 3.

1/2 O.D. MAX

NO SCALE

2. THE BACKFILL MATERIALS AND METHODS SHALL CONFORM TO THE SPECIFICATIONS.

45° BEND 45° BEND -**EXISTING** UTILITY 18" MIN 45° BEND 45° BEND ID EVICTING LITH ITV

ID EXISTING UTILITY						
W.M.			<12	12	24	36
6"		Α	23"	28 1/2"	34"	40"
O		В	13"	16 1/2"	22"	27 1/2"
8"	Α	24"	29 1/2"	35"	40 1/2"	
0	MIN	В	13 1/2"	13 1/2"	19"	24 1/2"
10"	DIMENSION	Α	25"	30 1/2"	36"	41 1/2"
10	_	В	14"	14"	16"	21 1/2"
401		Α	25"	31 1/2"	37"	42 1/2"
12'		В	14 1/2"	14 1/2"	14 1/2"	18 1/2"
*=LENGTH GOVERNED BY BELL ON FITTINGS						

WHEN CROSSING UNDER STORM OR SANITARY SEWERS. THE DIMENSION "B"

- SEWER. 2. ALL JOINTS SHALL BE MADE USING MECHANICAL JOINT FITTINGS WITH RETAINER 6" AUXILIARY GATE VALVE-GLANDS. THE ENGINEER MAY ALLOW OTHER TYPES OF JOINT RESTRAINTS IF CIRCUMSTANCES WARRANT. ANY MODIFICATIONS MUST BE APPROVED BY THE
- ENGINEER IN WRITING PRIOR TO CONSTRUCTION. CONTRACTOR MUST SUPPORT EXISTING UTILITY DURING CONSTRUCTION. CONTRACTOR RESPONSIBLE FOR REPAIR OF DAMAGE TO EXISTING UTILITIES AT NOTES:

SHALL BE A FULL LENGTH OF PIPE WITH JOINTS AT EQUAL DISTANCE FROM THE DRAIN PLUG CONCRETE-TO REMAIN BLOCK IN HYDRANT AND VALVE BOX -BACKFILL AROUND ELEV. VIEW (A-A) DRAIN HOLE WITH 6" DI WATERMAIN-1 CUBIC YARD ALDOT AGGREGATE #57

TEE |

FOR VALVE BOX INSTALLATION,-

SEE TYPICAL VALVE BOX

INSTALLATION DETAIL

1. ALL HYDRANT LEAD FITTINGS, INCLUDING ALL THREE SIDES OF THE TEE, SHALL BE MECHANICAL JOINT WITH RETAINER GLANDS.

THRUST BLOCK DETAIL

NO SCALE

-6" AUXILIARY GATE VALVE

AND VALVE BOX

HYDRANT-

36"

MIN. 3.5' COVER

PLAN VIEW

-HYDRANT

-FLEXIBLE HYDRANT

2'x2'x2' DRAINAGE

PIT BENEATH

-GEOTEXTILE

OVER STONE

HYDRANT

FABRIC

FINDER

– 2" TYP

3159 VOYAGER DRIVE GREEN BAY, WI 54311 (920)455-8200

BROWN COUNTY PORT & RESOURCE RECOVERY GREEN BAY, WI

> COVE ST OPMENT

PROPERTY

PORT

DEVEL

P.E. No.: Approved: MJV GMM Checked: Drawn: Designed: INR GEI Project 2201593

Attention:

If this scale bar does not measure 1 then drawing is not original scale.

10/22/2025 FOR BID

DATE ISSUE/REVISION API

SHEET NAME


WATER DETAILS

SHEET NO.

C-503

PIPE BEDDING DETAIL

THEIR EXPENSE. 4. PROVIDE AND COMPACT FILL BETWEEN PIPES PER PROJECT DOCUMENTS. TYPICAL HYDRANT CONNECTION PRESSURE UTILITY CROSSING NO SCALE NO SCALE

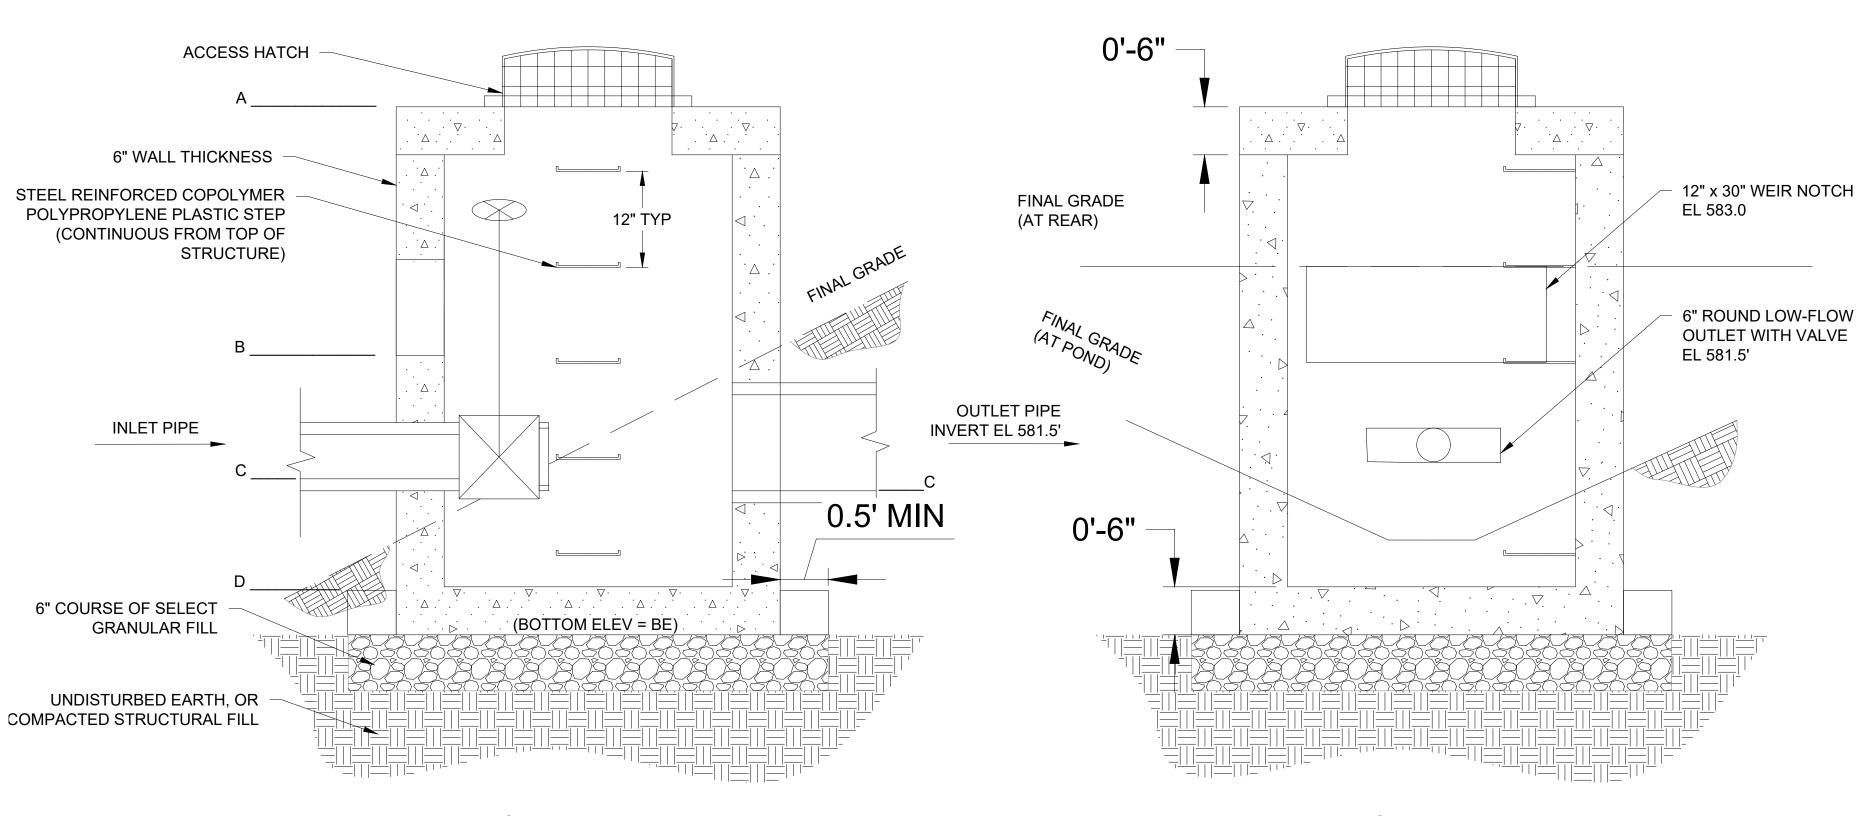

-	·— <u>=</u> <u>=</u>		' - -	— <u>= </u>
SIDE VIEW			<u>F</u>	FRONT VIEW
BASIN	А	В	С	EMERGENCY SPILLWAY
1	583.00	581.50	581.50	584.00
2	584.00	582.00	582.00	583.50

POND STRUCTURE OUTLET

NO SCALE


PLACE TRENCH BACKFILL IN COMPACTED 8" LAYER PLACE FOUNDATION BACKFILL IN COMPACTED 6" LAYERS HAND PLACED AND COMPACTED WISDOT 6" MIN. MATERIAL PER **SPECIFICATIONS** 6" MIN. OR 1/2 O.D. MAX

TRENCH BACKFILL PER SPECIFICATIONS

- 1. EXCAVATE AND PLACE FOUNDATION BACKFILL AT LEAST 6 INCHES BELOW THE BOTTOM OF THE PIPE. IF ROCK, HARDPAN, OR FRAGMENTED MATERIAL EXISTS, THE DEPTH IS THE GREATER OR 6 INCHES BELOW THE PIPE OR TO A DEPTH EQUAL TO 1/2 INCH PER FOOD OF PROPOSED EMBANKMENT ABOVE THE TOP OF THE PIPE.
- 2. THE BACKFILL MATERIALS AND METHODS SHALL CONFORM TO THE SPECIFICATIONS.

PIPE BEDDING DETAIL NO SCALE


-4" HMA STORAGE PAD

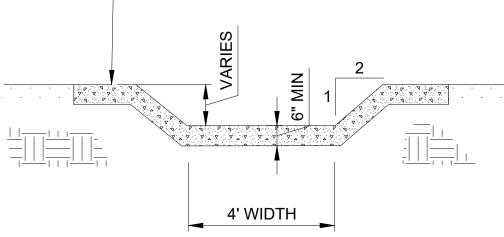

- 2. GRANULAR BASE MATERIAL SHALL BE COMPACTED TO A MIN OF 95% MAXIMUM DRY DENSITY AS DETERMINED BY
- 3. CONCRETE REQUIREMENTS:
- 3.1. COMPRESSIVE STRENGTH: 4,500 PSI @ 28 DAYS
- 3.2. AIR ENTRAINMENT: 7.0% +/- 1.5%
- 3.3. SLUMP:
- 3.3.1. 0-3" WITHOUT ADMIXTURES OR WITH TYPE A OR D ADMIXTURE.
- 3.3.2. 0-6" AFTER THE ADDITION OF TYPE MR, F OR G ADMIXTURE.
- 4. SAW CUT 1/4 DEPTH CONTRACTION JOINTS AT 25' INTERVALS FIBER EXPANSION JOINTS TO BE INSTALLED AT 100' INTERVALS AND AT EACH CHANGE IN DIRECTION.

CONCRETE DRAINAGE SWALE

NO SCALE

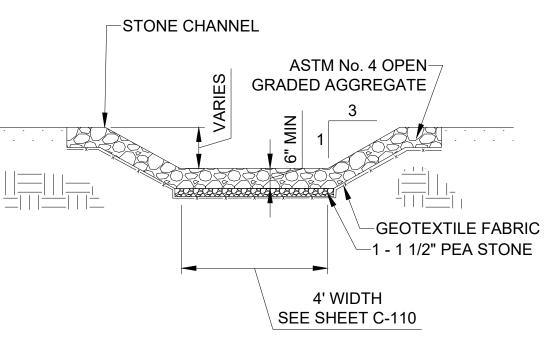

DRAINAGE SWALE - WITH STONE NO SCALE



NO SCALE

-6" PERFORATED HDPE PIPE, SDR 17



BROWN COUNTY PORT & RESOURCE RECOVERY GREEN BAY, WI

: RECOVERY VAY ST

DEVELOPMENT

PROPERTY

PORT

P.E. No.: MJVApproved: GMM Checked: Drawn: Designed: INR GEI Project 2201593

Attention:

If this scale bar does not measure 1 then drawing is not original scale.

10/22/2025 FOR BID NO. DATE ISSUE/REVISION APP SHEET NAME

STORM DETAILS


SHEET NO.

C-504

BID OR

1. COMPACT SUBGRADE MATERIAL TO A MIN. OF 95% MAXIMUM DRY DENSITY AS DETERMINED BY ASTM-D1557. ASTM-D1557.

12" CLEAN STONE-

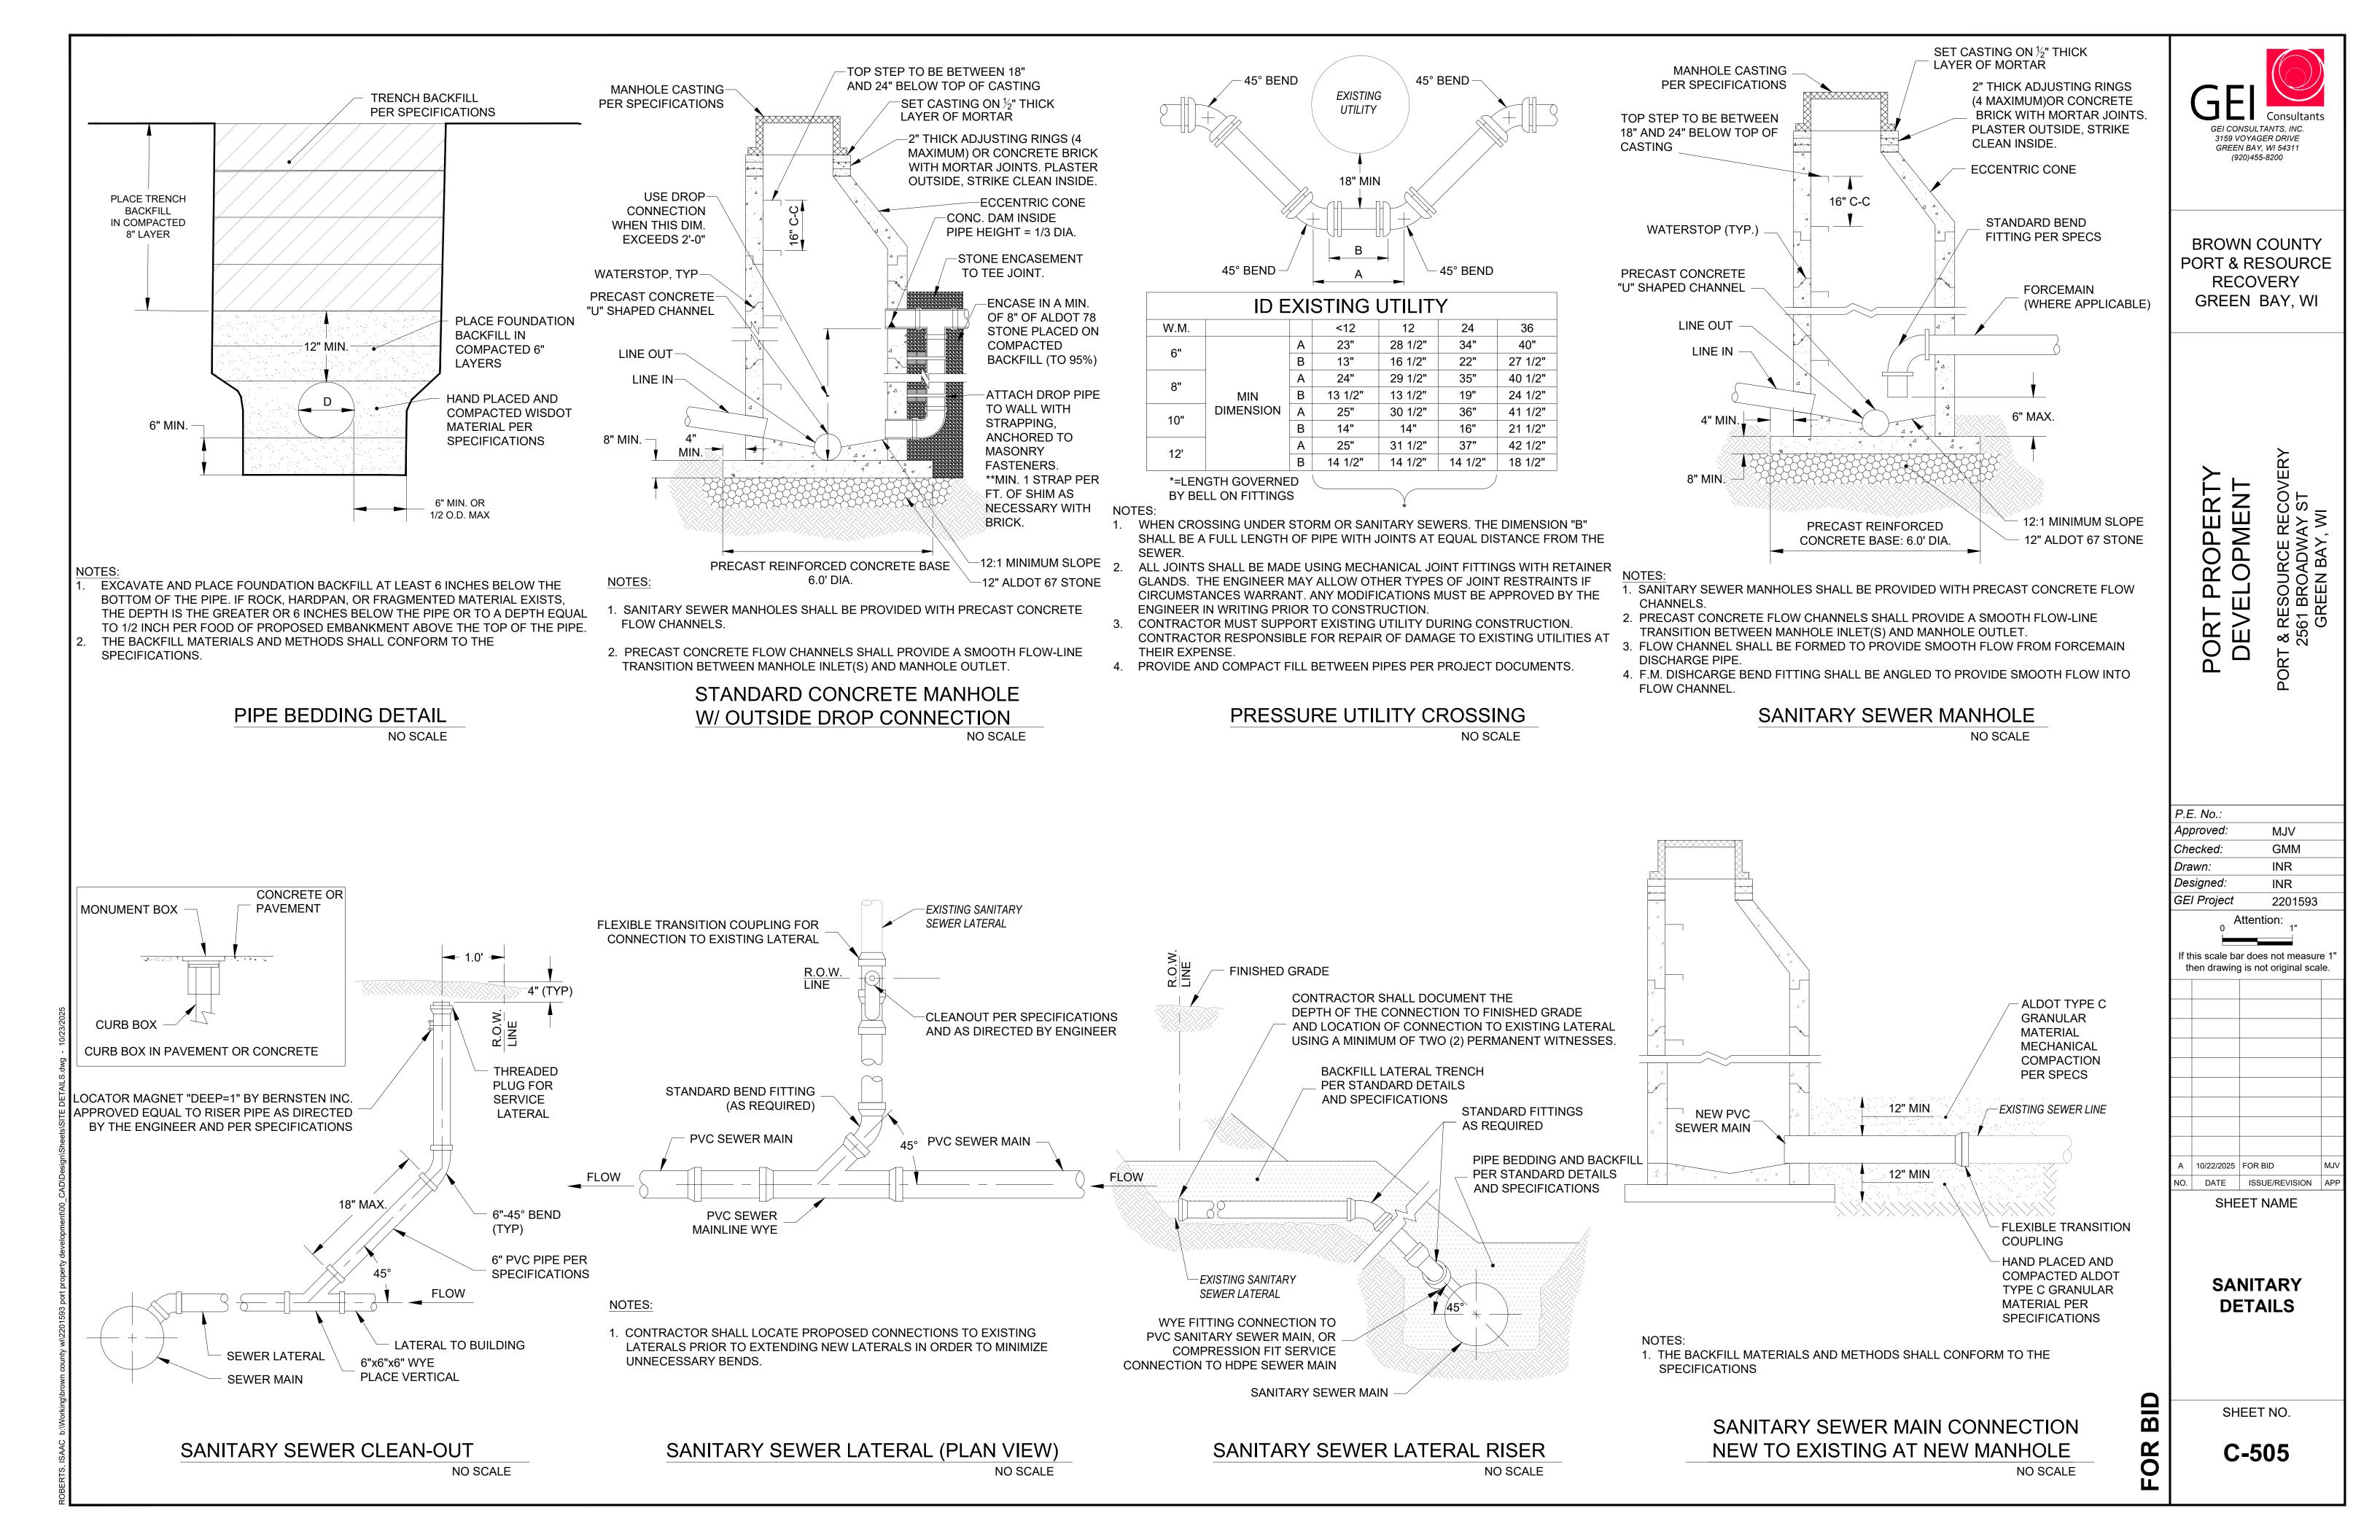

DOCKWALL DESIGN CRITERIA:

LIVE LOADS:

- UNIFORMLY DISTRIBUTED LIVE LOAD (UDLL): 500 PSF

BULK STOCKPILING:

BULK STOCKPILING BASED ON MATERIAL PROPERTIES IDENTIFIED BELOW. MINIMUM DISTANCE FROM DOCKWALL SHALL BE MEASURED AS THE DISTANCE FROM THE TOE OF THE STOCKPILE TO THE OUTBOARD FACE OF THE DOCKWALL. LOADING IN AREAS NOT USED FOR BULK STOCKPILING SHALL BE LIMITED TO THE UNIFORMLY DISTRIBUTED LIVE LOAD. SEE LOADING DIAGRAMS AND PLAN THIS SHEET.

-STOCKPILE

UDLL

DOCKWALL LOADING DIAGRAM

NOT TO SCALE

-FACE OF

DOCKWALL

DREDGE EL. 554'

(NAVD88)

-MAX OVERDREDGE

EL. 552'

- COAL

- MAXIMUM UNIT WEIGHT: 60 PCF
- MAXIMUM ANGLE OF REPOSE (0): 36 DEGREES
- MAXIMUM STOCKPILE HEIGHT (H): 60 FEET (EQUIVALENT SURCHARGE 3,600 PSF)
- MINIMUM DISTANCE FROM DOCKWALL (L): 15 FEET

- LIMESTONE (ROAD SALT SIMILAR):

- MAXIMUM UNIT WEIGHT: 100 PCF
- MAXIMUM ANGLE OF REPOSE (@): 45 DEGREES
- MAXIMUM STOCKPILE HEIGHT (H): 40 FEET (EQUIVALENT SURCHARGE 4,000 PSF)
- MINIMUM DISTANCE FROM DOCKWALL (L): 50 FEET

DESIGN VESSEL:	DESIGN	MAXIMUM
- LENGTH OVERALL	740 FEET	1000 FEET
- LENGTH BETWEEN PERPENDICULARS	730 FEET	
- BEAM	78 FEET	105 FEET
- DESIGN DRAFT	22 FEET	
- DISPLACEMENT	30,000 TONS	45,000 TONS
- OFFLOADER REACH	MAX 300 FEET	MIN 230 FEET

BERTH DEPTH:

- DESIGN BERTH DEPTH: 24 FT (ELEV. 554.0)
- OVERDREDGE TOLERANCE: 2 FT (ELEV. 552.0)

SEISMIC DESIGN:

- RISK CATEGORY II

- SITE CLASS E
- PGA 0.024 - S_s 0.052
- S_s 0.052 - S₁ 0.033
- F_{PGA} 1.6
- F_a 1.6
- F_v 2.4
- PGA_m 0.061
- S_{ms} 0.084
- S_{m1} 0.08 - PGA_D 0.041
- S_{DS} 0.056
- $-S_{D1}^{50}$ 0.053

STRUCTURAL STEEL AND MISCELLANEOUS METALS:

- 1. STRUCTURAL STEEL SHALL BE DESIGNED IN ACCORDANCE WITH AISC SPECIFICATION FOR THE DESIGN, FABRICATION, AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS
- 2. STEEL SHALL CONFORM TO THE FOLLOWING ASTM GRADES:

- STEEL SHEETPILES SEE BELOW

- HOLLOW TUBE A-500, GRADE C
- HIGH STRENGTH BOLTS F3125, GRADE A325
 - ALL-THREADED BAR ASTM A615 GRADE 75/80
 ALL OTHER STRUCTURAL STEEL A592 GRADE 50 (Fy 50 KSI) UNO

3. WELDING SHALL CONFORM TO AWS


- WELDING ELECTRODES AWS E70XX
- 4. ALL NEW STEEL HARDWARE AND FABRICATIONS SHALL BE HOT DIPPED GALVANIZED AND CONFORM TO ASTM A-123 AND/OR A-153 UNLESS OTHERWISE NOTED.
- 5. THE CONTRACTOR SHALL COORDINATE ALL DIMENSIONS SHOWN ON THE PLANS WITH THE VARIOUS TRADES, SIZE OF UNITS AND EXISTING CONDITIONS BEFORE DETAILING AND FABRICATING STEEL.
- 6. STAINLESS STEEL SHALL BE SERIES 300, TYPE 316 UNLESS OTHERWISE NOTED.

STEEL SHEET PILE DOCKWALL:

- 1. ALL STEEL FOR STEEL SHEET PILE DOCKWALL SHALL CONFORM TO ASTM A572 GR.60, MINIMUM YIELD STRESS OF 60 KSI.
 - TIP EL. SEE DRAWINGS
 - ALL STEEL PILES SHALL HAVE A MINIMUM STEEL THICKNESS OF $\frac{3}{8}$ " ON BOTH WEB AND FLANGE UNLESS A GREATER THICKNESS IS SPECIFIED ELSEWHERE.
- 2. TYPE 1 DOCKWALL (COMBI-WALL) SYSTEM SHALL CONSIST OF PIPE 54"Ø X 11/16" WALL KING PILES SPACED AT MAXIMUM 9.4' ON CENTER WITH STEEL SHEET PILES MEETING THE CRITERIA BELOW:MINIMUM SECTION MODULUS SHALL BE EQUIVALENT TO 170.6 CUBIC INCHES PER LINEAR FOOT OF INSTALLED COMBINATION WALL.
 - MINIMUM SECTION MODULUS SHALL BE EQUIVALENT TO 167 CUBIC INCHES PER LINEAR FOOT OF INSTALLED COMBINATION WALL.
 - MINIMUM MOMENT OF INERTIA SHALL BE 4,500 IN4 PER LINEAR FOOT OF INSTALLED COMBINATION WALL.
 - KING PILE SHALL HAVE A MINIMUM MOMENT OF INERTIA OF 40,900 IN4
- STEEL WALE INCLUDING ALL WASHER PLATES, SPLICE PLATES, FASTENERS, ETC. SHALL BE HOT DIP GALVANIZED UNLESS NOTED OTHERWISE.
 TIE RODS SHALL HAVE A MINIMUM ULTIMATE STRENGTH OF 960 KIPS (EQUIVALENT TO 103 KIPS/FT) AND A MINIMUM YIELD STRENGTH OF 720 KIPS (EQUIVALENT TO 76.5 KIPS/FT)
- 5. ARTICULATED BAR COUPLERS SHALL BE DESIGNED BY THE MANUFACTURER TO DEVELOP A MINIMUM OF 1.25 TIMES THE ULTIMATE TIE ROD BAR STRENGTH.

6. ANCHOR WALL

- SHALL CONSIST OF NZ19 STEEL SHEET PILES OR EQUIVALENT MEETING THE CRITERIA BELOW:
 - MINIMUM SECTION MODULUS SHALL BE EQUIVALENT TO 35.08 CUBIC INCHES PER LINEAR FOOT OF INSTALLED ANCHOR WALL.
- MINIMUM MOMENT OF INERTIA SHALL BE 283.1 IN⁴ PER LINEAR FOOT OF INSTALLED ANCHOR WALL.

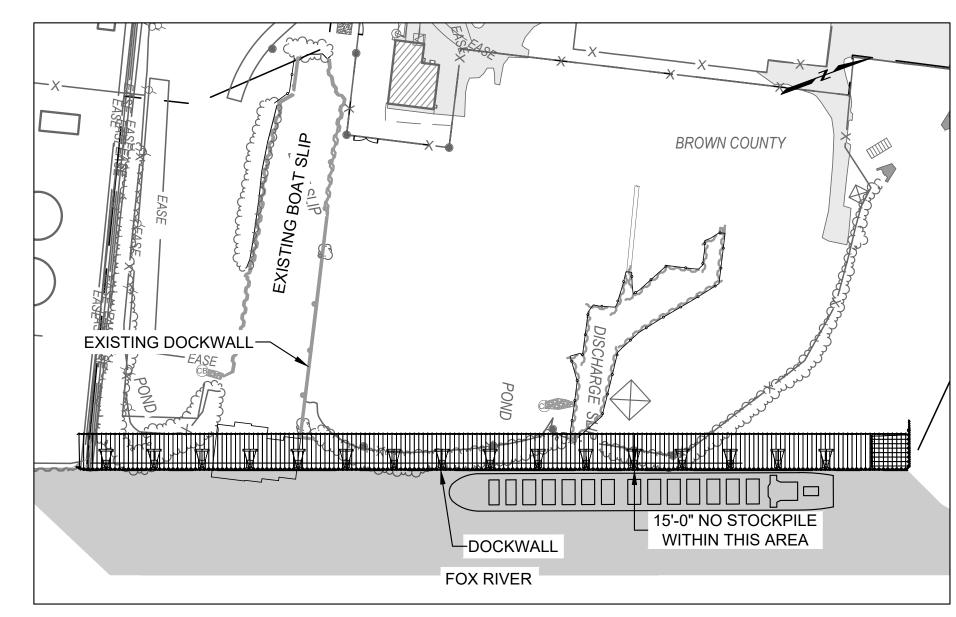

PLAN

LOC

ALLOWABLE STOCKPILE AREA SCALE: 1" = 200'

LIMIT OF CONSTRUCTION

ABBREVIATIONS

ABN/ABAN B BIT BM CB CIP CLF CONC CW DBYL EP EF EL EW EXTG FP GRAN INV LBS	ABANDONED BOTTOM BITUMINOUS BENCHMARK CATCH BASIN CAST IN PLACE CHAIN LINK FENCE CONCRETE CROSSWALK DOUBLE YELLOW LINE EDGE OF PAVEMENT EACH FACE ELEVATION EACH WAY EXISTING FIRE PROTECTION GRANITE INVERT POUNDS	N/F PED PW % SS SGE SL STR SW SWL SYL T TOW UHMW UNO VGC VLF	NOW OR FORMERLY PEDESTRIAN POTABLE WATER PROPERTY LINE SANITARY SEWER SLOPED GRANITE EDGING STOP LINE STAIRS SIDEWALK SOLID WHITE LINE SOLID YELLOW LINE TOP TOP OF WALL ULTRA HIGH MOLECULAR WEIGHT UNLESS NOTED OTHERWISE VERTICAL GRANITE CURB VINYL FENCE

LAKE DATUM (MENOMINEE, MI STATION ID 9087088)

MAXIMUM HIGH WATER	+583.70
(MAX HW) JUNE 2020	
CHART DATUM/LOW WATER	+577.94
(IGLD85 +577.50)	
MINIMUM LOW WATER	+575.30
(MIN LW) JAN 2013	
IGLD85	+0.44
NAVD88 (THIS PLAN SET)	0.00



BROWN COUNTY
PORT & RESOURCE
RECOVERY
GREEN BAY, WI

COVERY ST

DEVELOPMENT
PORT & RESOURCE RECOVER

PROPERTY

PORT

P.E. No.:


Approved: MJV
Checked: ADP
Drawn: JSF
Designed: EB
GEI Project 2201593

Attention: 1"
If this scale bar does not measure 1" then drawing is not original scale.

DOCKWALL
GENERAL NOTES

SHEET NO.

BID

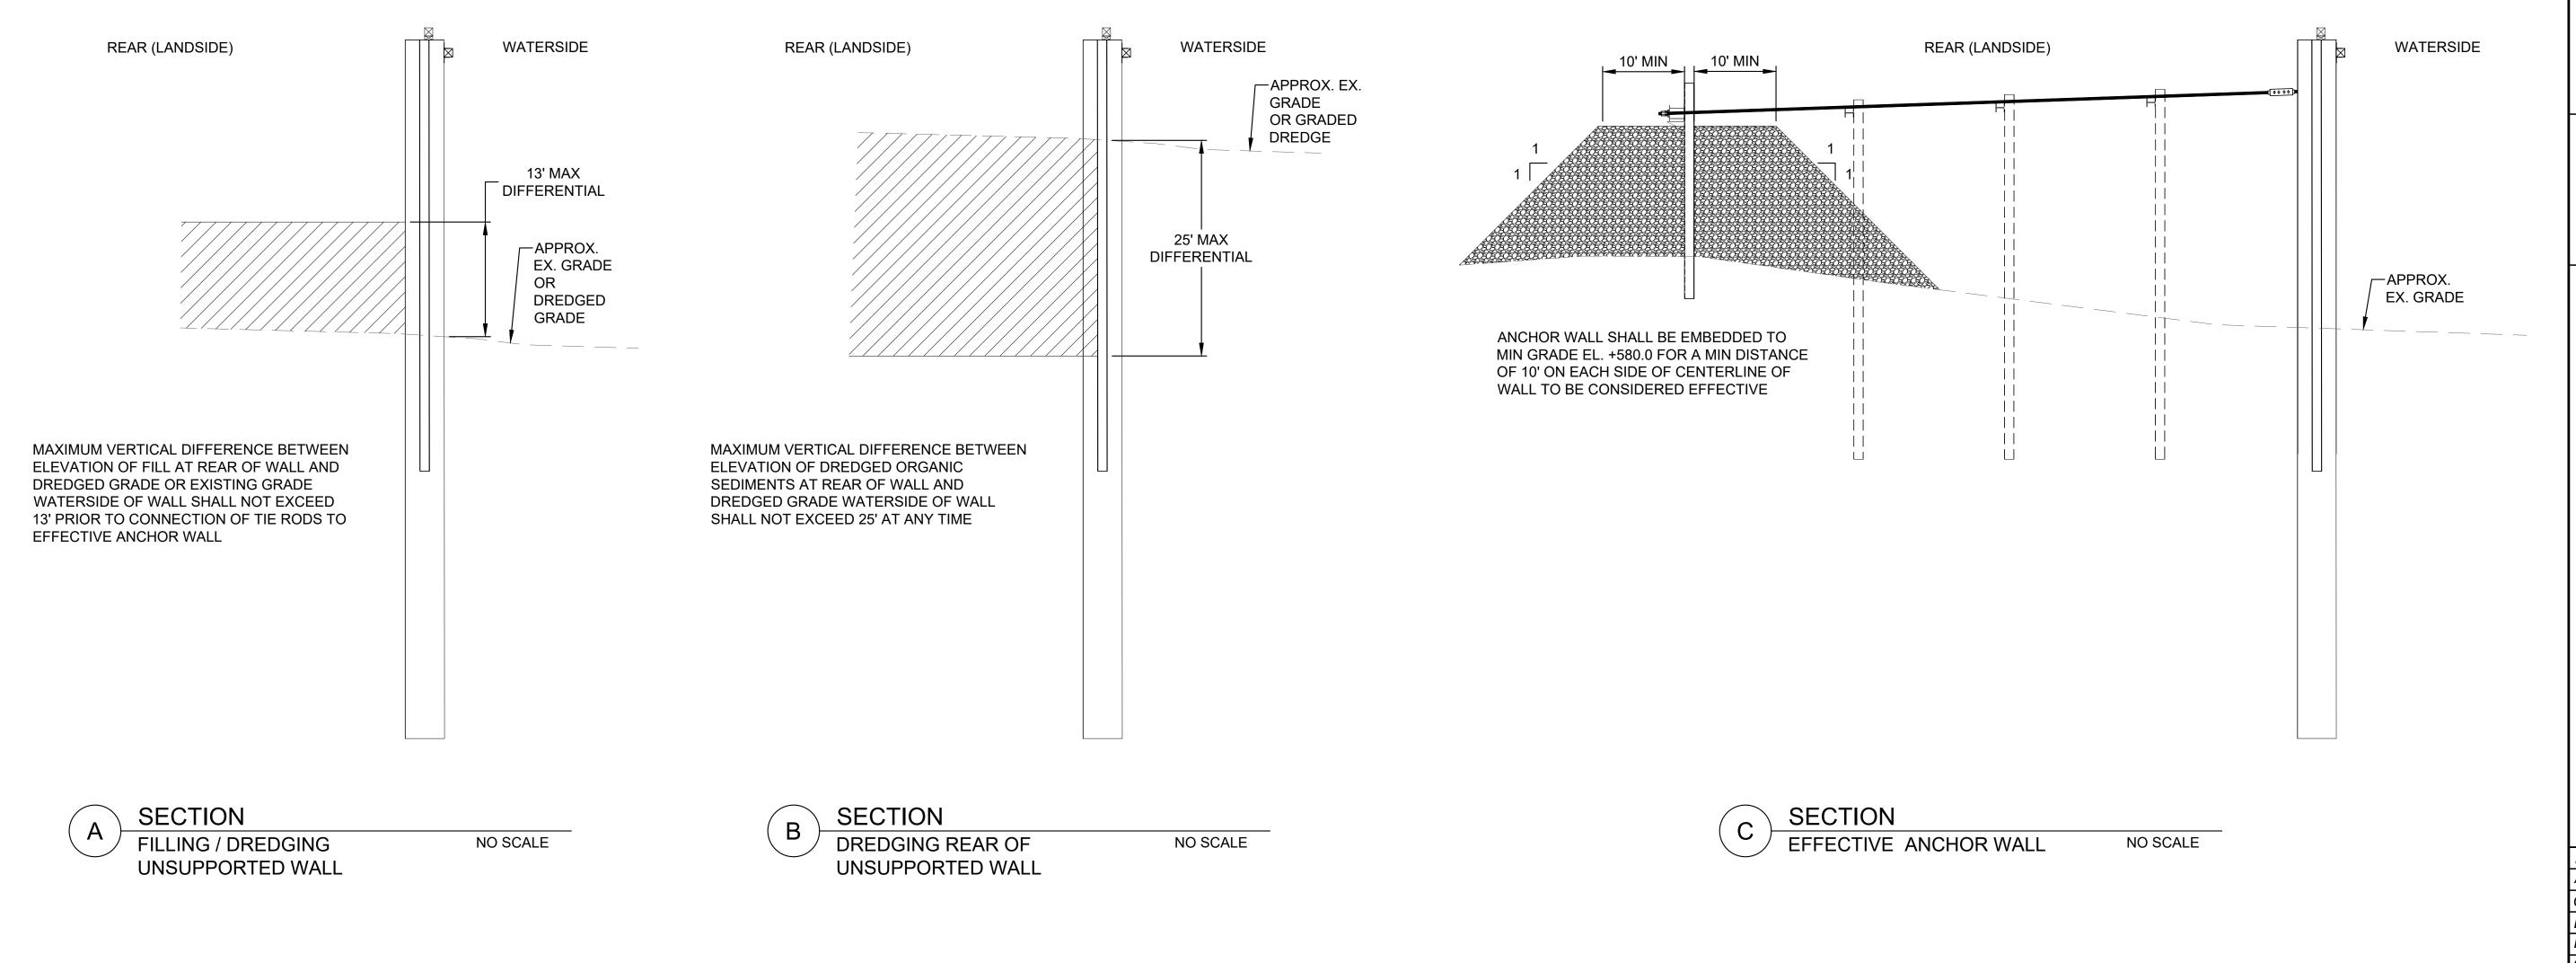

3159 VOYAGER DRIVE GREEN BAY, WI 54311 (920)455-8200

BROWN COUNTY PORT & RESOURCE RECOVERY GREEN BAY, WI

> ERECOVERY VAY ST Y, WI PROPERTY DEVELOPMENT

P.E. No.: Approved: MJVGMM Checked: INR Drawn: Designed: GEI Project 2201593

Attention:

If this scale bar does not measure 1" then drawing is not original scale.

A 10/22/2025 FOR BID NO. DATE ISSUE/REVISION APP

SHEET NAME


DOCKWALL **SEQUENCING CONSTRAINTS**


SHEET NO.


SM002

1. THE CONTRACTOR SHALL PREPARE A SEQUENCING PLAN FOR EACH STAGE OF WALL INSTALLATION, FILLING AND DREDGING WHICH SHALL COMPLY WITH THE SEQUENCING REQUIREMENTS ON THIS DRAWING. NO WORK SHALL COMMENCE UNTIL THE SEQUENCING PLAN HAS BEEN APPROVED.

2. THE CONTRACTOR'S SEQUENCING PLAN SHALL INCLUDE CONTINUOUS MONITORING OF THE DOCK WALL AND ANCHOR WALL DURING ALL FILLING AND DREDGING OPERATIONS.

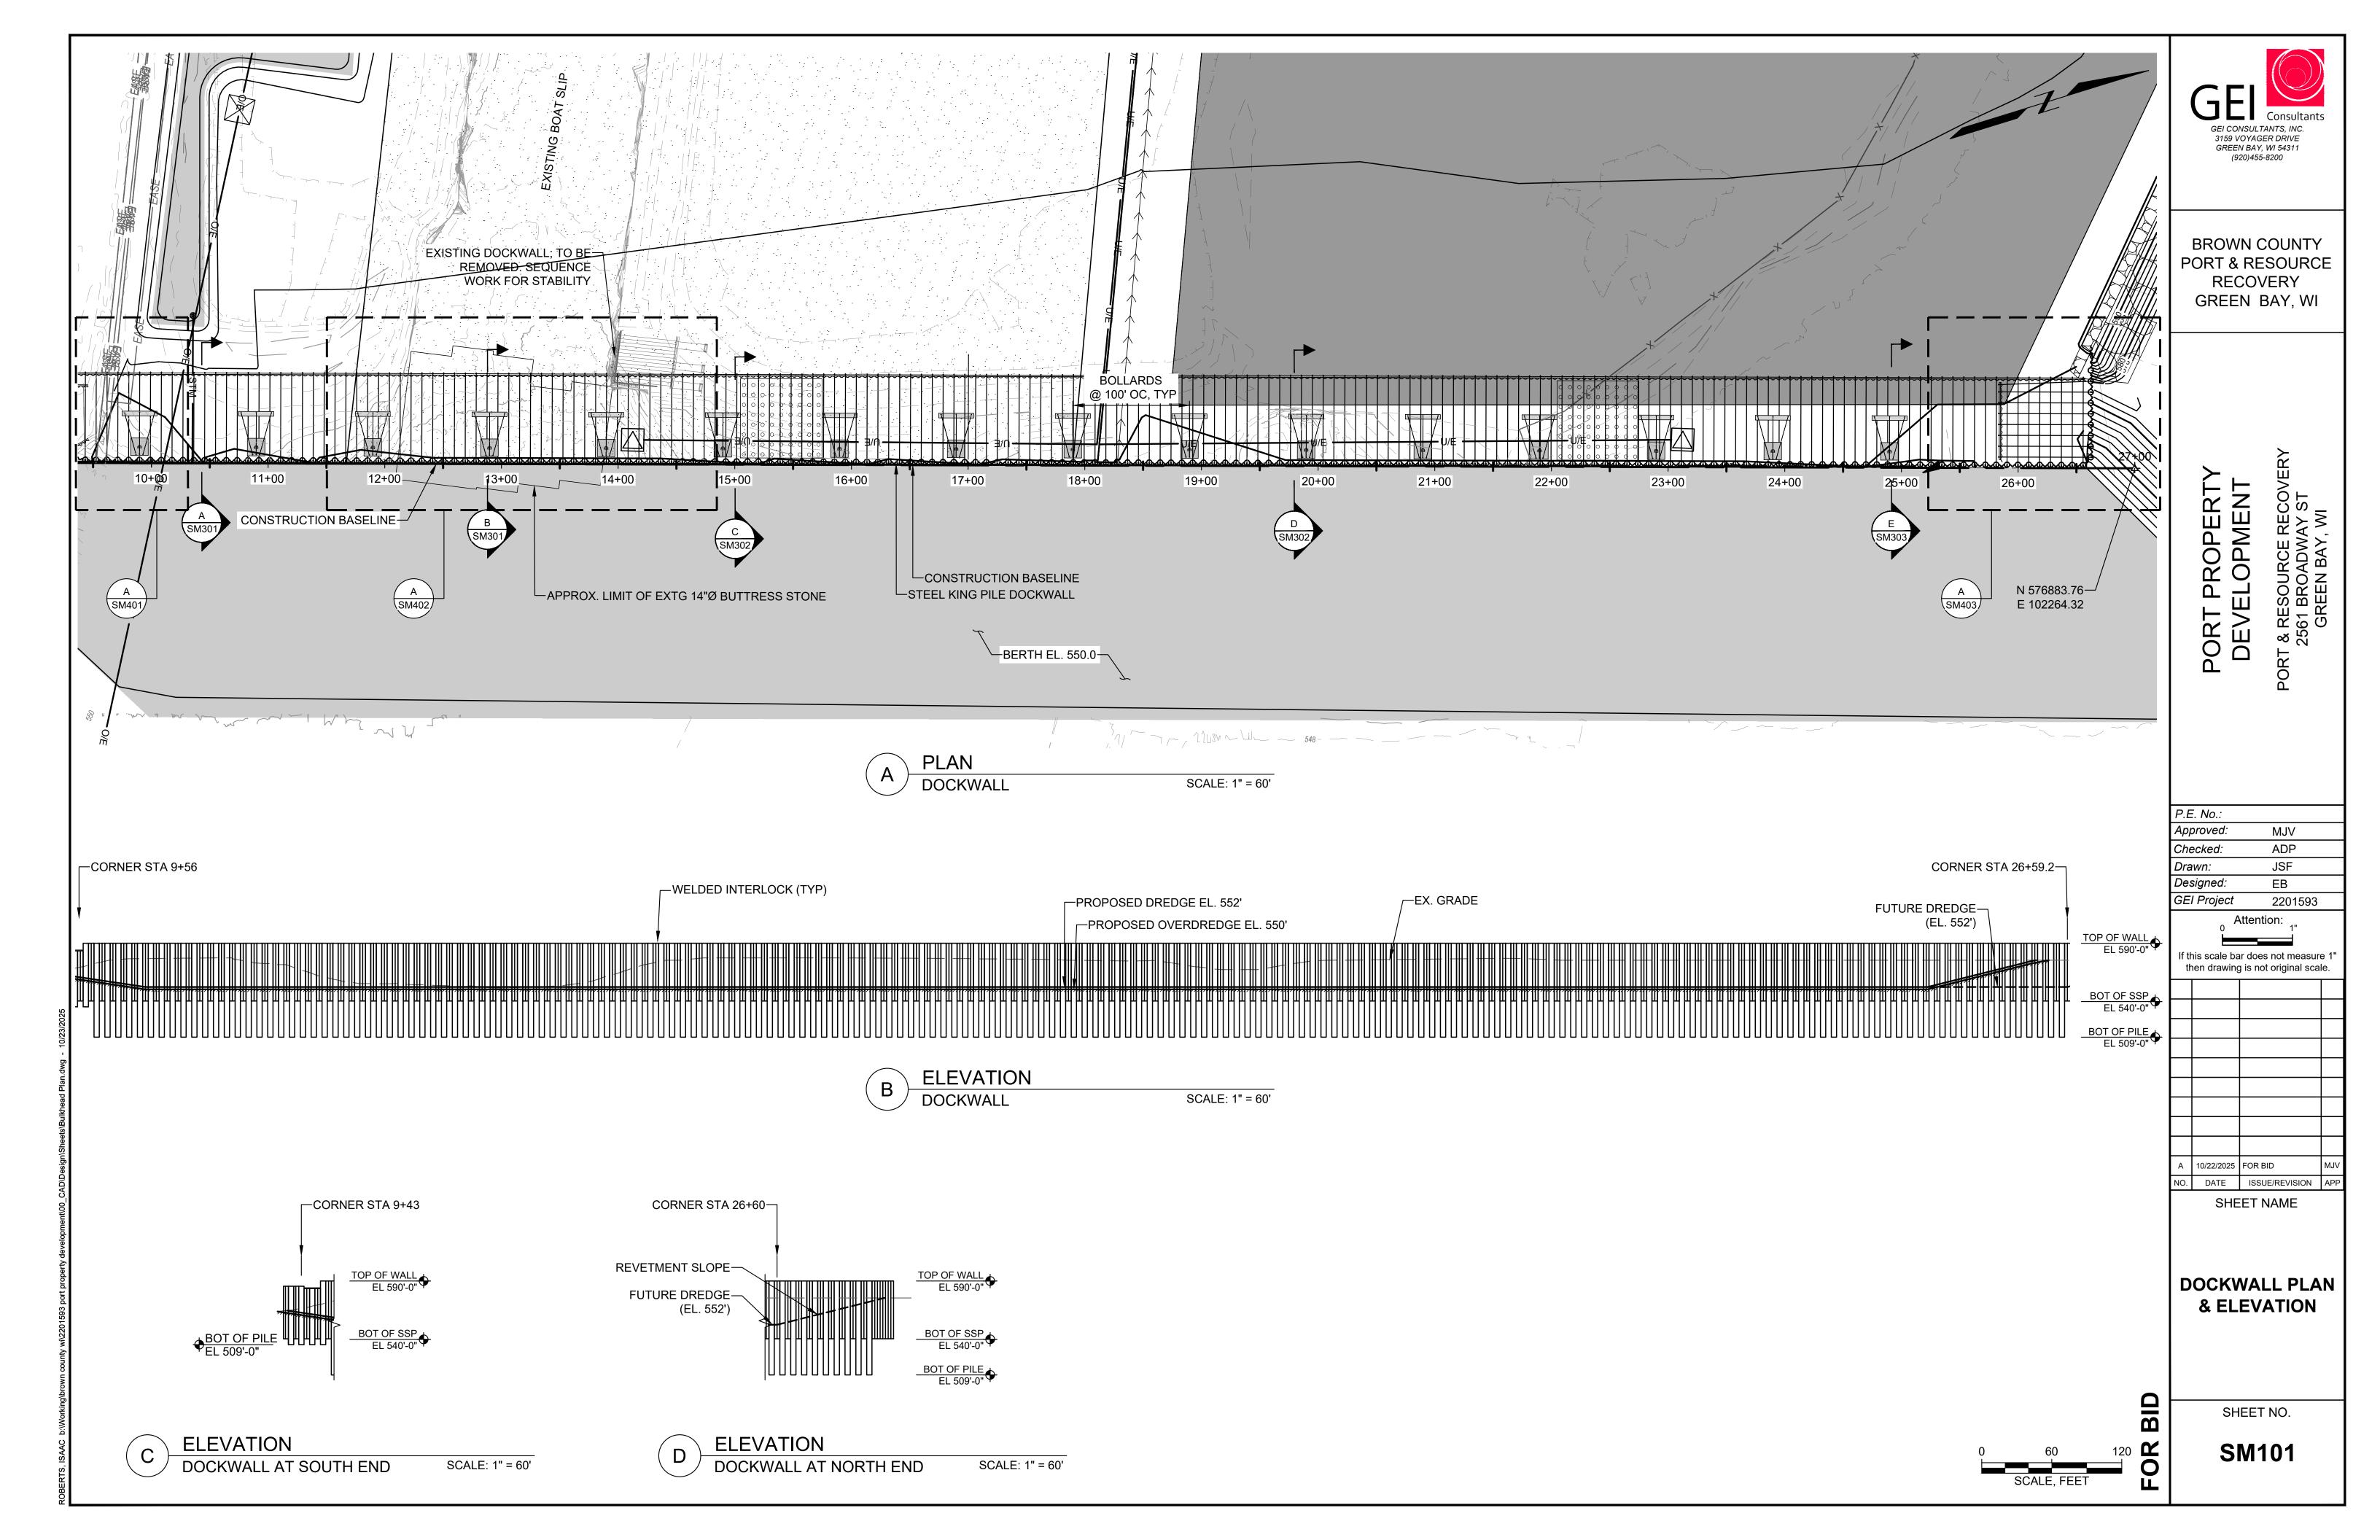

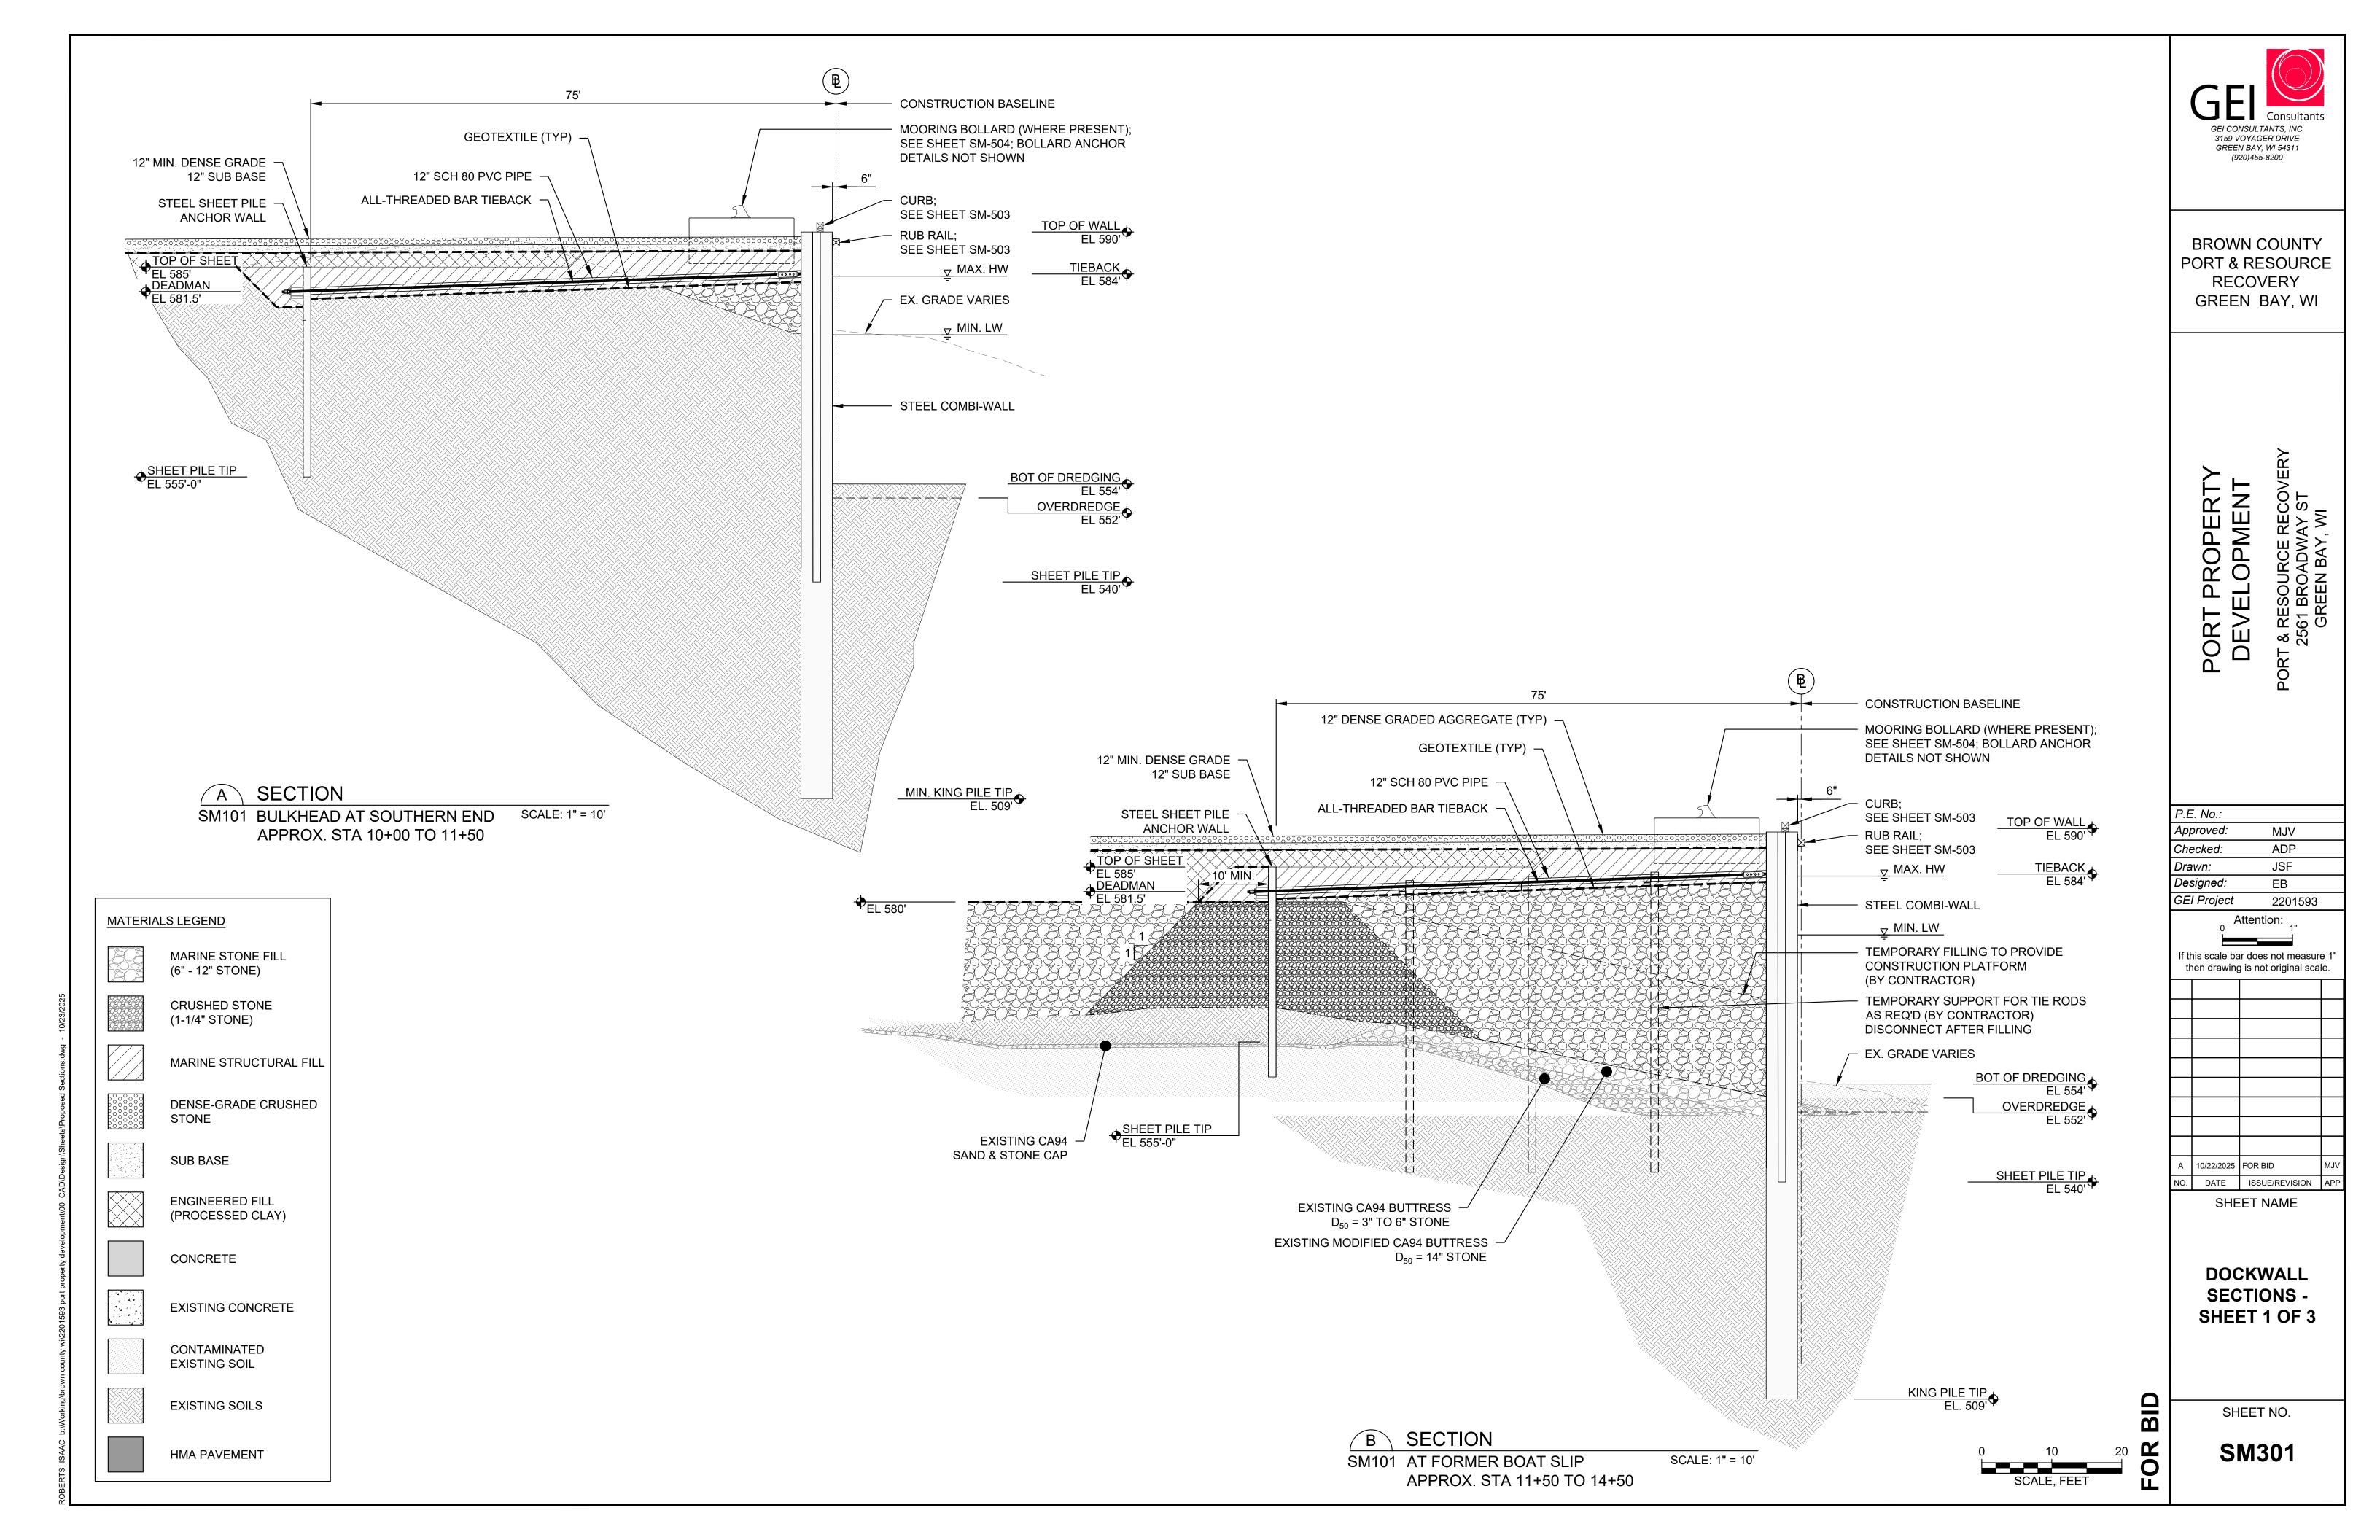

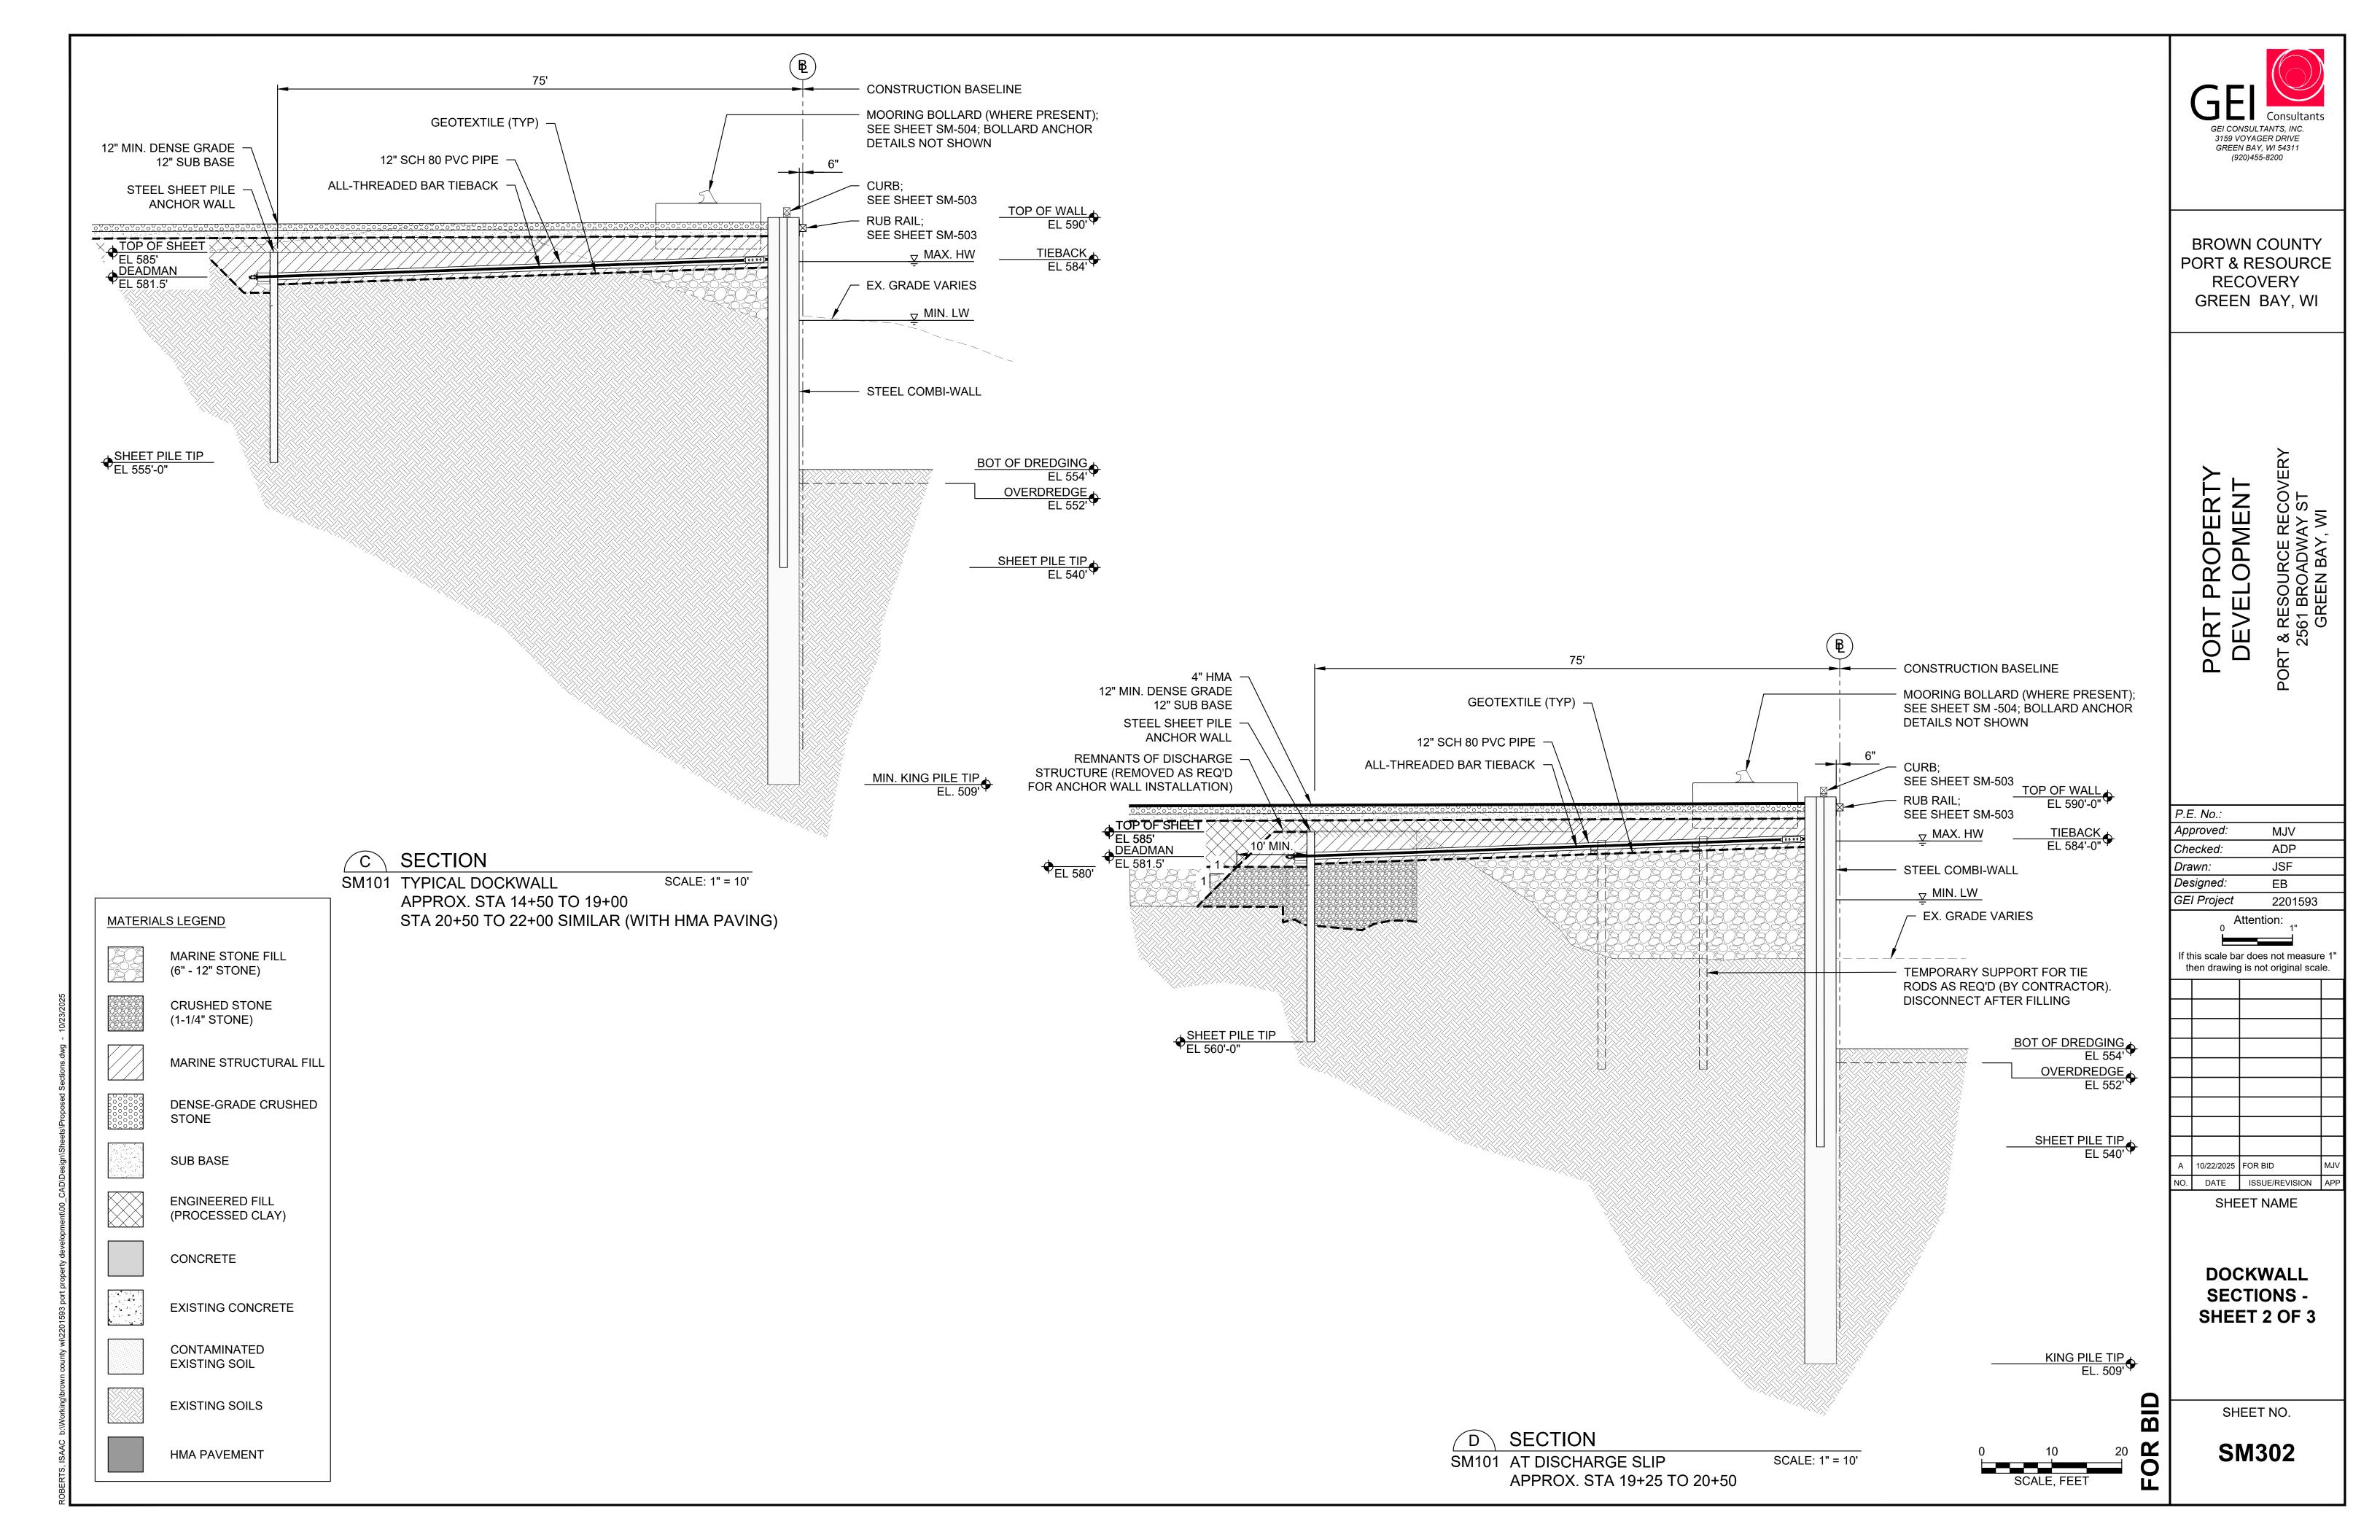

E SECTION

SM101 DOCKWALL IN OPEN WATER

APPROX. STA 22+00 TO 26+00

SCALE: 1" = 10'

MATERIALS LEGEND

MARINE STONE FILL (6" - 12" STONE)

CRUSHED STONE (1-1/4" STONE)



MARINE STRUCTURAL FILL



DENSE-GRADE CRUSHED STONE



SUB BASE



ENGINEERED FILL (PROCESSED CLAY)



CONCRETE



EXISTING CONCRETE



CONTAMINATED **EXISTING SOIL**



EXISTING SOILS

HMA PAVEMENT



SCALE, FEET



BROWN COUNTY PORT & RESOURCE RECOVERY GREEN BAY, WI

> PORT PROPERTY DEVELOPMENT **PORT**

P.E. No.:	
Approved:	MJV
Checked:	ADP
Drawn:	JSF
Designed:	EB
GEI Project	2201593


Attention: If this scale bar does not measure 1 then drawing is not original scale.


Α	10/22/2025	FOR BID	М
NO.	DATE	ISSUE/REVISION	AF
SHEET NAME			


SHEET INVINE


DOCKWALL SECTIONS -SHEET 3 OF 3


SHEET NO.

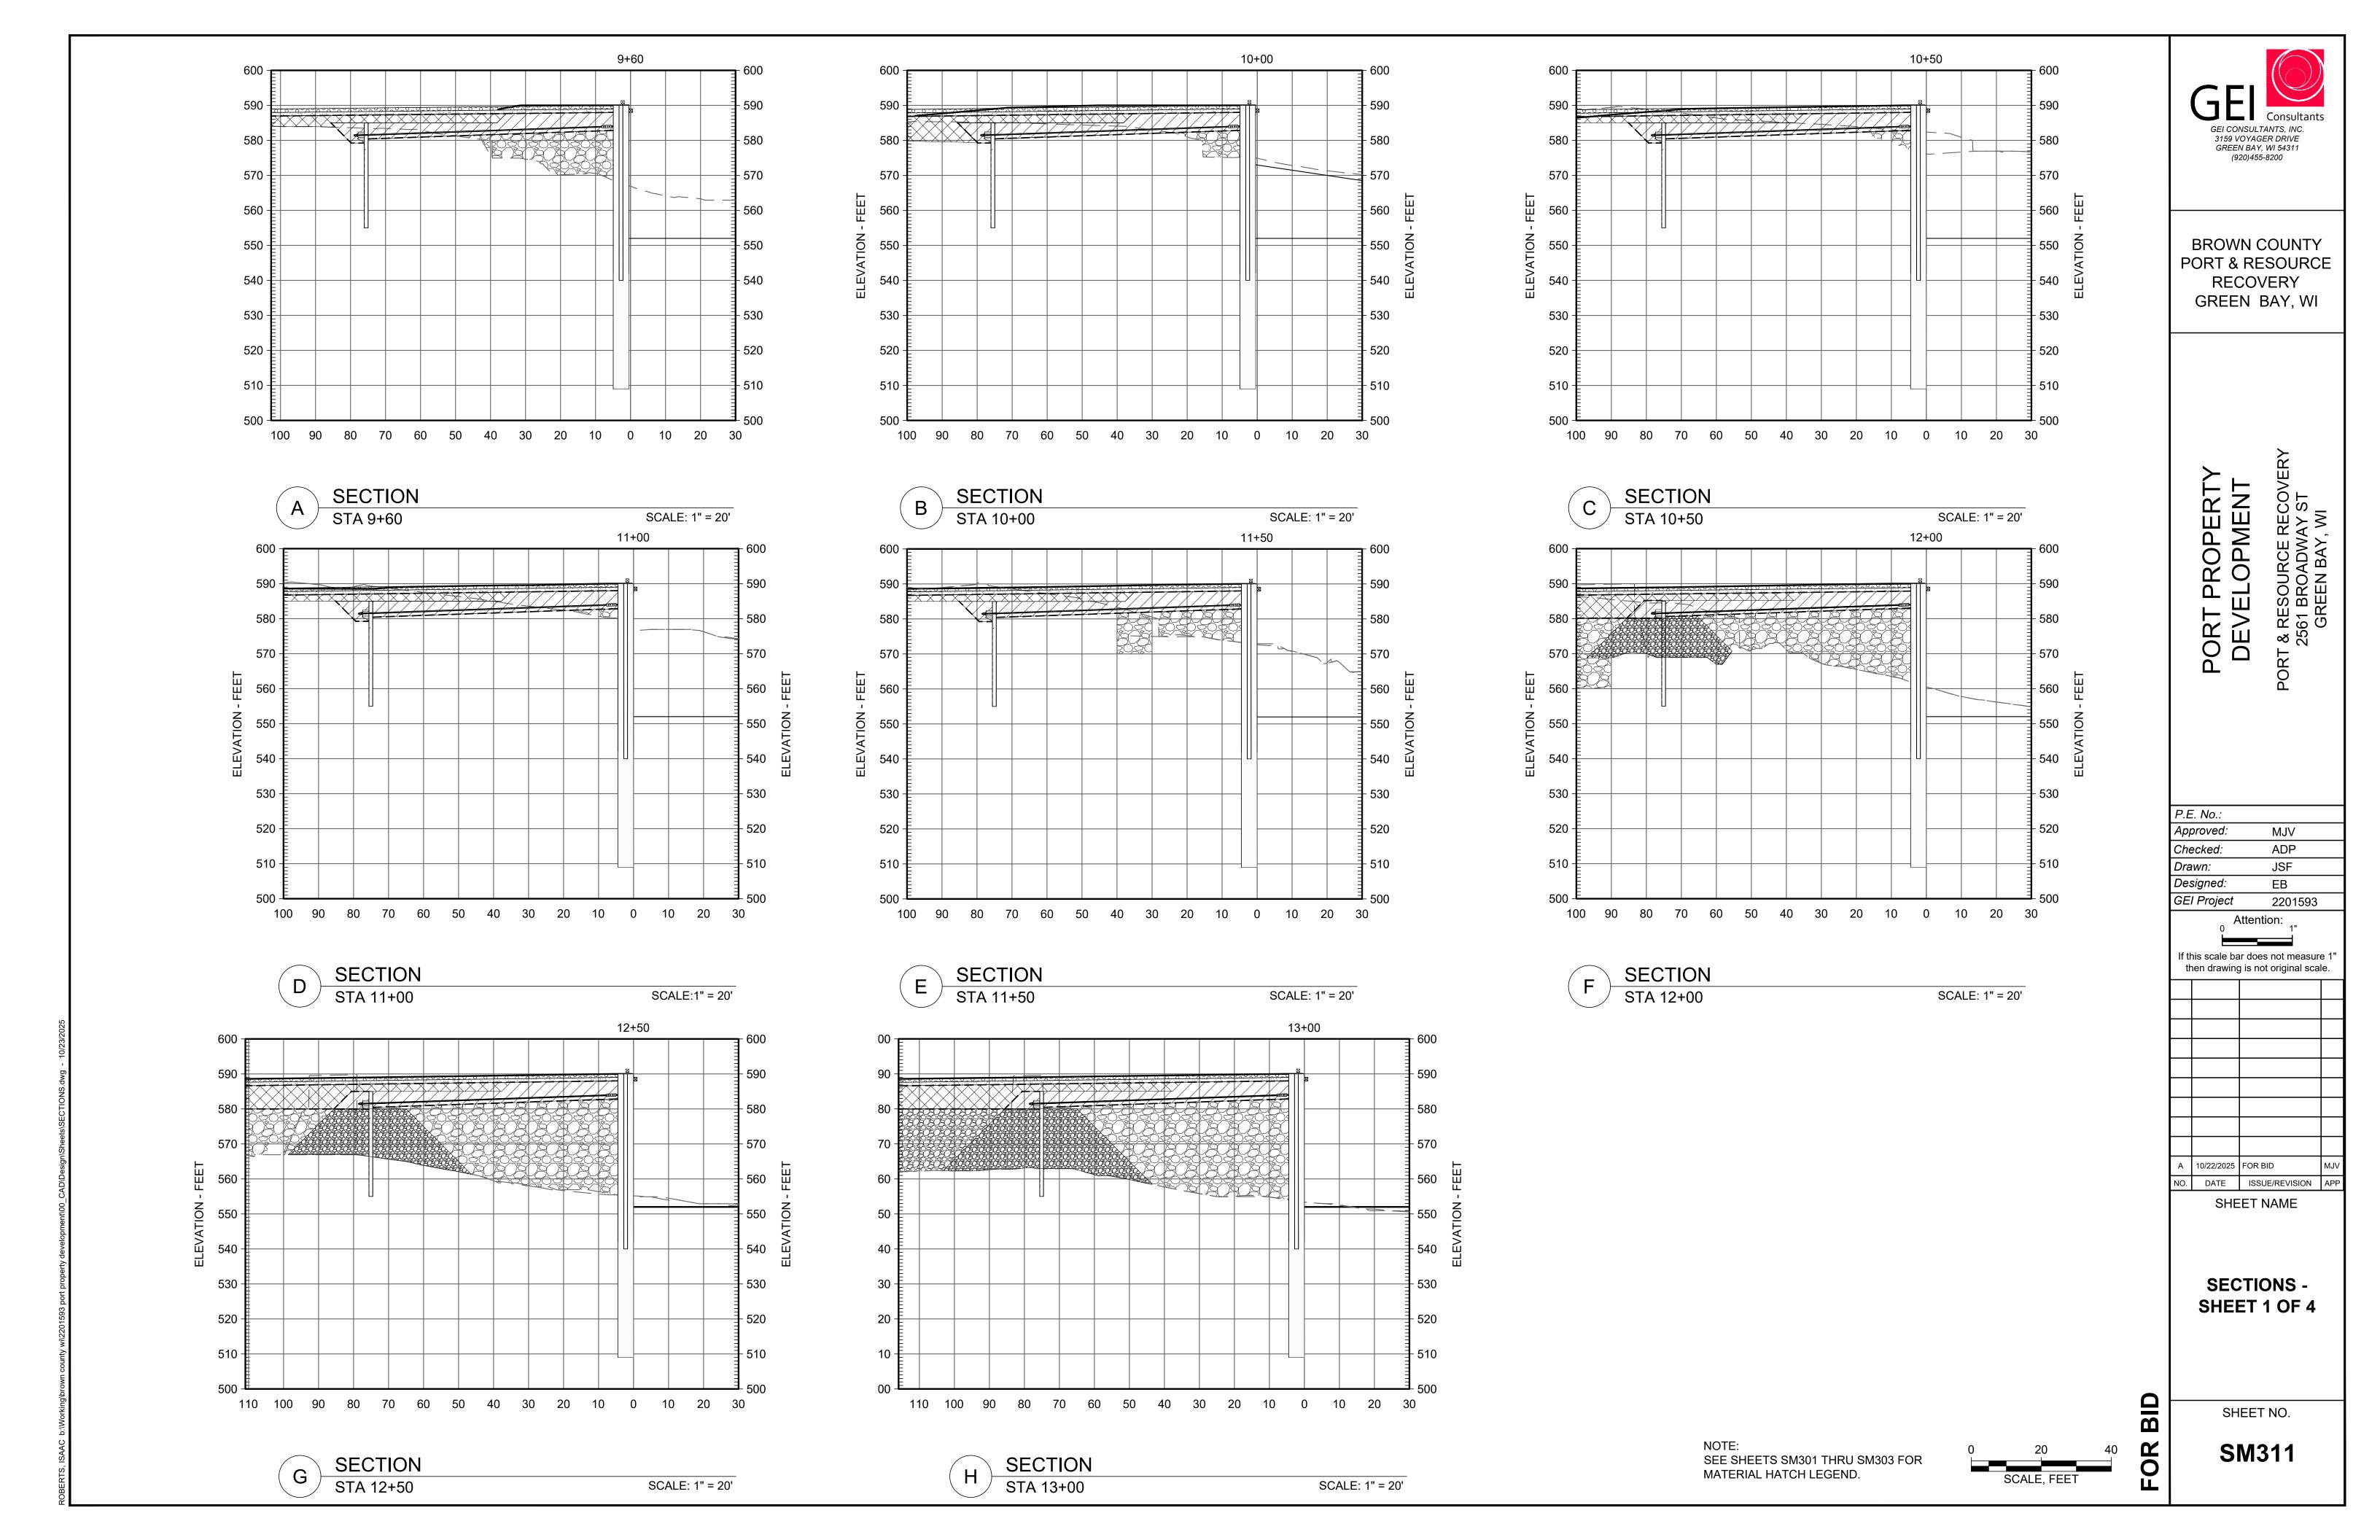


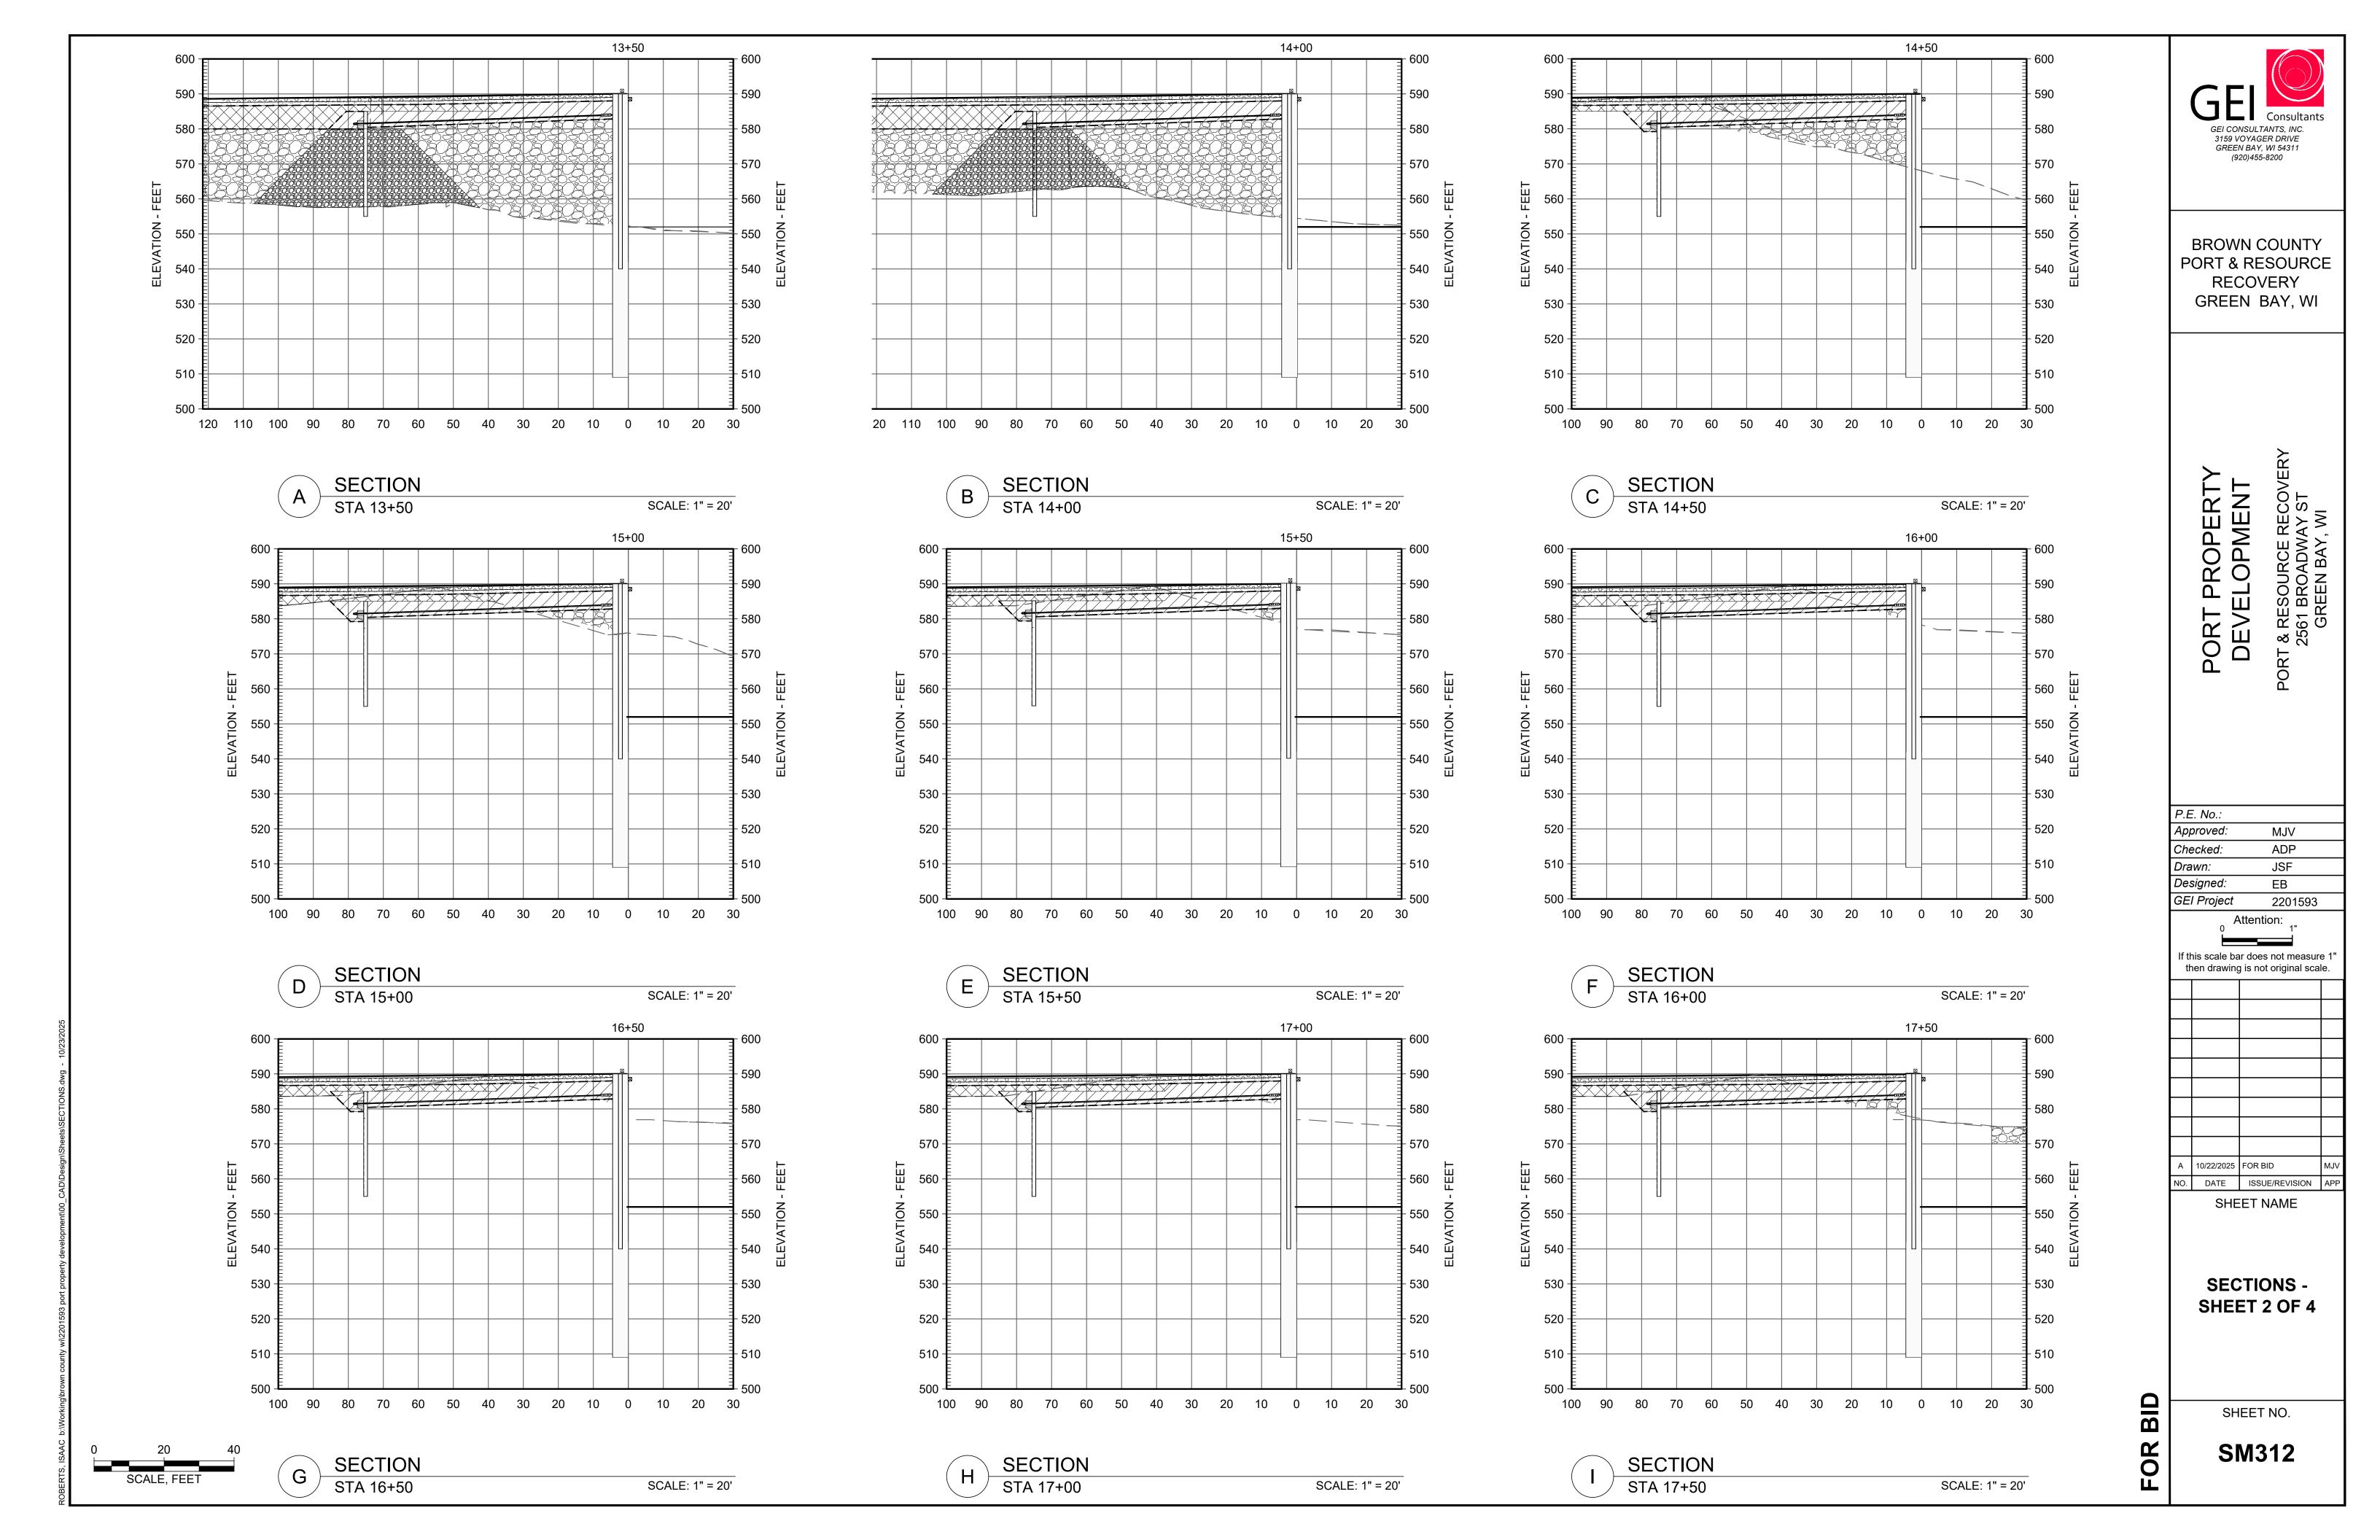


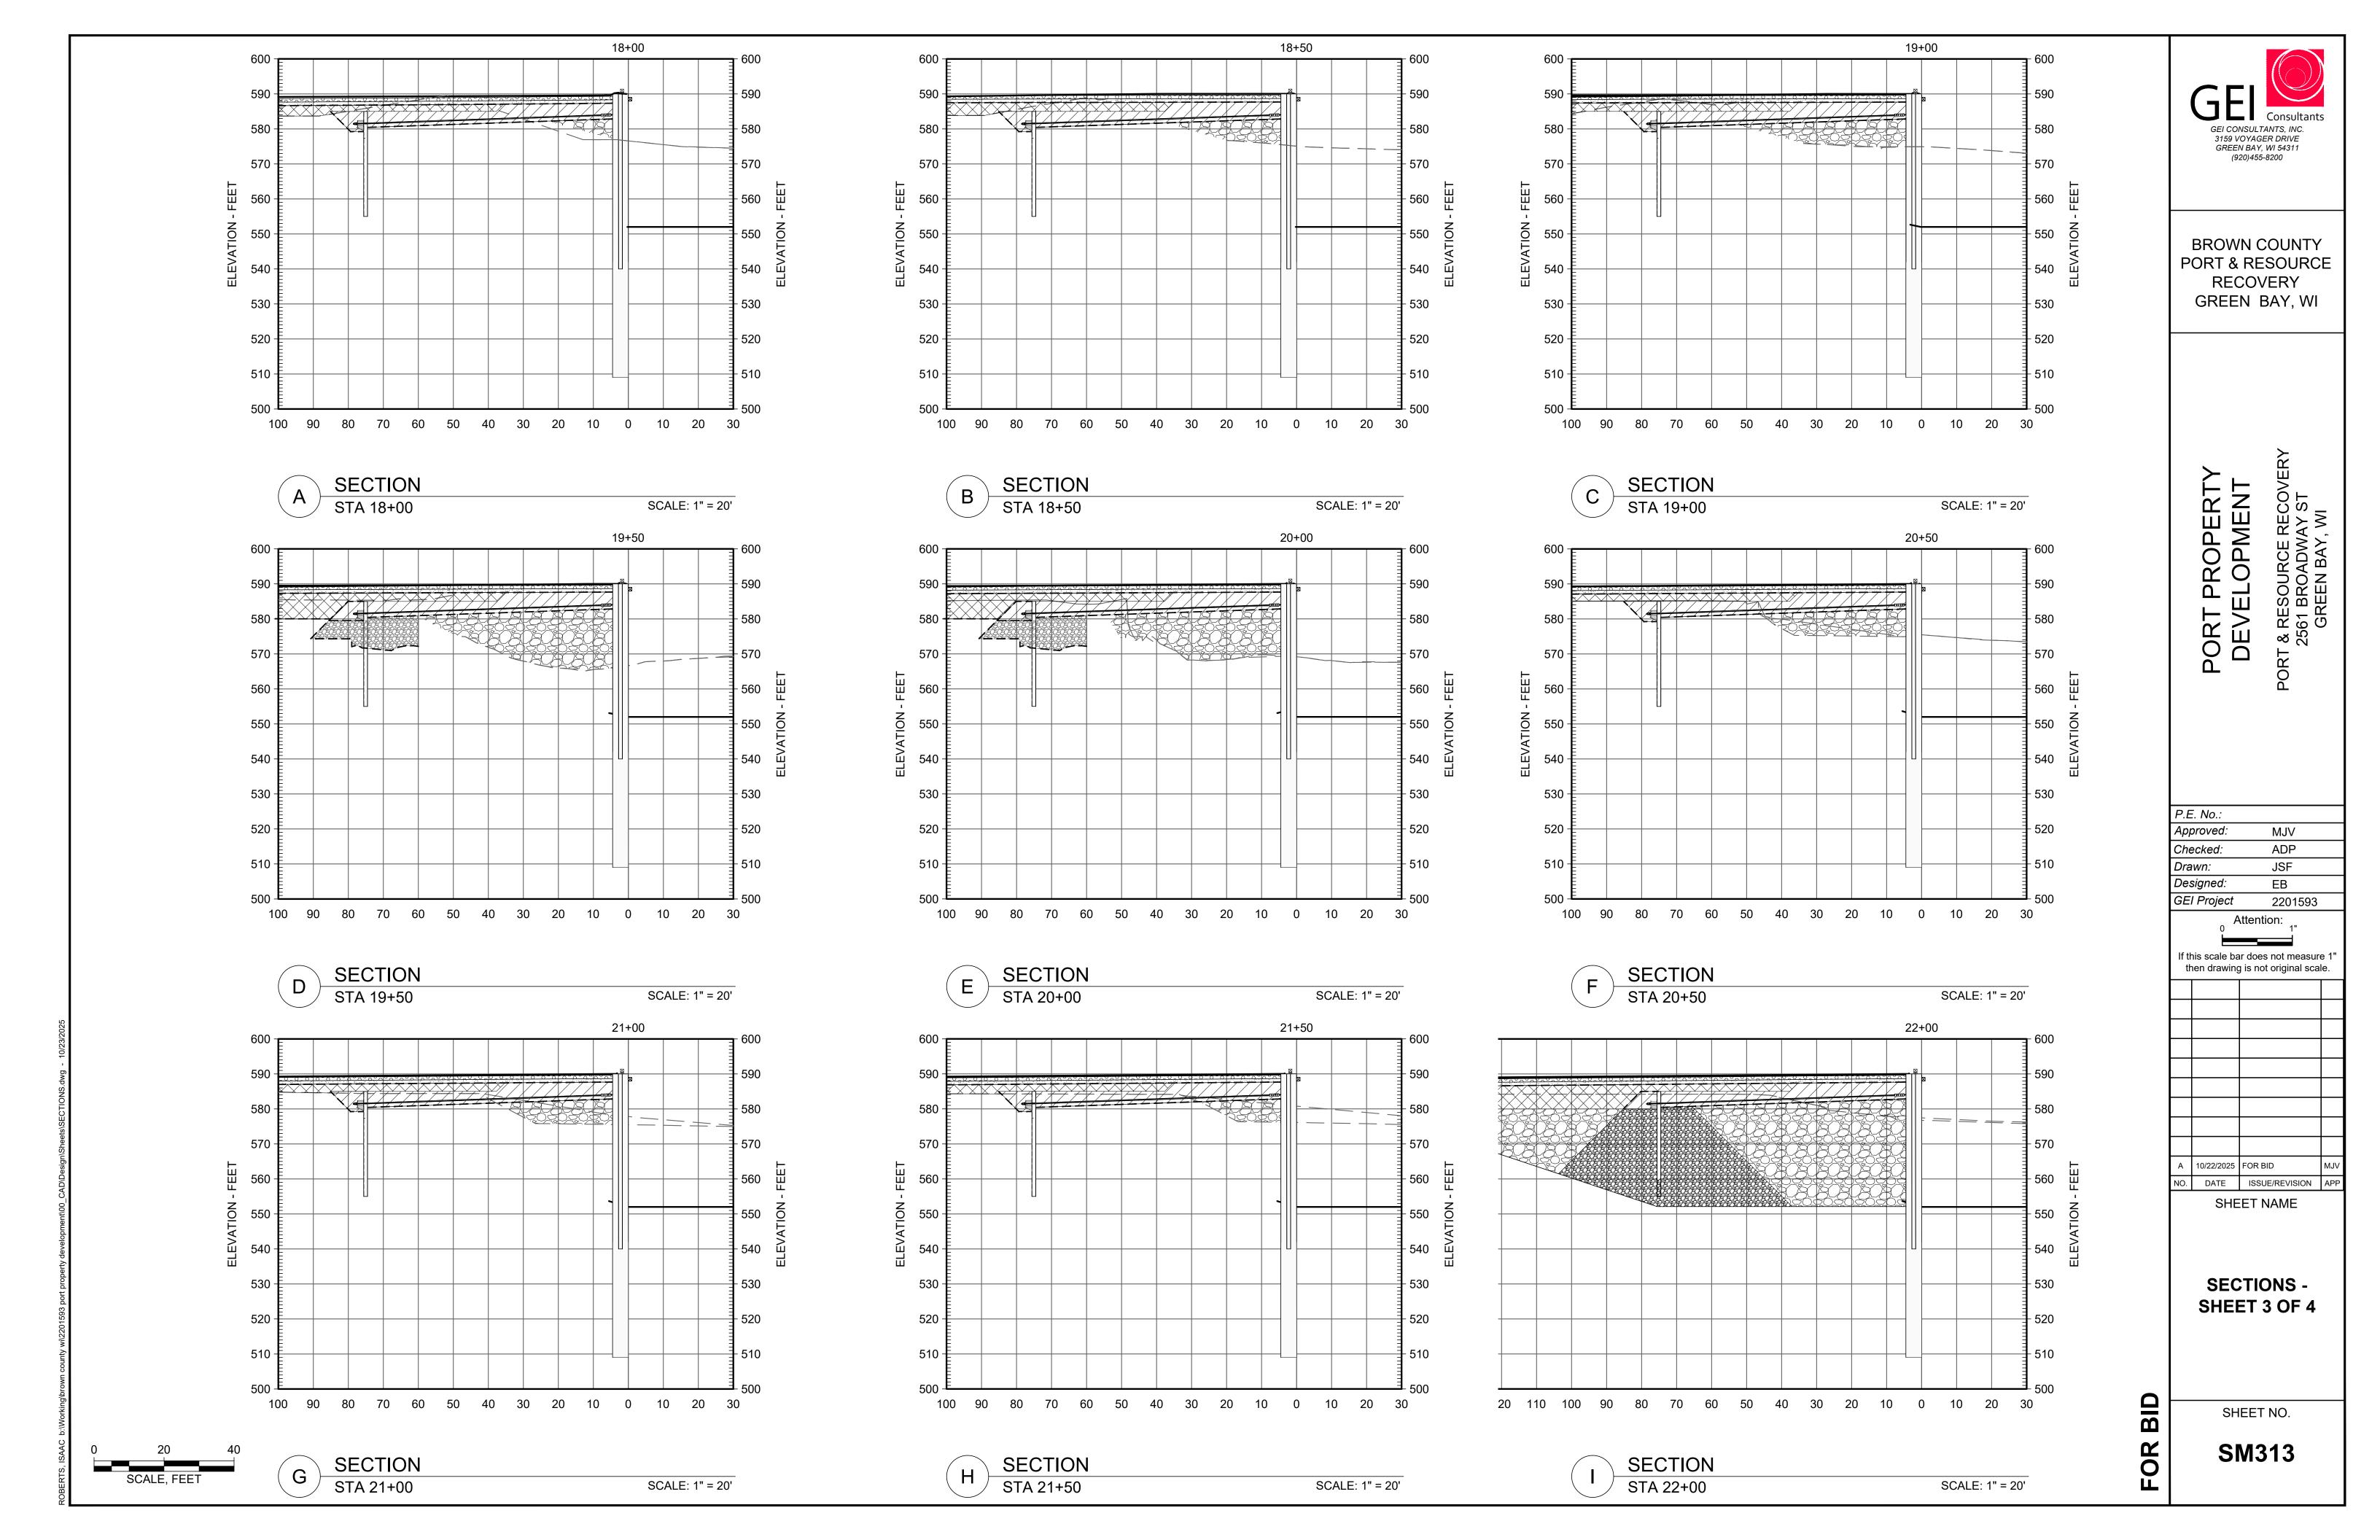


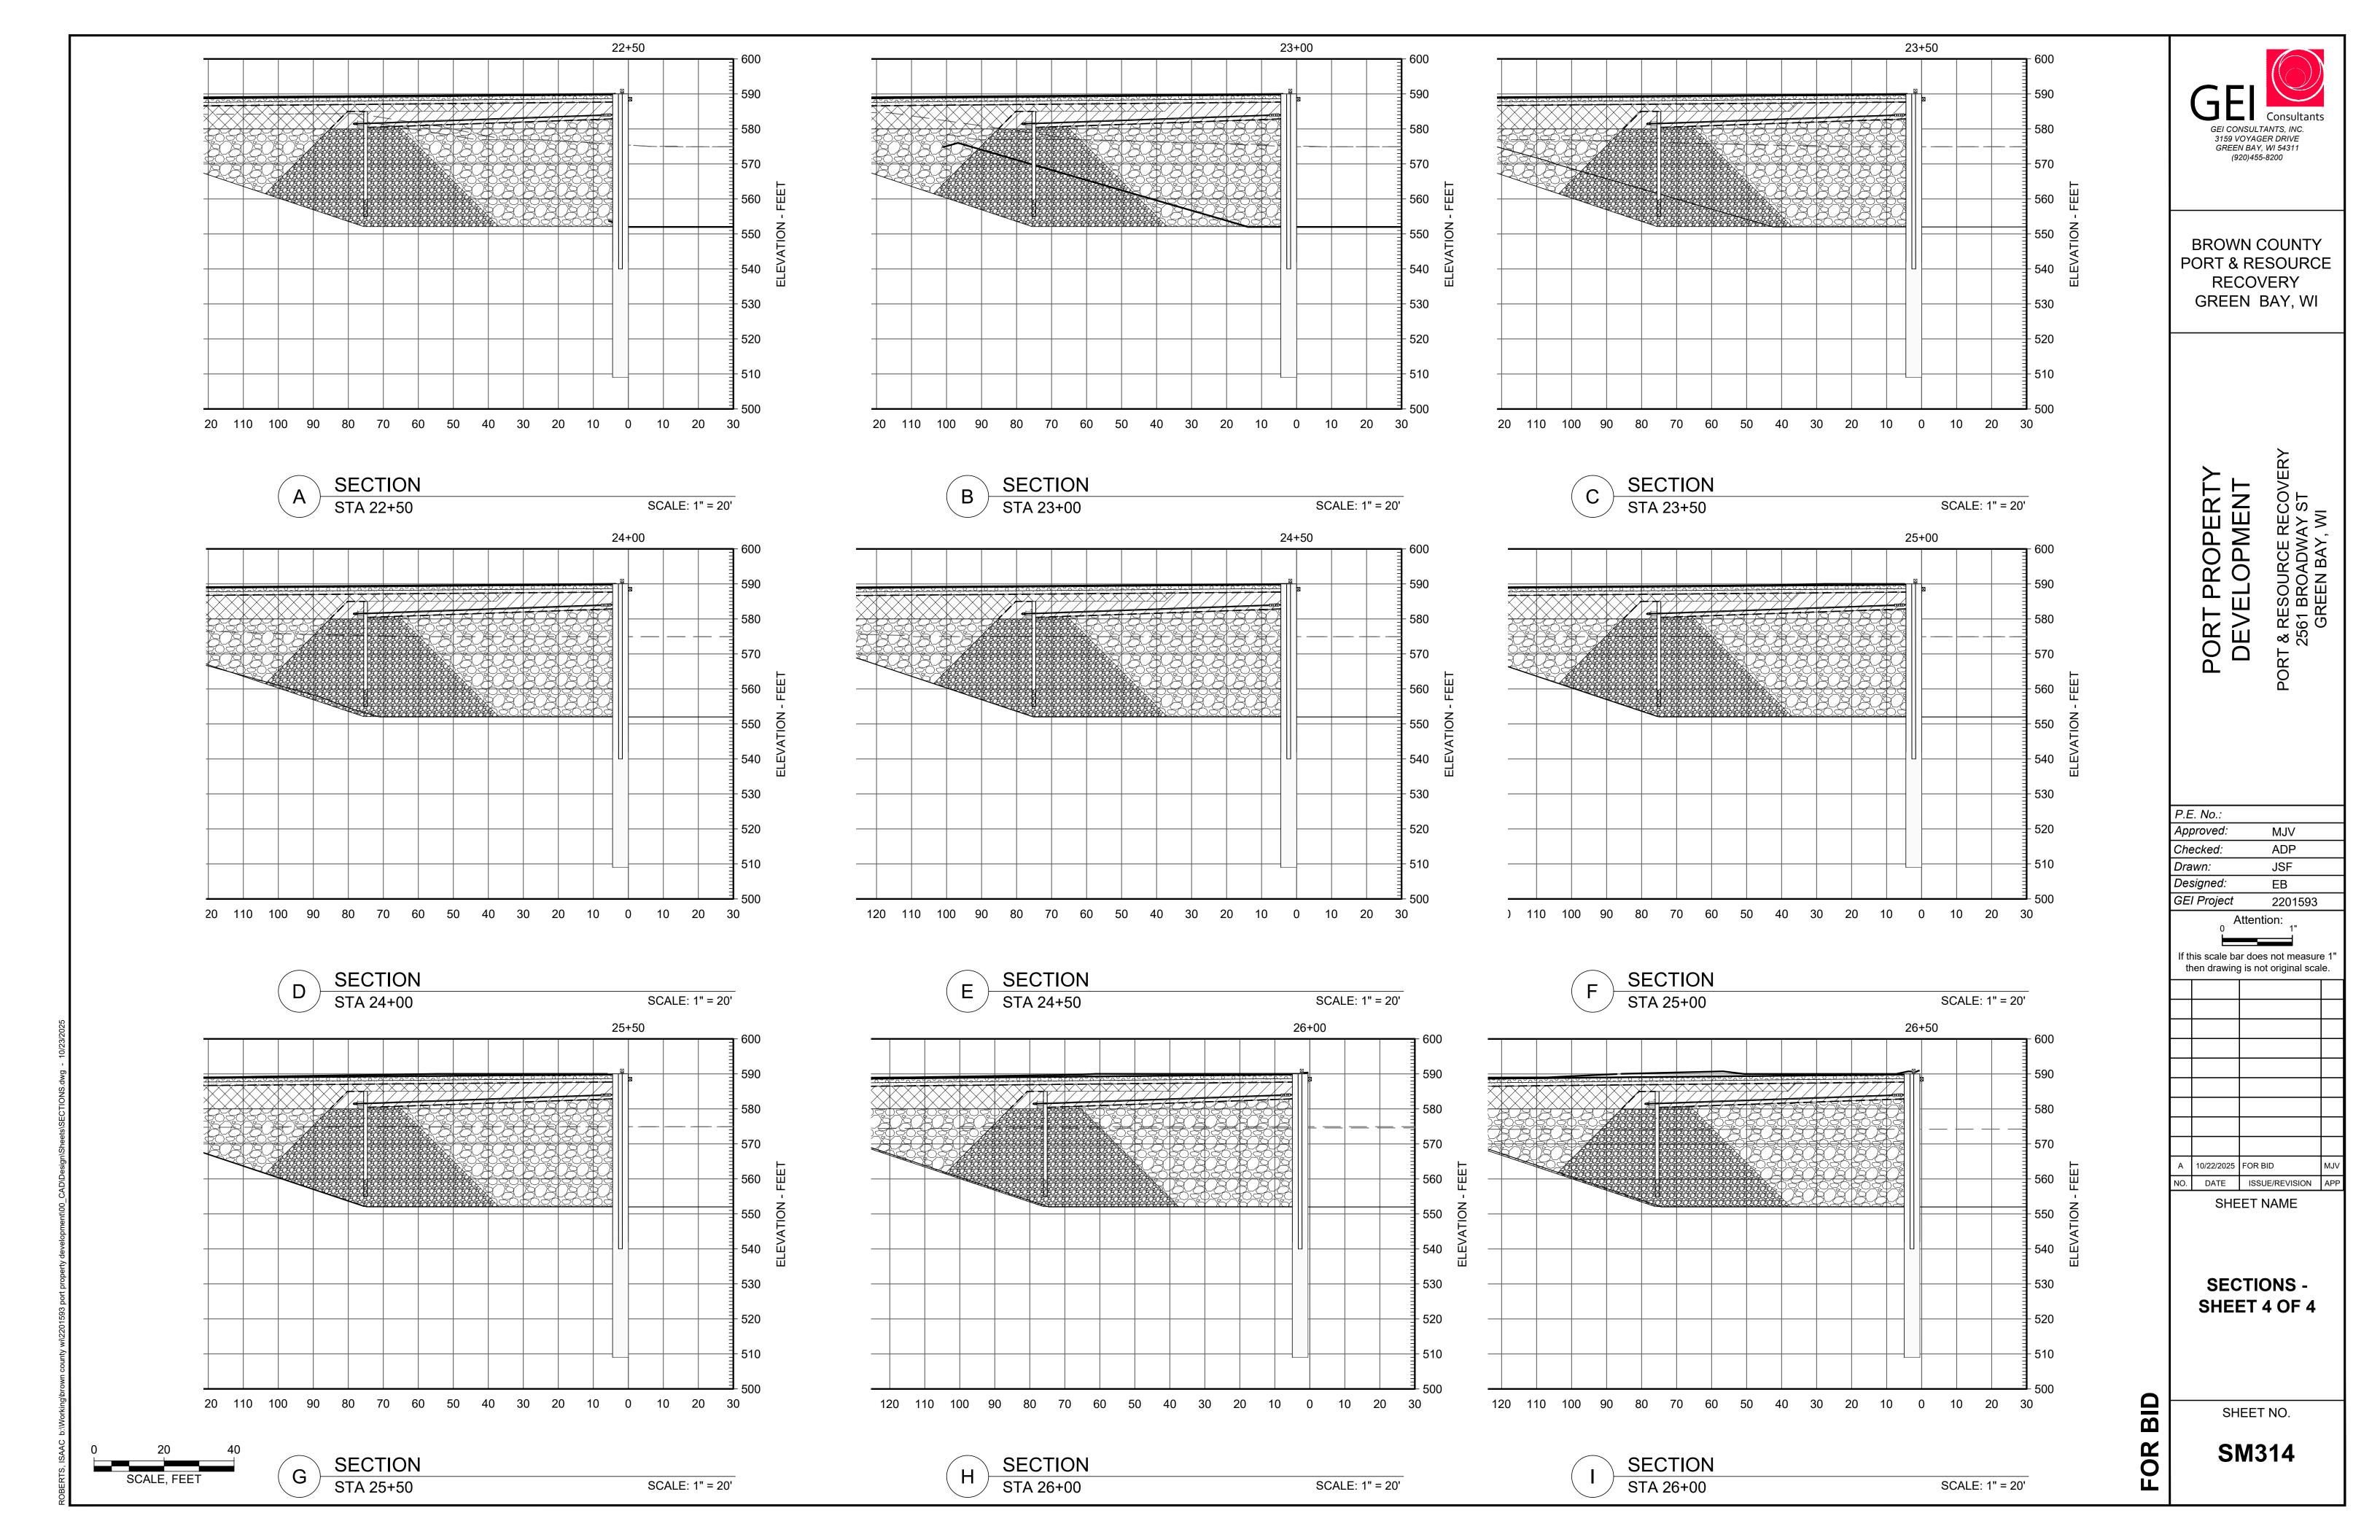


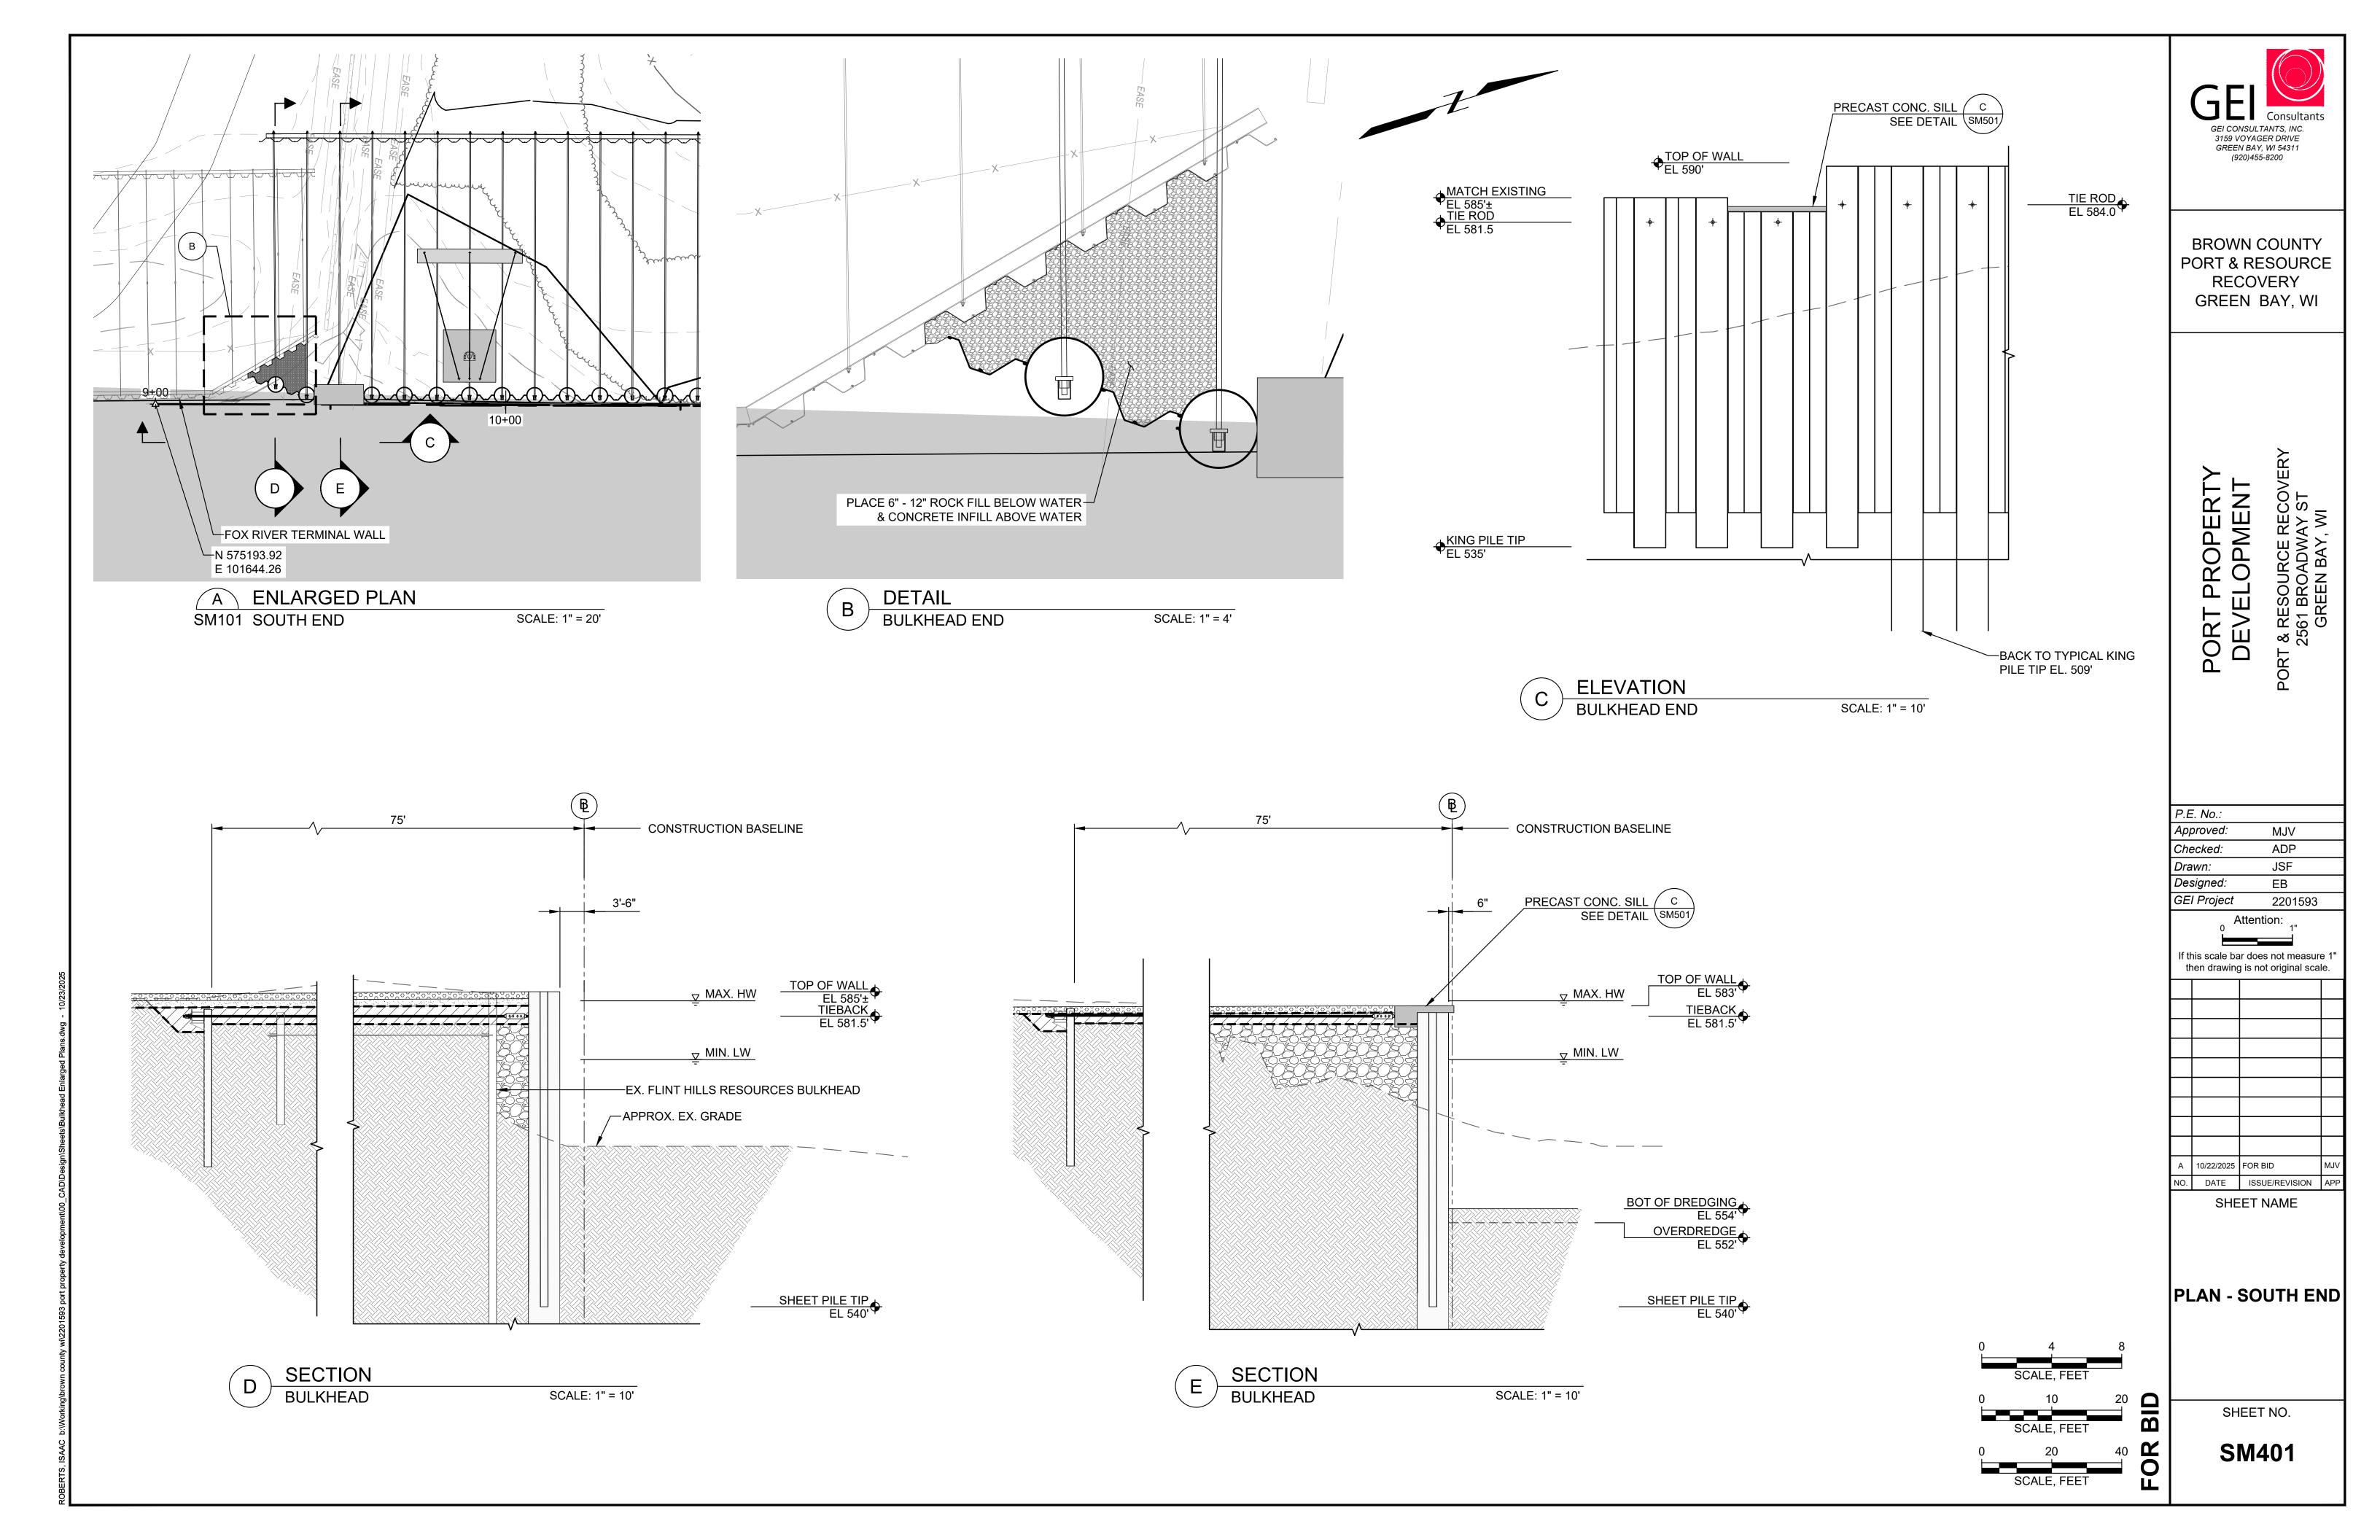

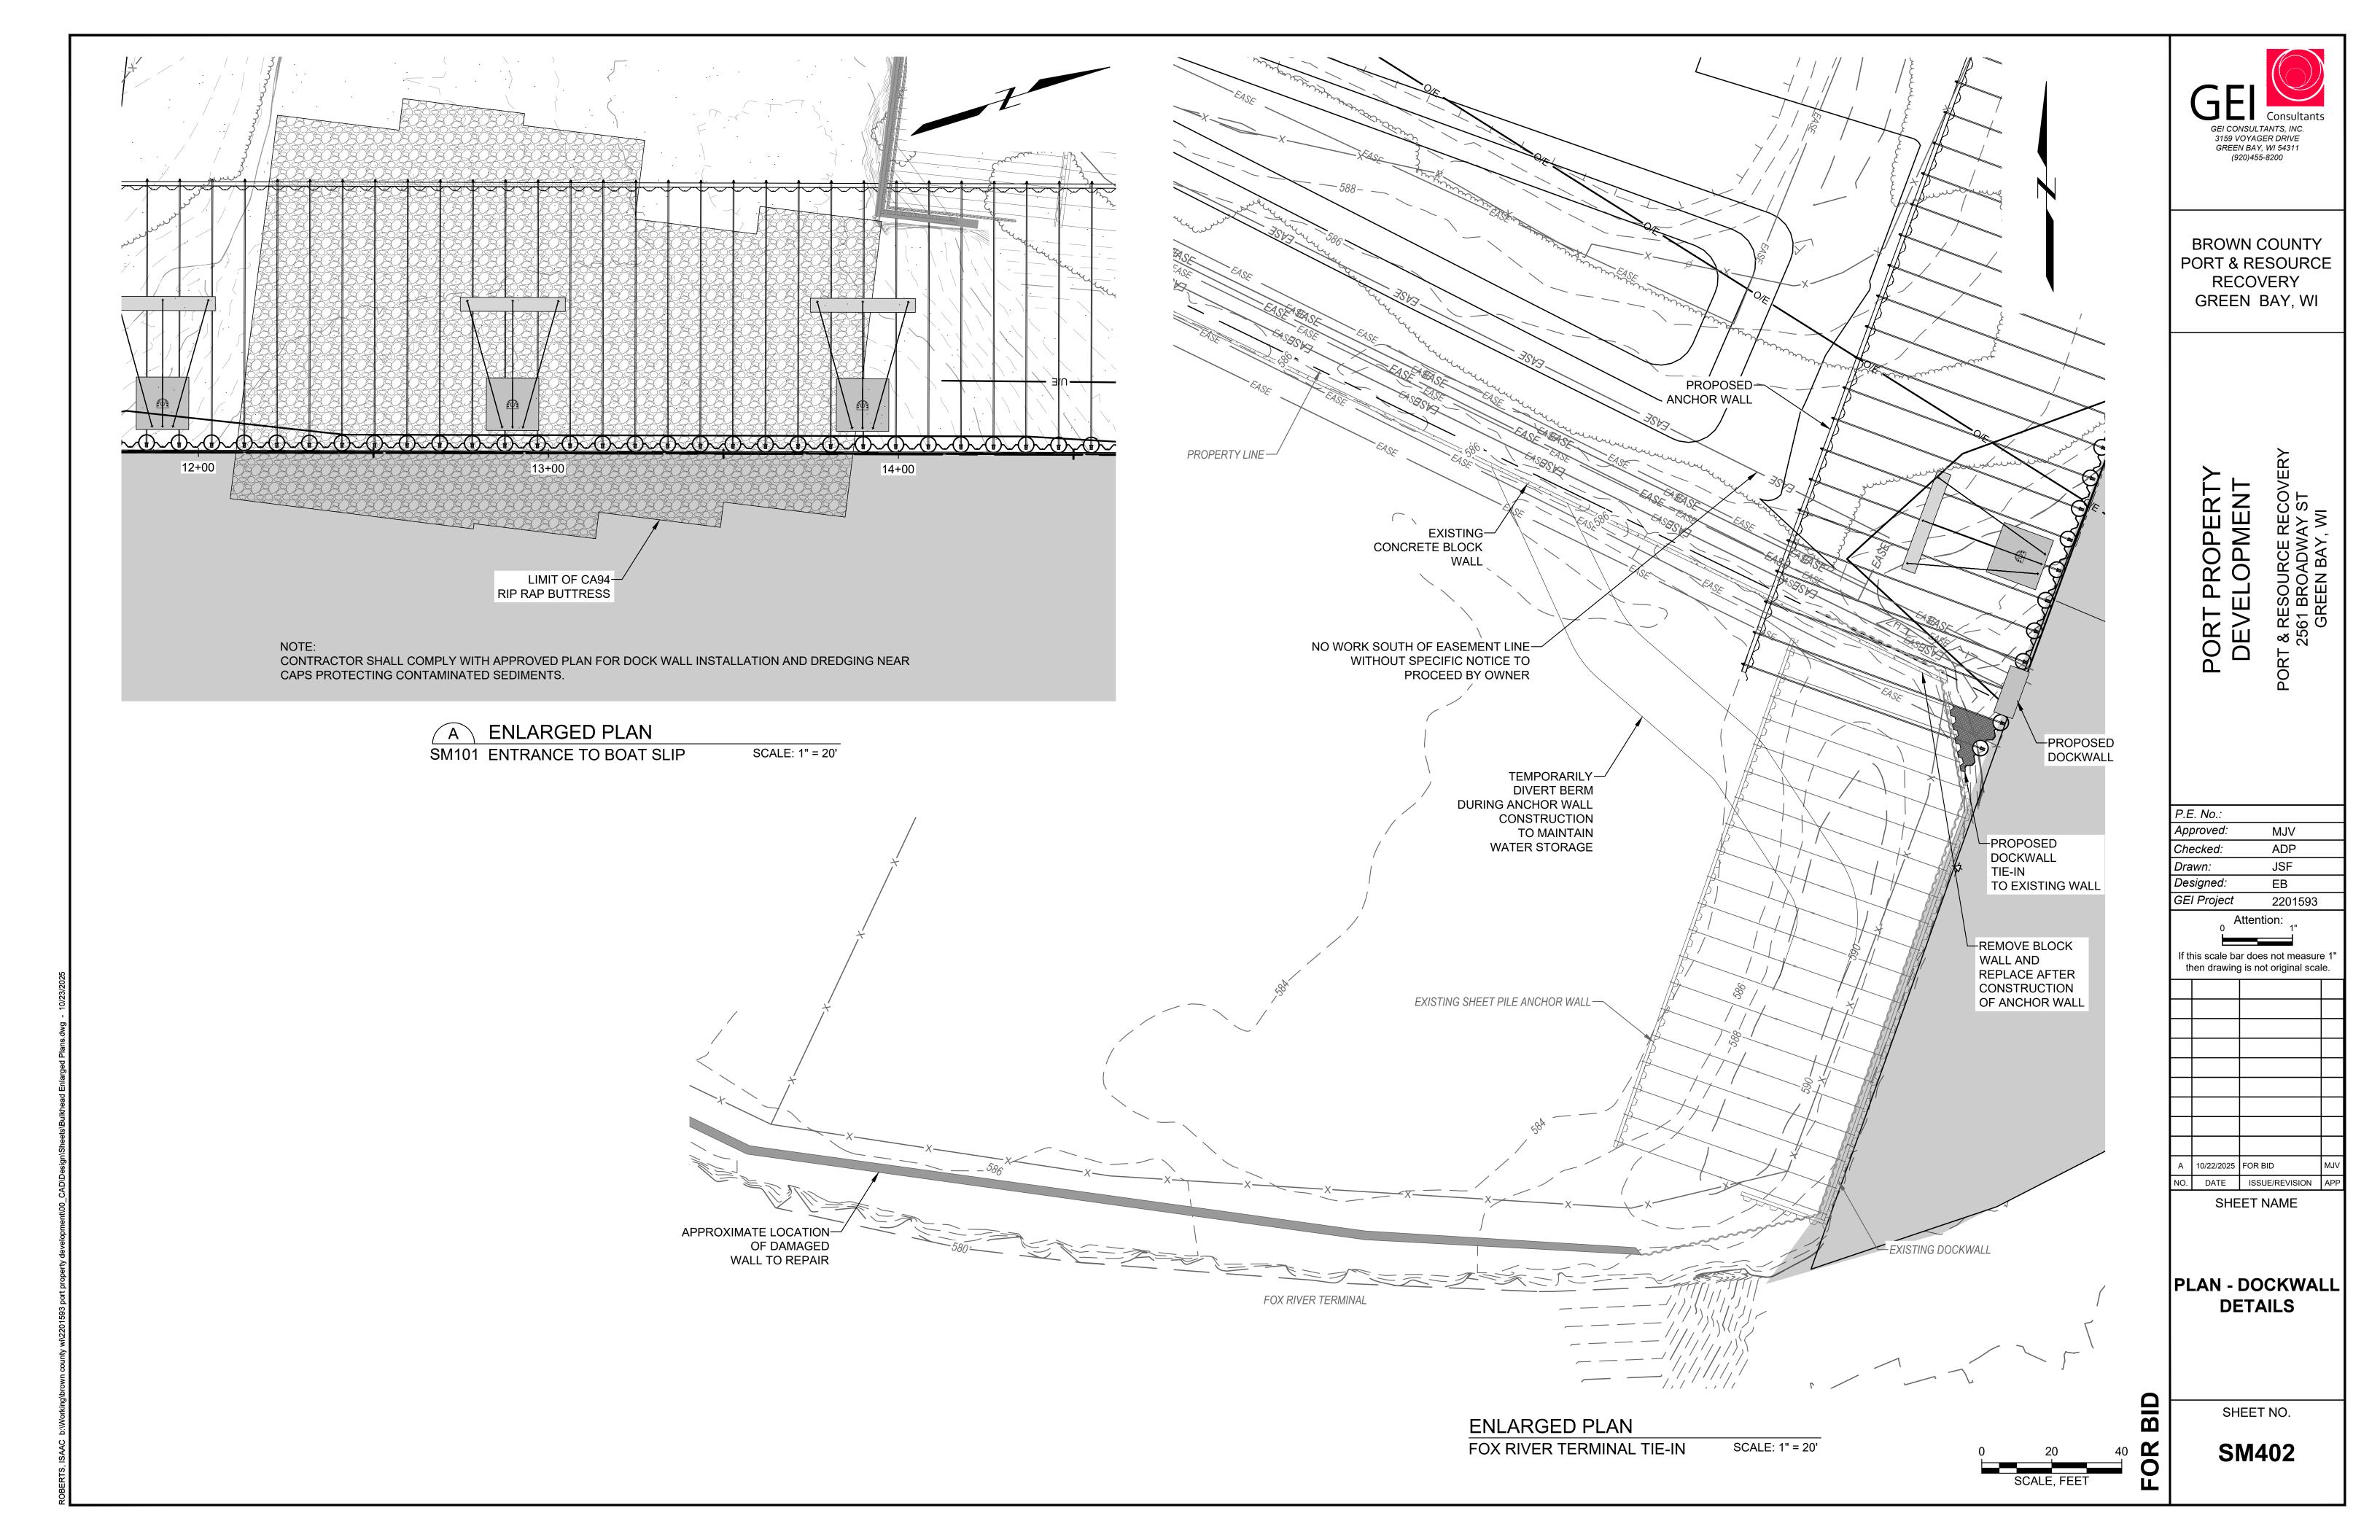

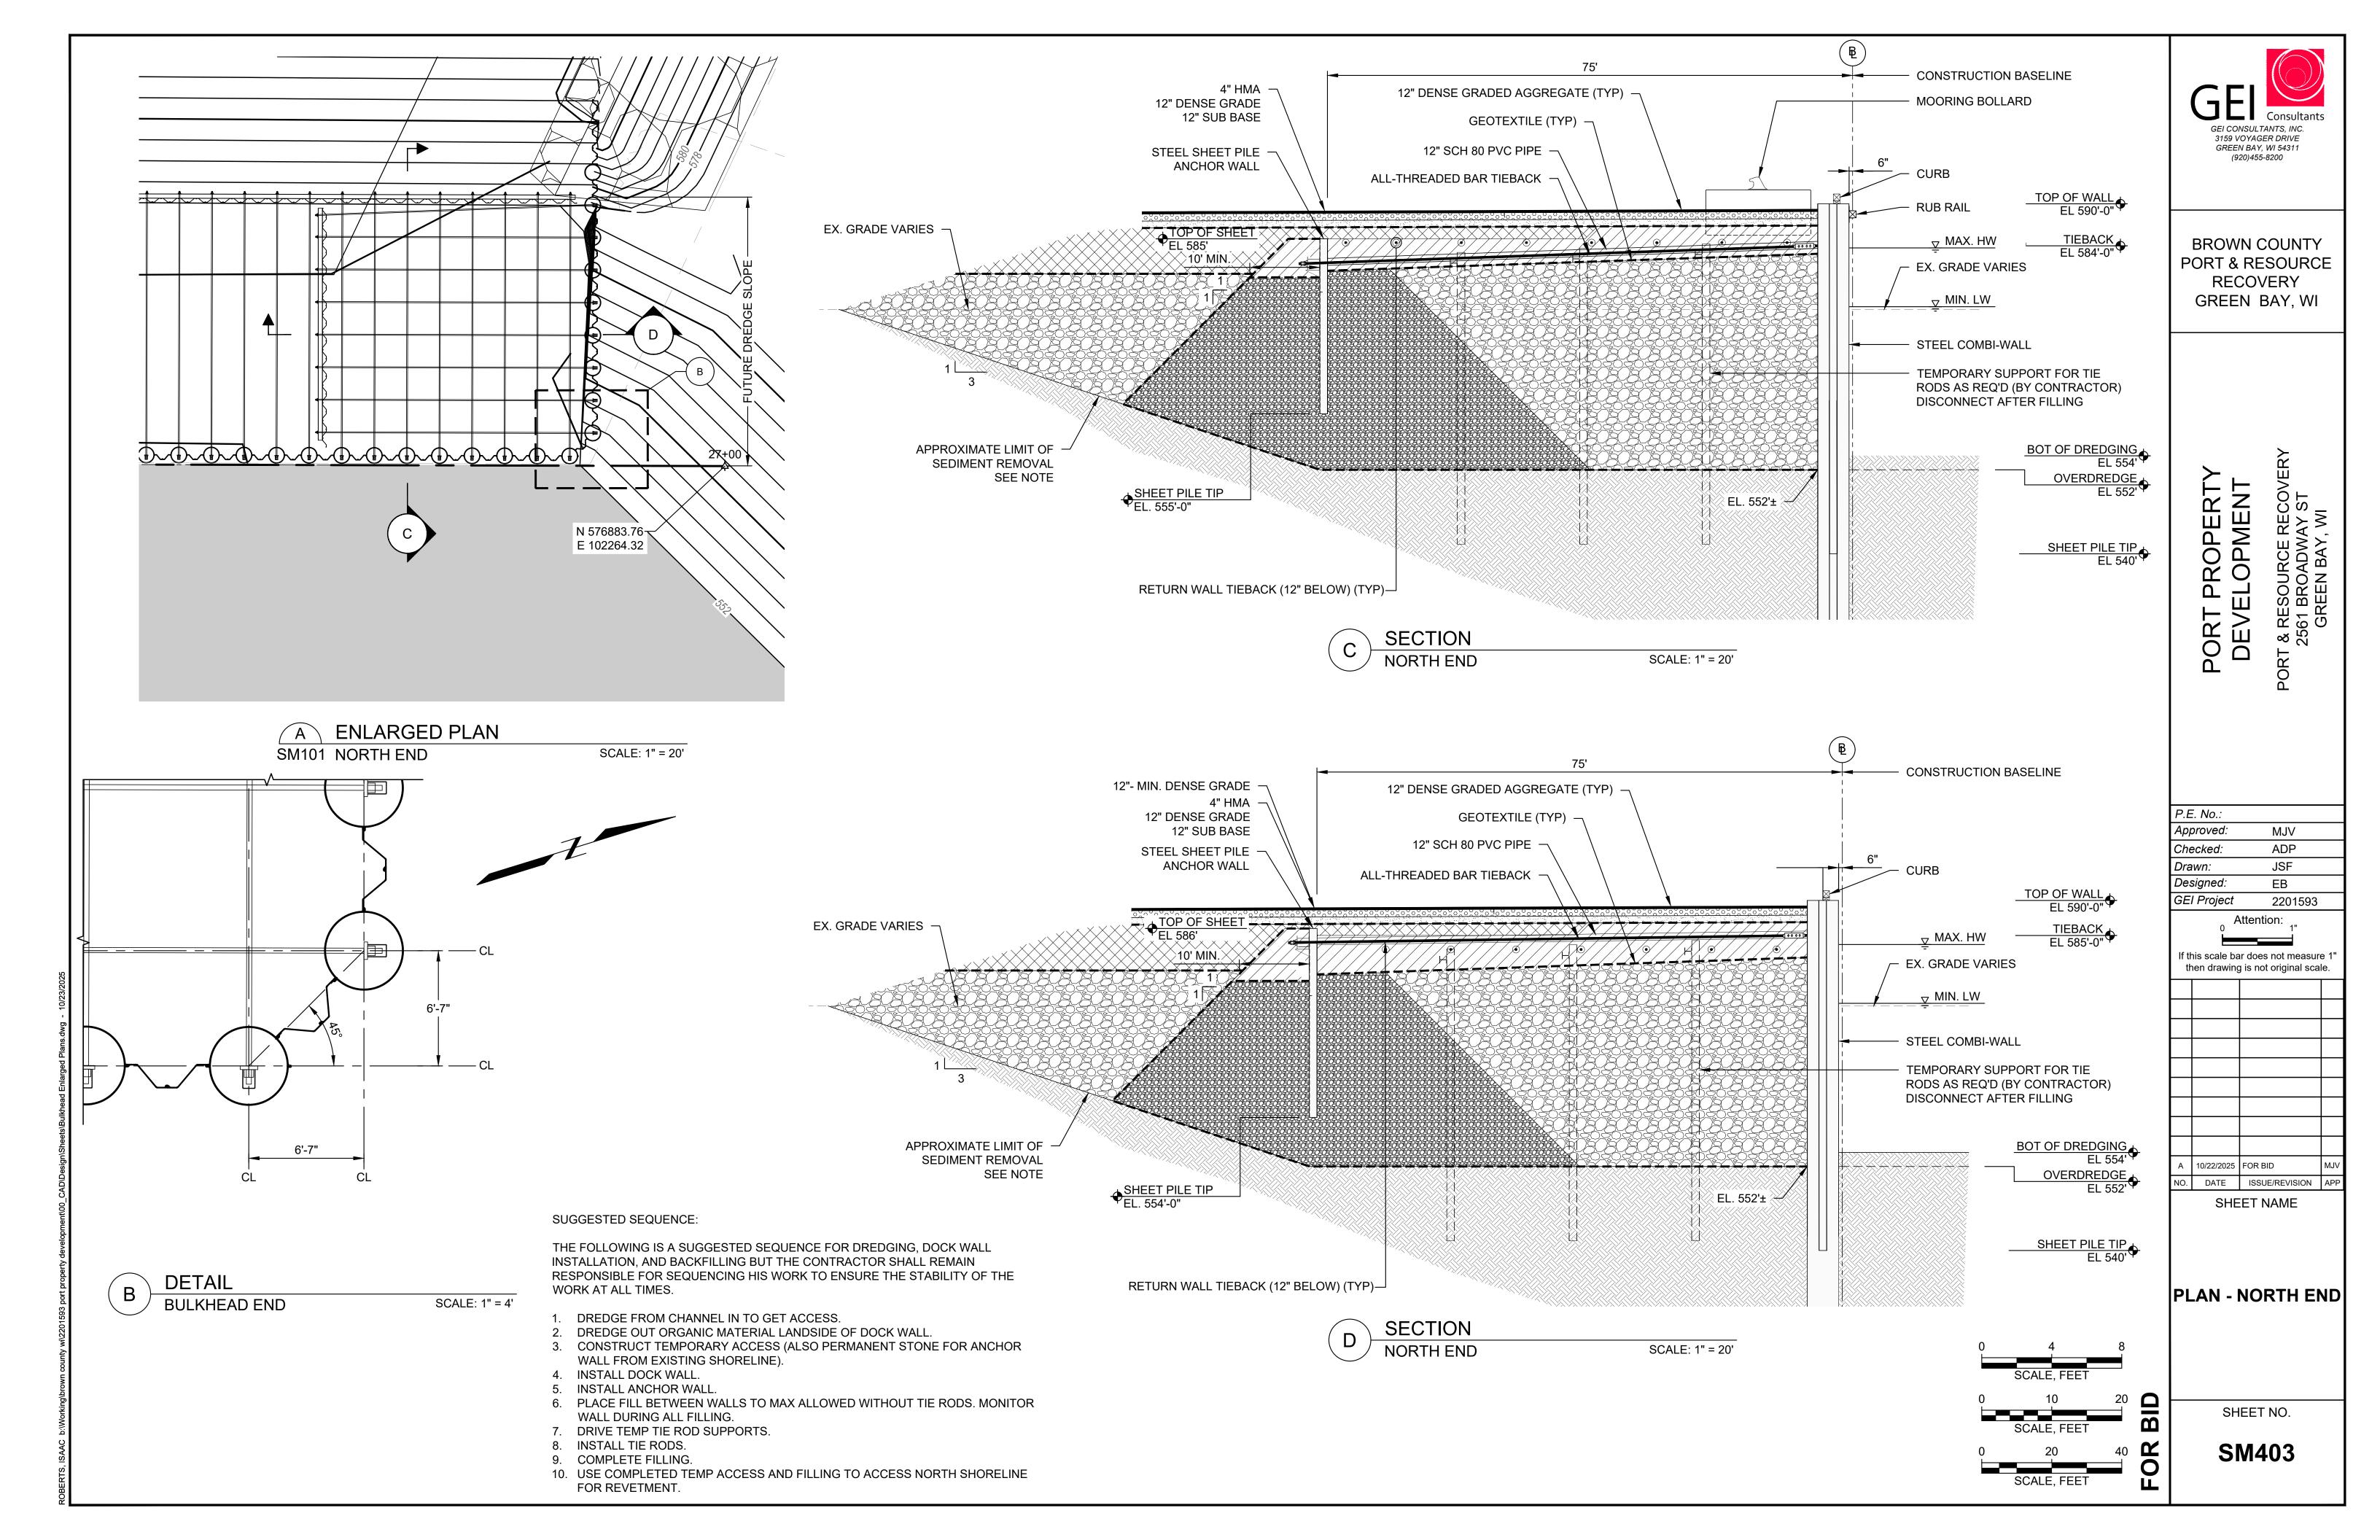

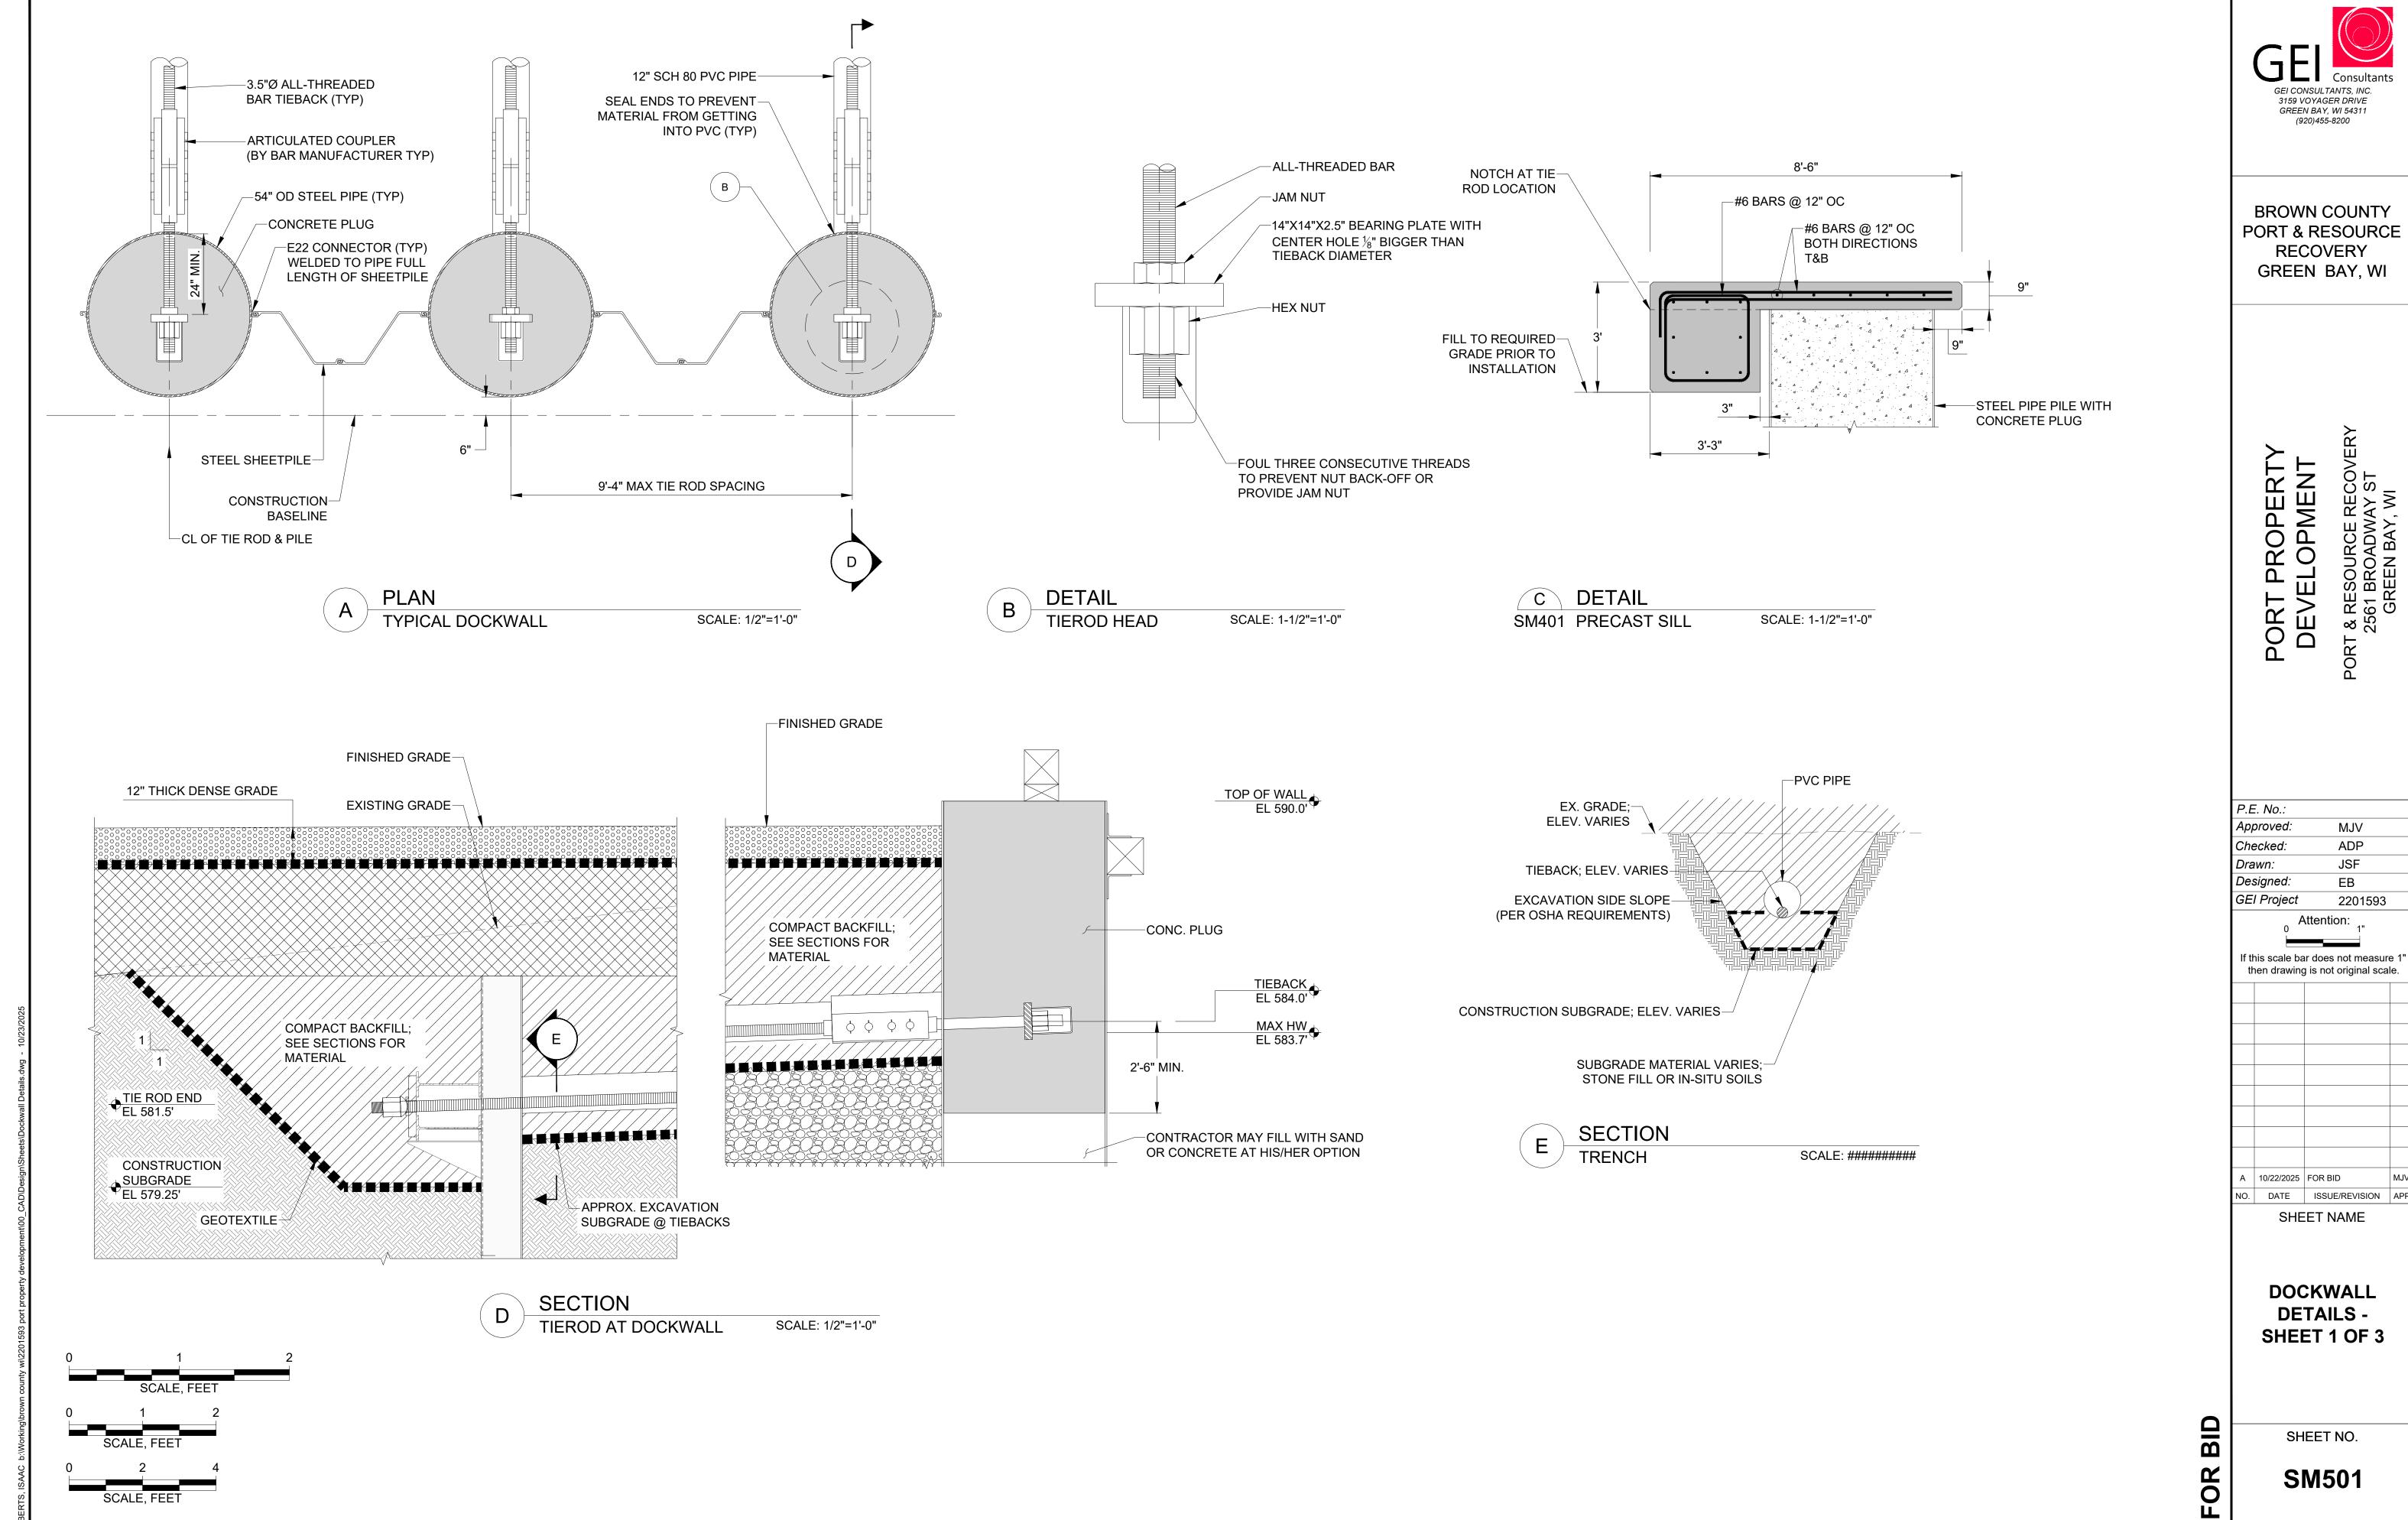

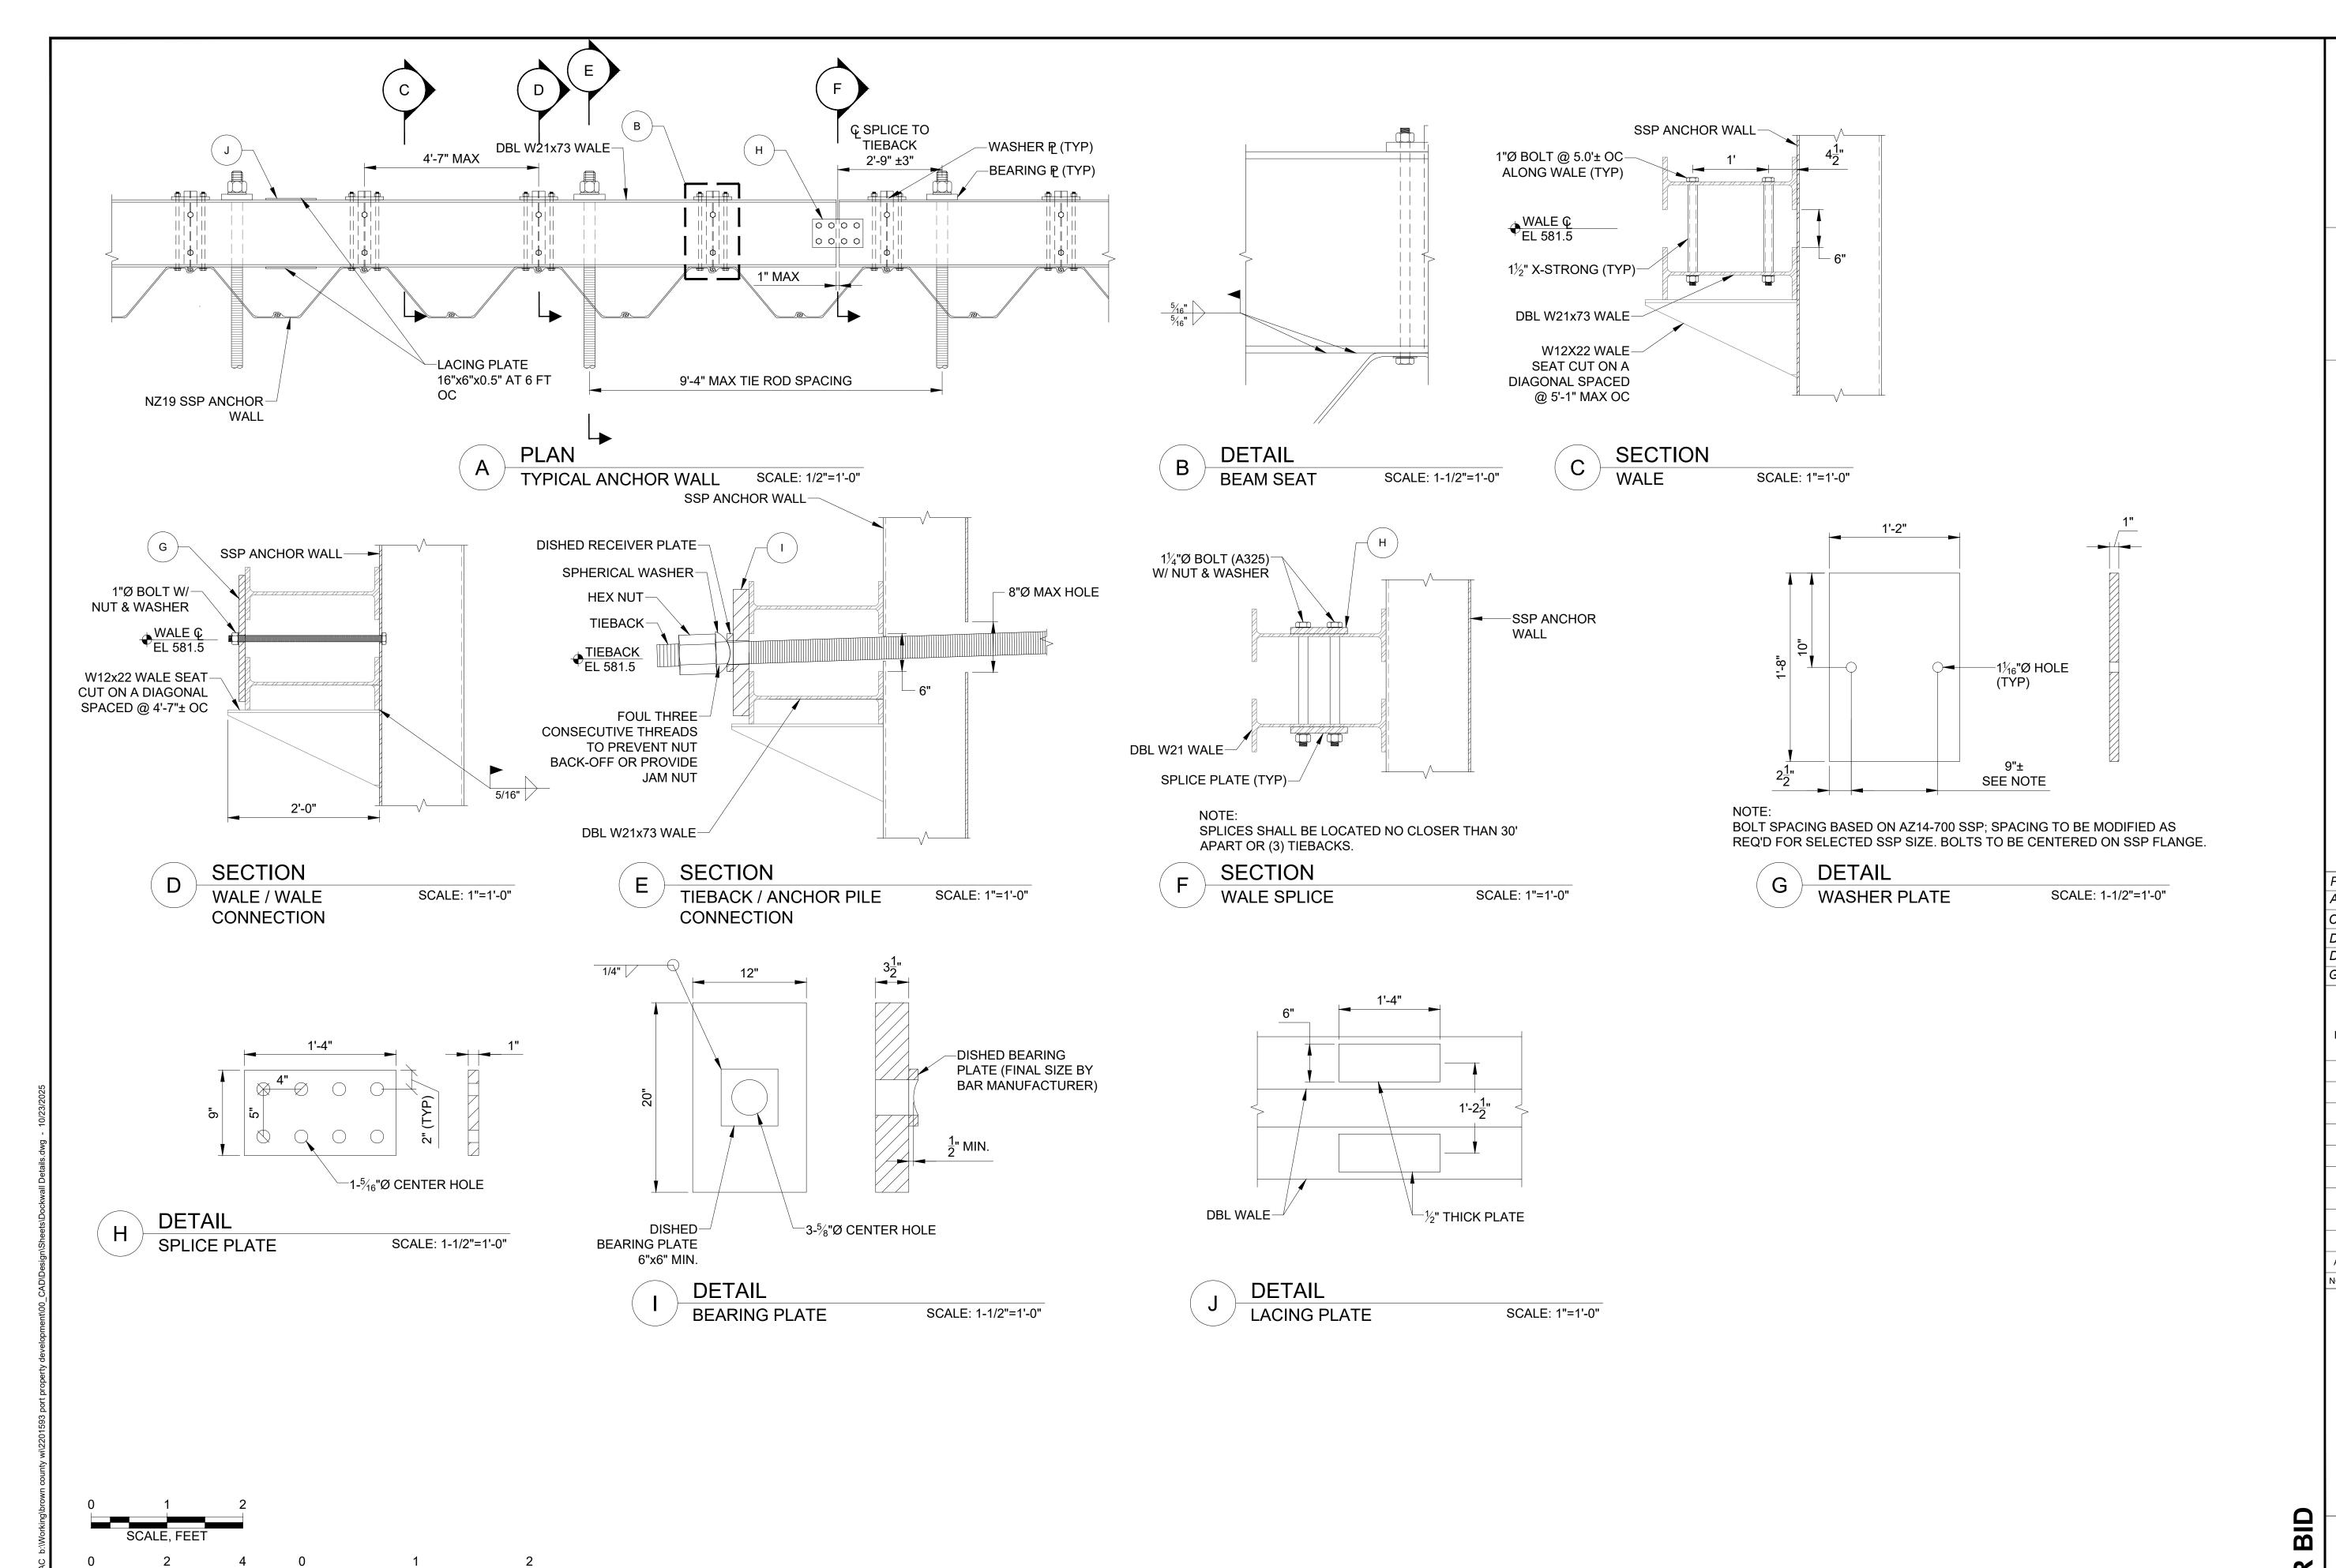

3159 VOYAGER DRIVE GREEN BAY, WI 54311 (920)455-8200

BROWN COUNTY PORT & RESOURCE RECOVERY

GREEN BAY, WI

PORT PROPERTY DEVELOPMENT **PORT**

P.E. No.: Approved: MJVADP Checked: JSF Drawn: Designed: EB GEI Project 2201593


Attention:

then drawing is not original scale.

10/22/2025 FOR BID NO. DATE ISSUE/REVISION API SHEET NAME

> **DOCKWALL DETAILS** -SHEET 2 OF 3

> > SHEET NO.

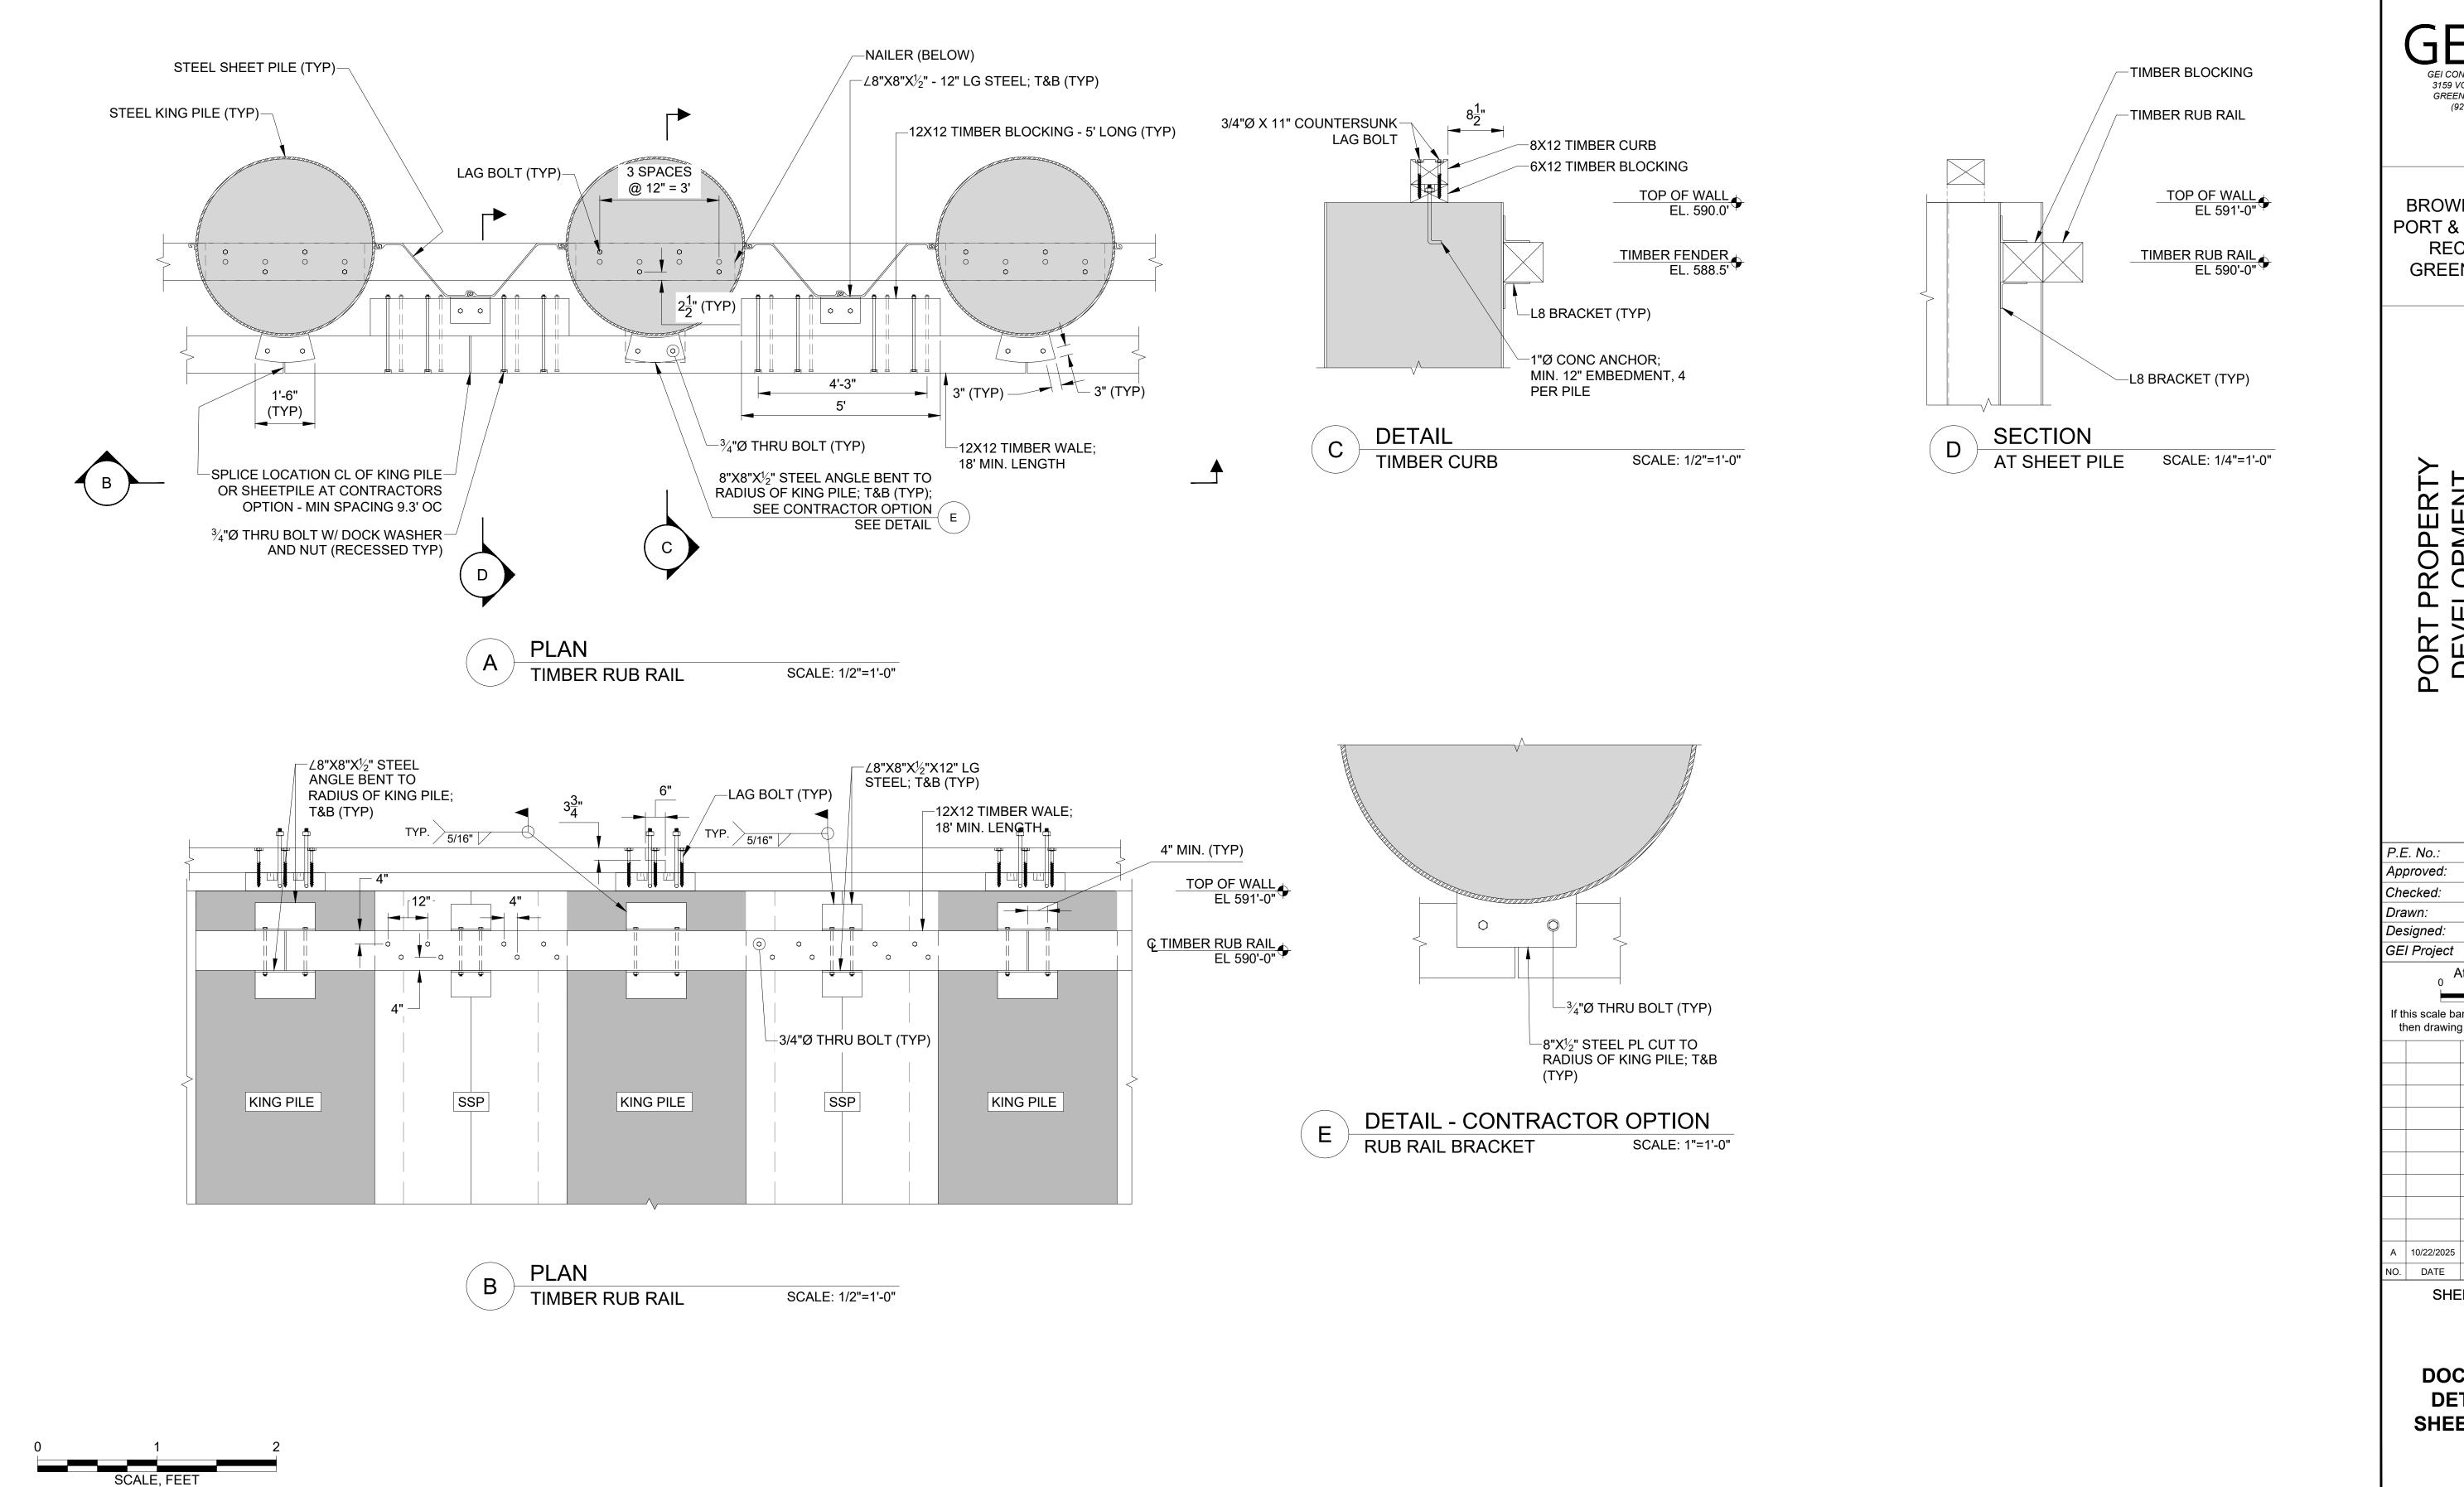

GEI CONSULTANTS, INC. 3159 VOYAGER DRIVE GREEN BAY, WI 54311 (920)455-8200

BROWN COUNTY PORT & RESOURCE RECOVERY GREEN BAY, WI

k RESOURCE RECOVERY 561 BROADWAY ST GREEN BAY, WI

PORT PROPERTY DEVELOPMENT **PORT**

P.E. No.: Approved: MJVADP Checked: JSF Drawn: Designed: 2201593

Attention:

then drawing is not original scale.


10/22/2025 FOR BID NO. DATE ISSUE/REVISION APP


SHEET NAME


DOCKWALL DETAILS -SHEET 3 OF 3

SHEET NO.

BID

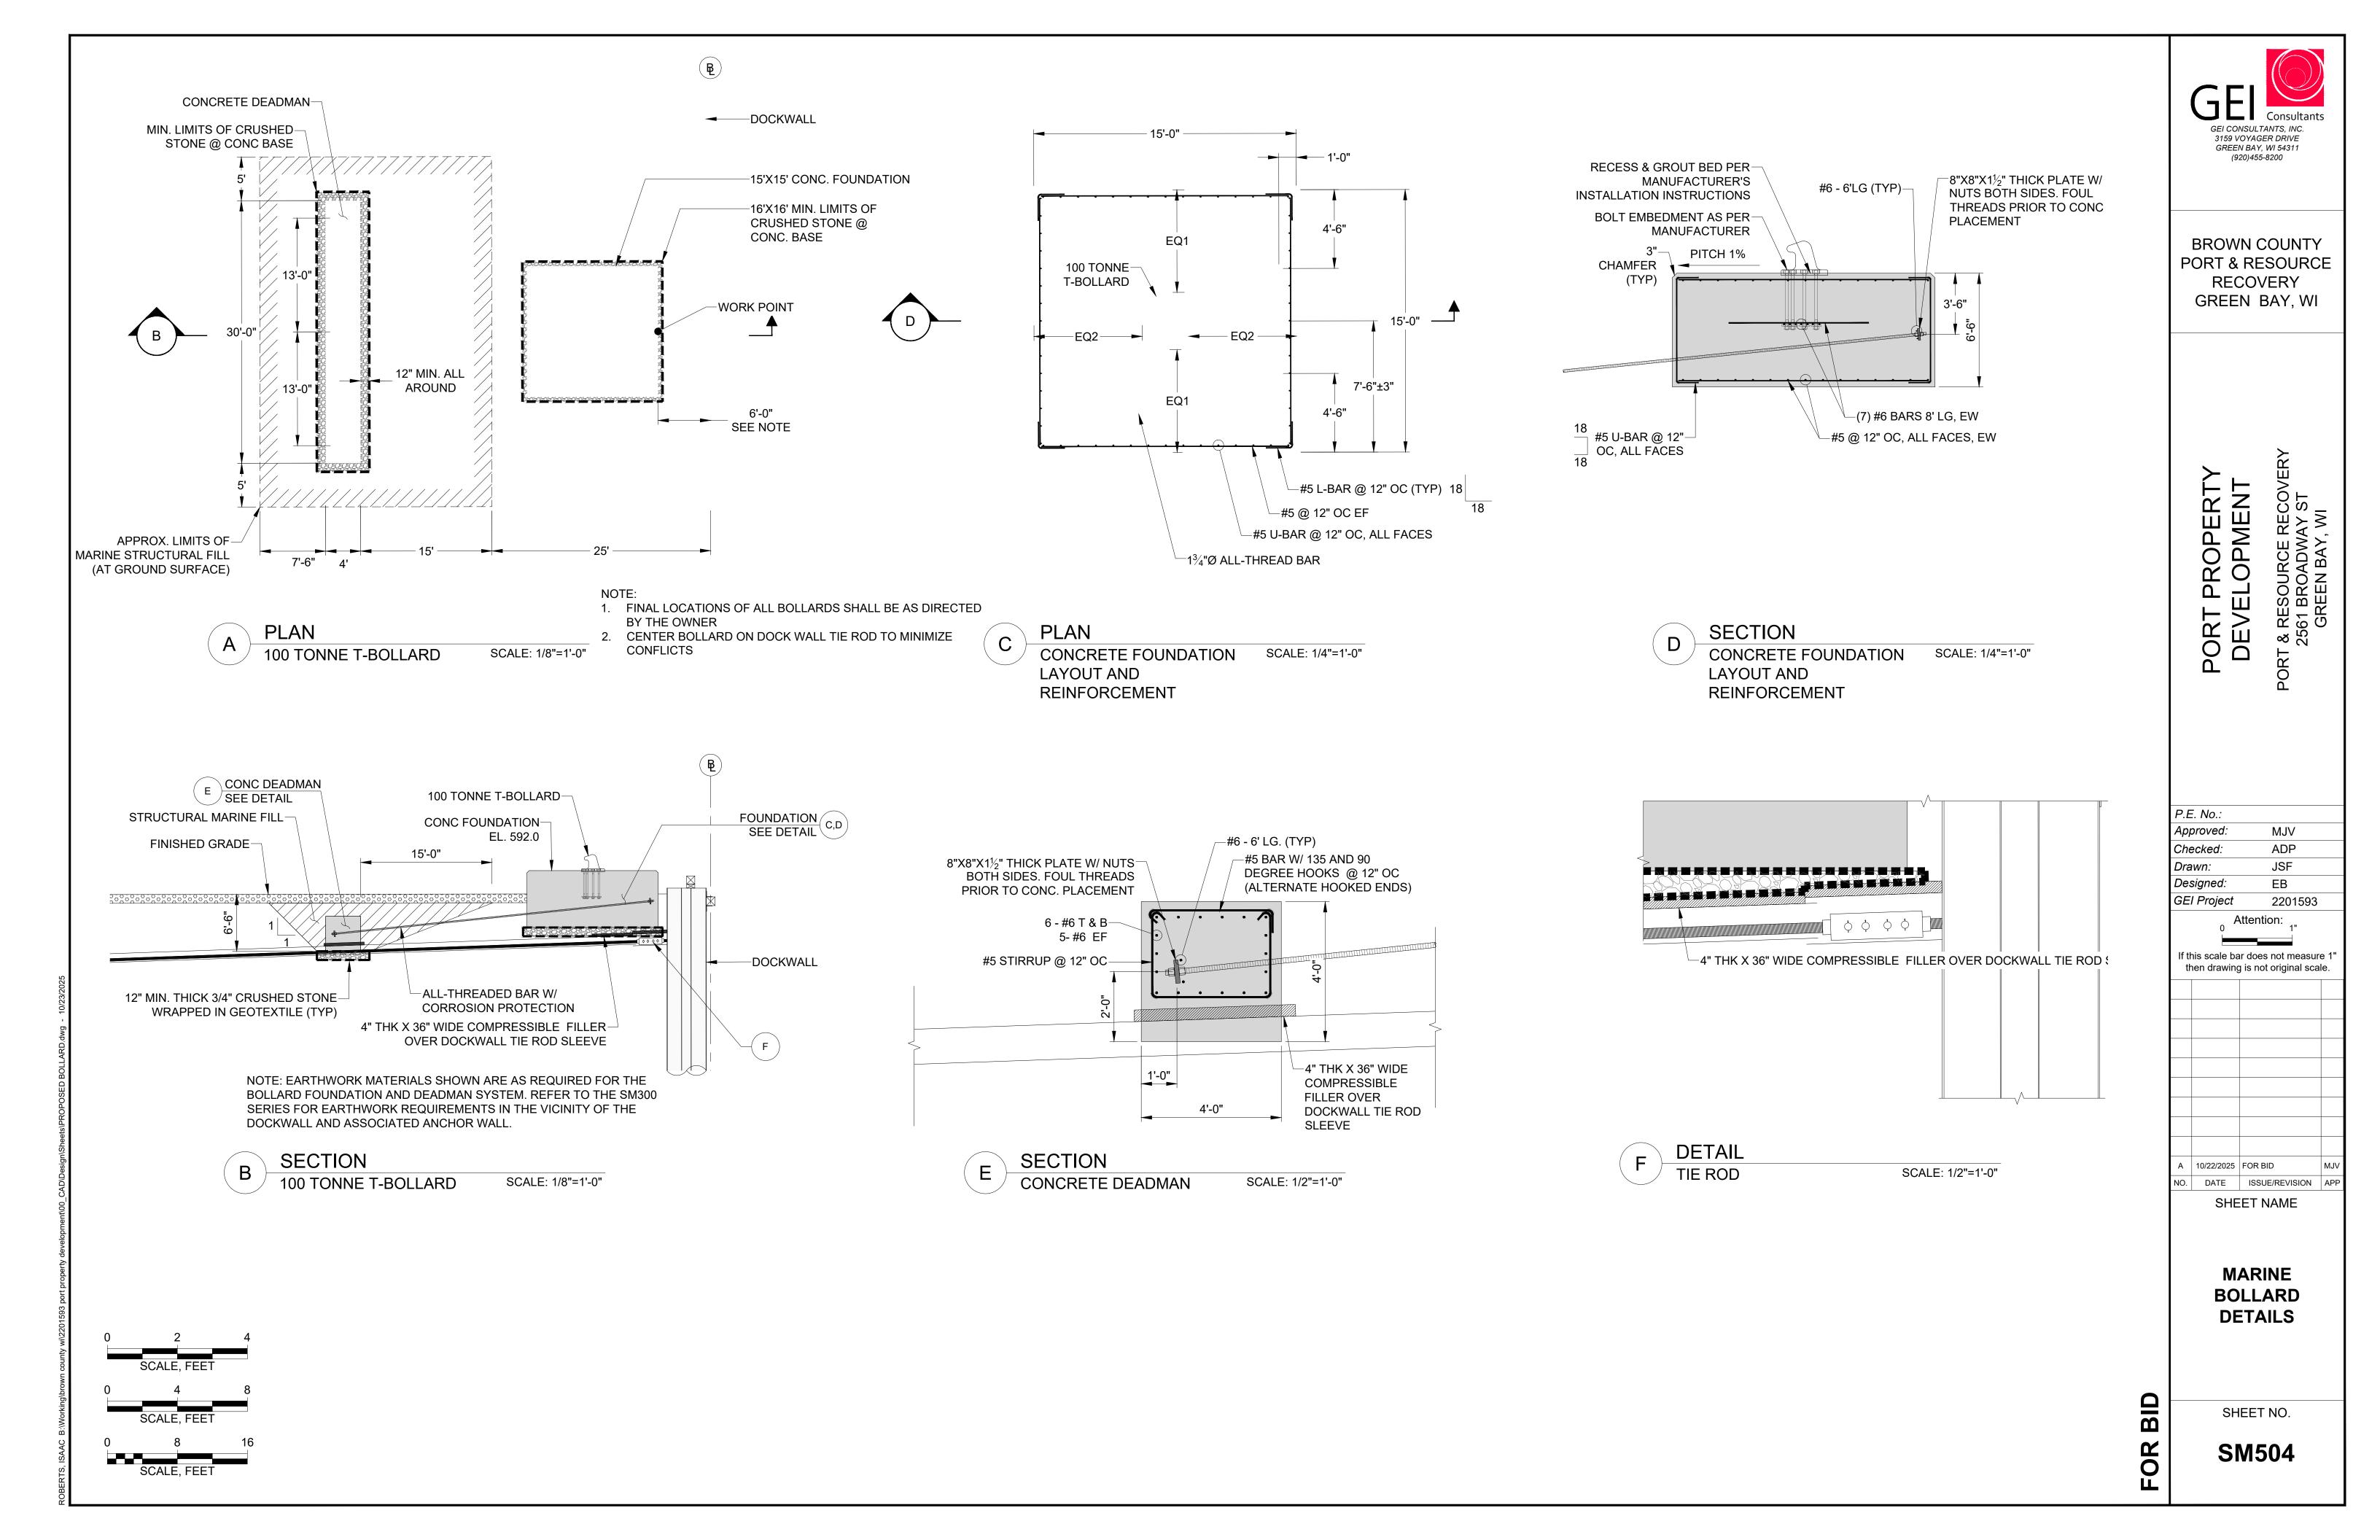

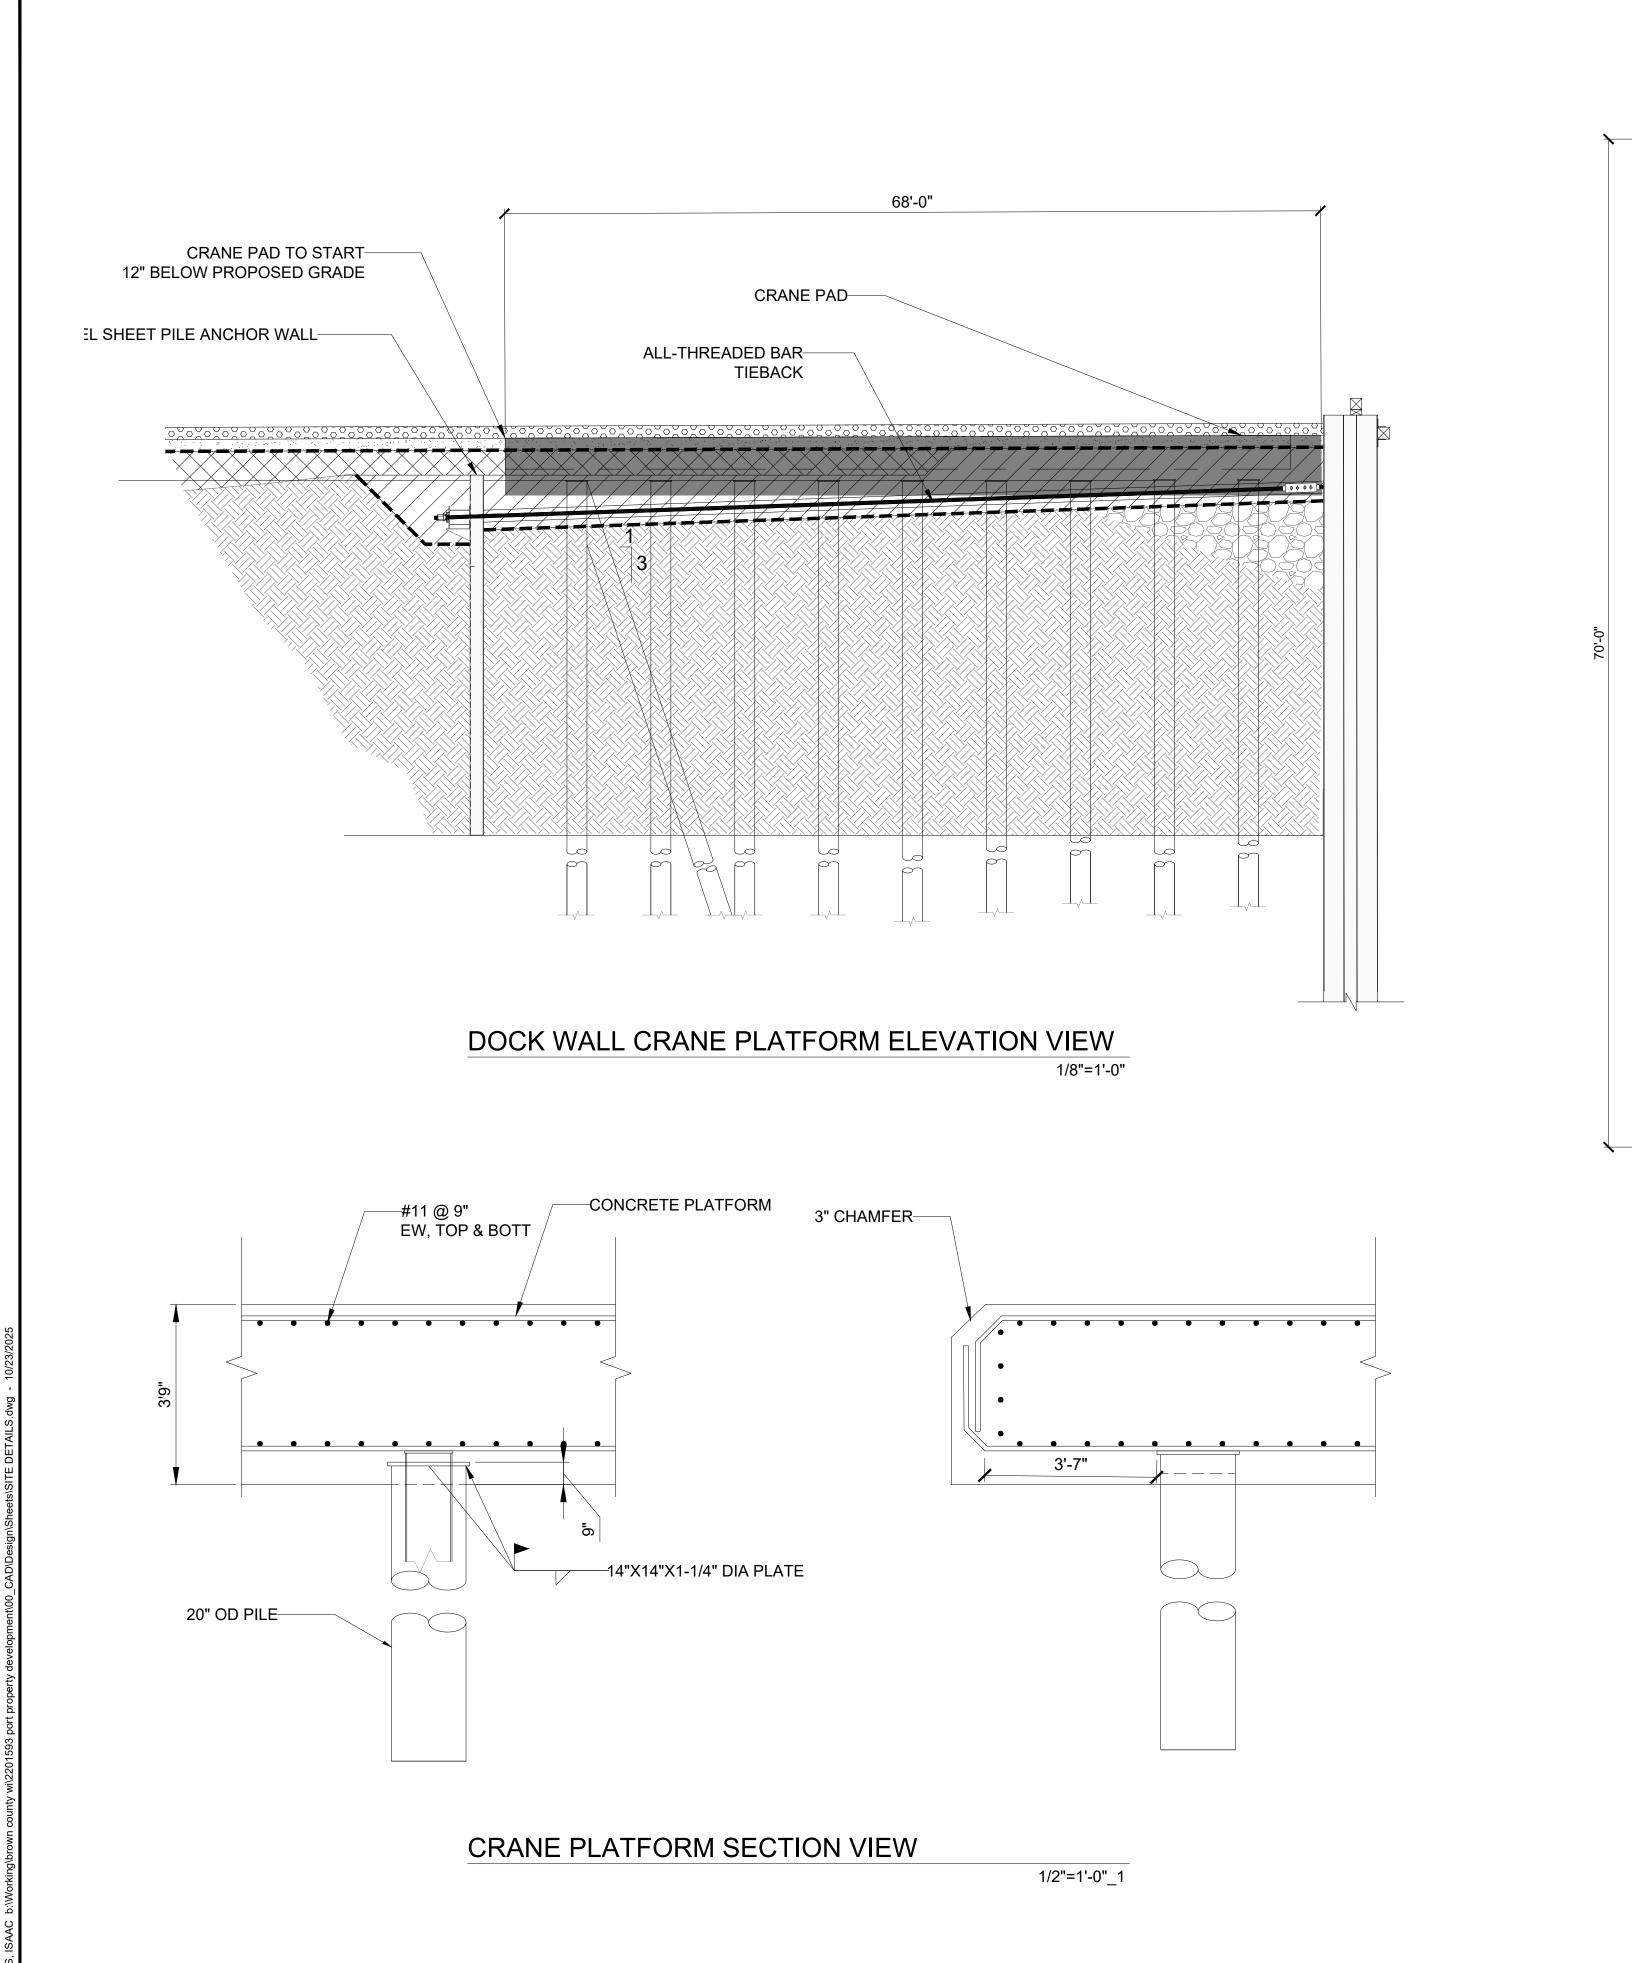

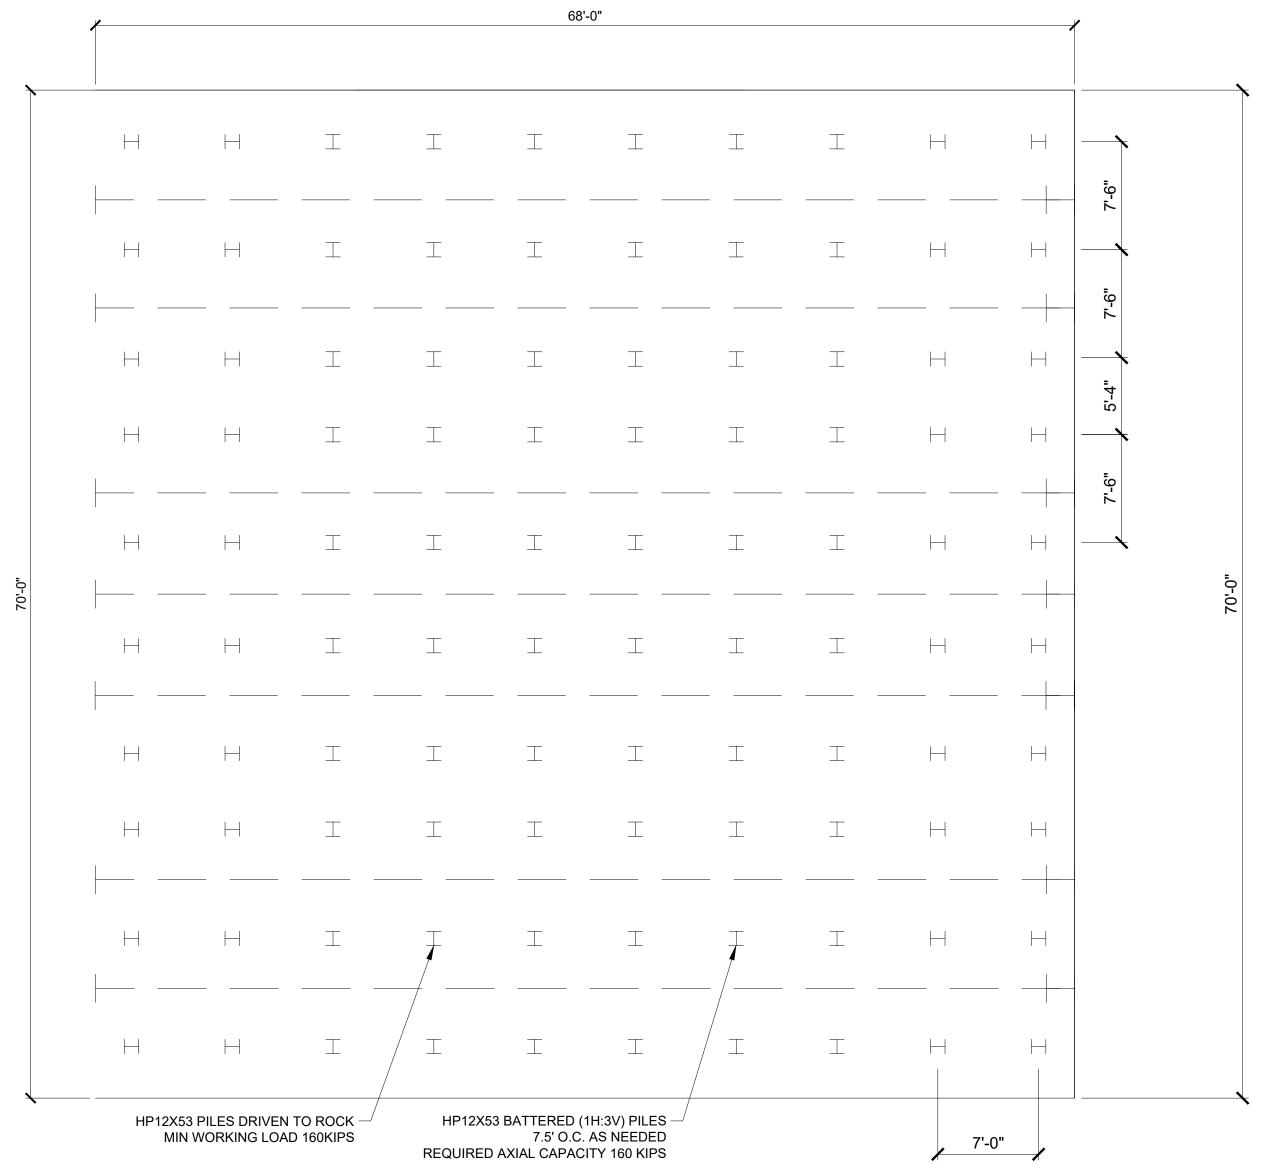

DOCK WALL CRANE PLATFORM PLAN VIEW

1" = 80'

<u>DESIGN LIVE LOADS</u>
MAX CRAN E AND LIFT WEIGHT COMBINED 2400 KIPS

MAX UNIFORM LOAD 2 KIPS/SF

PRELIMINARY - FOR BIDDING ONLY NOT FOR CONSTRUCTION

Consultants

GEI CONSULTANTS, INC.

3159 VOYAGER DRIVE

GREEN BAY, WI 54311

(920)455-8200

BROWN COUNTY PORT & RESOURCE RECOVERY GREEN BAY, WI

T PROPERTY
/ELOPMENT

P.E. No.:
Approved: MJV
Checked: GMM
Drawn: INR
Designed: INR
GEI Project 2201593

o 1"


If this scale bar does not measure 1"
then drawing is not original scale.

A 10/22/2025 FOR BID MJV
NO. DATE ISSUE/REVISION APP

SHEET NAME

CRANE PAD DETAIL

SHEET NO.

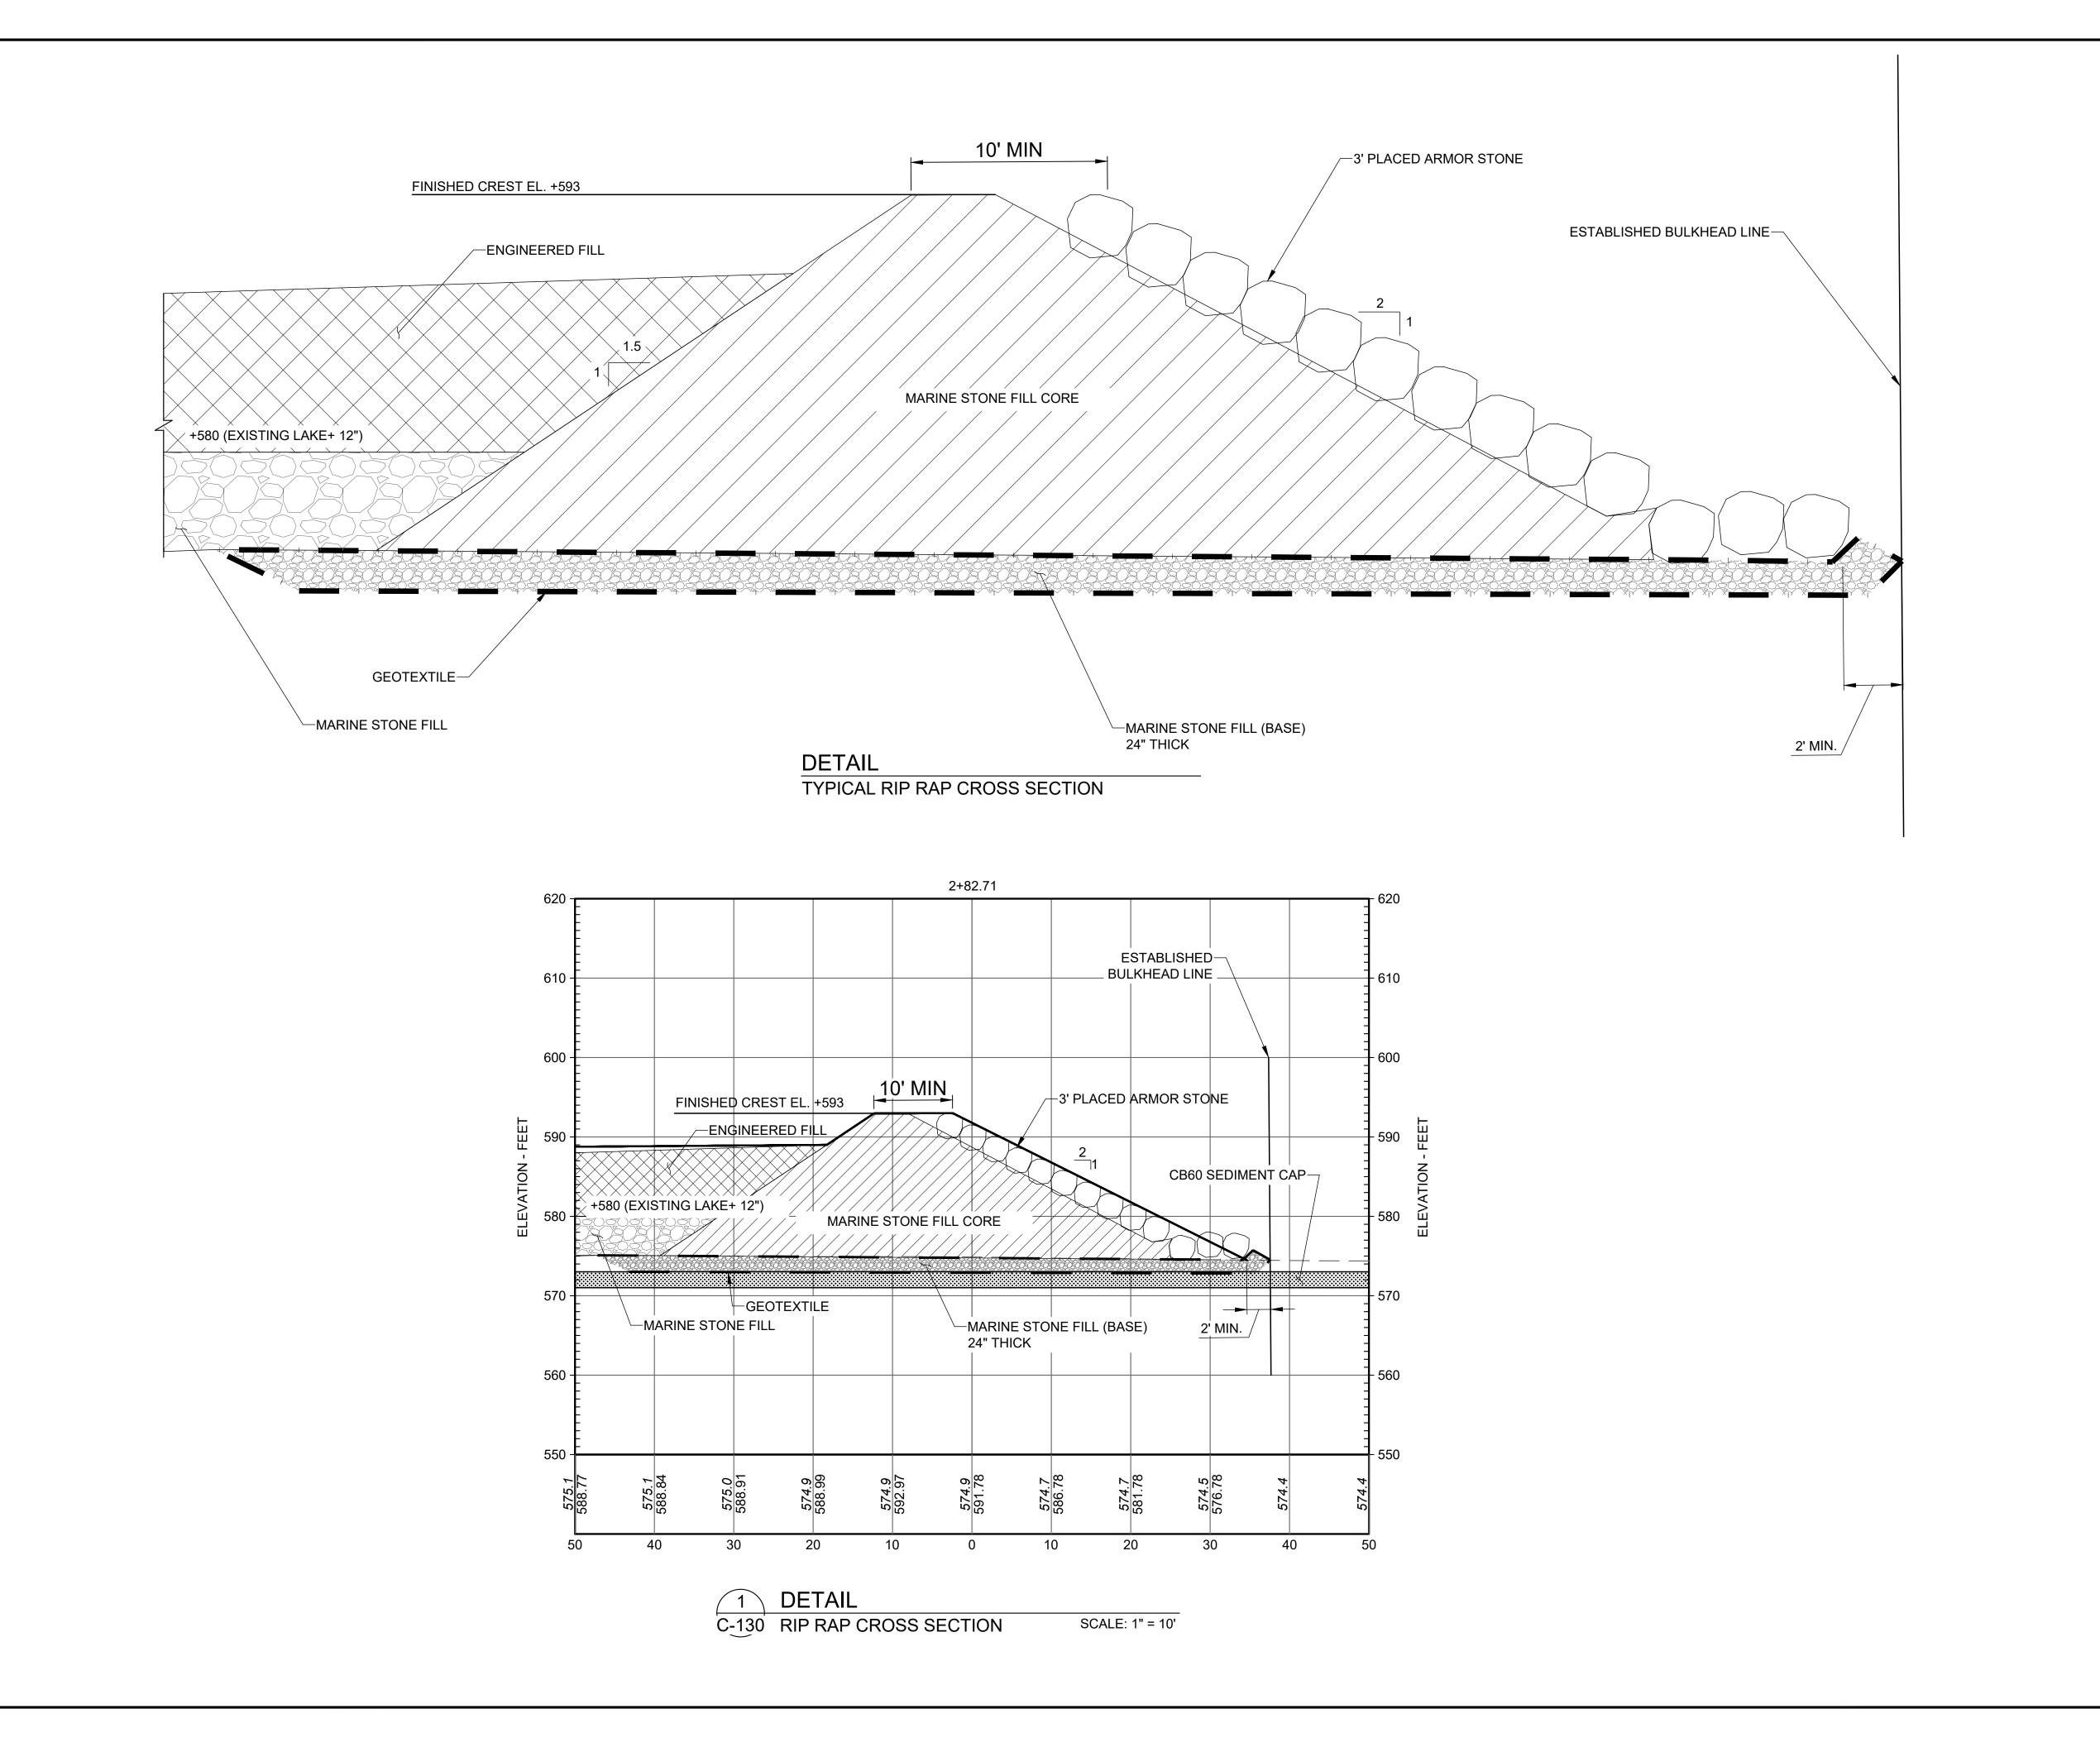

GEI CONSULTANTS, INC. 3159 VOYAGER DRIVE GREEN BAY, WI 54311 (920)455-8200

BROWN COUNTY PORT & RESOURCE RECOVERY


GREEN BAY, WI

PORT PROPERTY DEVELOPMENT

P.E. No.:	
Approved:	MJV
Checked:	GMM
Drawn:	INR
Designed:	INR
GEI Proiect	2201593

Attention:

then drawing is not original scale.

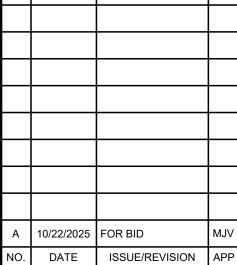

SHEET NAME

REVETMENT SECTIONS 1

SHEET NO.

SR301

BID FOR

5+14.57 ESTABLISHED-BULKHEAD LINE 610 -- 610 600 - 600 \sim 3' PLACED ARMOR STONE FINISHED CREST EL. +593 -ENGINEERED FIL - 590 CB60 SEDIMENT CAP-+580 (EXISTING LAKE+ 12") MARINE STONE FILL CORE - 580 570 - 570 GEOTEXTILE MARINE STONE FILL MARINE STONE FILL (BASE) 2' MIN 24" THICK EXISTING SEDIMENTS 560 SHEETPILE - 560 SUPPORT WALL NATIVE CLAY

> DETAIL C-130 RIP RAP CROSS SECTION SCALE: 1" = 10'

574.9 581.78

574.9 576.78

574.9 592.96

ESTABLISHED-BULKHEAD LINE . 610 - 610 600 - 600 FINISHED CREST EL. +593 ─3' PLACED ARMOR STONE <u>ENGINEERED FIL</u> - 590 +580 (EXISTING LAKE+ 12") MARINE STONE FILL CORE - 580 570 -GEOTEXTILE MARINE STONE FILL MARINE STONE FILL (BASE) 2' MIN / 24" THICK 560 - 560

SCALE: 1" = 10'

DETAIL

C-130 RIP RAP CROSS SECTION

7+78.81

620 -

3159 VOYAGER DRIVE GREEN BAY, WI 54311 (920)455-8200


BROWN COUNTY PORT & RESOURCE RECOVERY GREEN BAY, WI

PORT PROPERTY DEVELOPMENT

P.E. No.: Approved: MJVGMM Checked: INR Drawn: Designed: INR GEI Project 2201593

Attention:

If this scale bar does not measure 1" then drawing is not original scale.

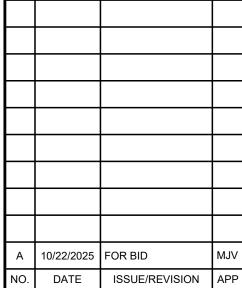

SHEET NAME

REVETMENT SECTIONS 2

SHEET NO.

SR302

BID